

# Jekyll Documentation Theme for Designers

version 3.0

*Last generated: August 12, 2015*

---



Company  
logo

© 2015 Your company's copyright information...

All rights reserved. No part of this book may be reproduced in any form or by any electronic or mechanical means, including information storage and retrieval systems, without written permission from the author, except in the case of a reviewer, who may quote brief passages embodied in critical articles or in a review.

Trademarked names appear throughout this book. Rather than use a trademark symbol with every occurrence of a trademarked name, names are used in an editorial fashion, with no intention of infringement of the respective owner's trademark.

The information in this book is distributed on an "as is" basis, without warranty. Although every precaution has been taken in the preparation of this work, neither the author nor the publisher shall have any liability to any person or entity with respect to any loss or damage caused or alleged to be caused directly or indirectly by the information contained in this book.

# Table of Contents

## Getting started

Introduction .....	1
Get started with this theme .....	3
Configuration options.....	7
Theme customization .....	15
Supported features .....	18

## Authoring

Pages .....	24
WebStorm Text Editor.....	31
Series.....	33
Collections.....	36

## Navigation

Sidebar navigation.....	37
Top navigation.....	43
Tags.....	45

## Formatting

Tooltips.....	51
Alerts .....	52
Icons.....	55
Images.....	60
Labels .....	62
Links .....	63
Navtabs .....	66
Video embeds .....	69
Tables.....	72
Syntax highlighting .....	76

## Single-sourcing

Conditional logic.....	78
Content reuse.....	83

## Publishing

Build arguments .....	85
Themes.....	88
Generating PDFs .....	89
Exclude files .....	100
Help API and UI tooltips .....	102
Search configuration .....	111
iTerm profiles.....	0
Pushing builds to server .....	114

## Special layouts

Knowledge-base layout.....	115
Scroll layout.....	118
Shuffle .....	125
FAQ pages.....	127
Glossaries.....	128

## Tag archives

Tag archives overview .....	131
-----------------------------	-----

# Introduction

## Overview

This site provides documentation, training, and other notes for the Jekyll Documentation theme. There's a lot of information about how to do a variety of things here, and it's not all unique to this theme. But by and large, understanding how to do things in Jekyll depends on how your theme is coded.

## Survey of features

Some of the more prominent features of this theme include the following:

- Bootstrap framework
- Sidebar with page hierarchy
- PDF generation (with Prince XML utility)
- Notes, tips, and warning information notes
- Tags
- Single sourced outputs
- Emphasis on pages, not posts
- Relative (rather than absolute) link structure

I'm using this theme for my documentation projects, building about 15 different outputs for various products, versions, languages, and audiences from the same set of files. This single sourcing requirement has influenced how I constructed this theme.

For more discussion about the available features, see [Supported features](#) (page 18).

## Getting started

To get started, see these three topics:

1. [Getting started with this theme](#) (page 3)
2. [Configuration settings](#) (page 7)

### 3. [Customizing the theme](#) (page 15)

## PDF Download

If you would like to download this help file as a PDF, you can do so here. The PDF most of the same content as the online help, except that some elements (such as video or special layouts) don't translate the the print medium, so they're excluded.

 PDF Download

The PDF contains a timestamp in the header indicating when it was last generated. If you download a PDF, keep in mind that it may go out of date quickly. Always compare your PDF timestamp against the online help timestamp (which you can find in the footer).

# Getting started with this theme

## Step 1: Set up the prerequisites

Before you start installing the theme, make sure you have all of these prerequisites in place.

- **Mac computer (recommended).** If you have a PC, you need to see [Jekyll on Windows](http://jekyllrb.com/docs/windows/) (<http://jekyllrb.com/docs/windows/>). Make sure you can get Jekyll working on Windows before proceeding.
- **Ruby** (<https://www.ruby-lang.org/en/>). On a Mac, this should already be installed. Open your Terminal and type `which ruby` to confirm.
- **Rubygems** (<https://rubygems.org/pages/download>). This is a package manager for Ruby. Type `which gem` to confirm.
- **Jekyllrb** (<http://jekyllrb.com/>). To install: `gem install jekyll`. Type `which jekyll` to confirm that Jekyll is installed.
- **Text editor** (some examples: Sublime Text, Atom, WebStorm, IntelliJ)
- **iTerm** (<http://iterm.sourceforge.net/>) - Optional but recommended instead of Terminal.
- **pygments** (<http://pygments.org/download/>) - Pygments handles syntax highlighting. In my experiments, the Pygments highlighter seemed better than the default rouge highlighter. To install Pygments, you will need Python installed. (If you don't install pygments, you'll get an error when you build the theme.) To check if Python is installed, type `which python`. To install Pygments: `gem install pygments.rb`. If you want to use rouge instead, change pygments to rouge in the configuration files.

## Step 2: Build the theme

Before you start customizing the theme, make sure you can build the theme with the default content and settings first.

1. Download the theme from the [documentation-theme-jekyll Github repository](https://github.com/tomjohnson1492/documentation-theme-jekyll) (<https://github.com/tomjohnson1492/documentation-theme-jekyll>) and unzip it into your `~username/projects` folder.

You can either download the theme files directly by clicking the **Download Zip** button on the right of the repo, or use git to clone the repository to your local machine. Note, however, that you won't be using the pull command to update the theme since you'll be customizing it with your own content and won't want to overwrite those customizations, so there isn't a need to clone it.

2. After downloading the theme, note some unique aspects of the file structure:
  - Although there's a `_config.yml` file in the root directory, it's there only so that Github Pages will build the theme. Because the theme is set up for single sourcing, there's a separate configuration file for each unique output you're building.
  - All the configuration files are stored in the `configs` directory. Each configuration file has a different preview port.
  - Each configuration file specifies a different project and potentially a different audience, product, platform, and version. By setting unique values for these properties in the `includes/custom/conditions.html` file, you determine how the sidebar and top navigation get constructed.
  - You can build all the outputs in your `configs` directory by running the `doc_multibuild_web.sh` file in the root directory.

✓ **Tip:** The main goal of this theme is to enable single sourcing. With single sourcing, you build multiple outputs from the same source, with somewhat different content in each site based on the particular product, platform, version, and audience. You don't have to use this theme for single sourcing, but most tech writing projects involve this requirement.

There are four configuration files in this project: `config_writer.yml` and `config_designer.yml` as well as their PDF equivalents. The idea is that there's an output specific to writers, and an output specific to designers.

In reality, both of these outputs are pretty much the same. However, for the writers output, I've conditionally excluded more lengthy explanations about how the theme works. The idea is that writers just want to create and publish content; in contrast, designers want to understand and modify the theme itself. Also, the configuration files use different themes.

3. Build the writer's output:

```
jeekyll serve --config configs/config_writers.yml
```

The `--config` parameter specifies the location of the configuration file to be used in the build. The configuration file itself contains the destination location for where the site gets built.

Open a new tab in your browser and preview the site at the preview URL shown.

4. Press **Ctrl+C** in Terminal to shut down the writer's output.
5. Build the designers output:

```
jeekyll serve --config configs/config_designers.yml
```

Open a new tab in your browser and preview the site at the preview URL shown. Notice how the themes differ (designers is blue, writers is green).

6. Press **Ctrl+C** in Terminal to shut down the designer's output.
7. Build both themes by running the following command:

```
. doc_multibuild_web.sh
```

The themes build in the `../doc_designers` and `../doc_writers` folders. Use finder and browse to one level above where you installed the project (probably `username/projects`).

Open the writers and designers folders and click the `index.html` file. The themes should launch and appear similar to their appearance in the preview folder. This is because the themes are build using a relative link structure, so you can move the theme to any folder you want without breaking the links.

If the theme builds both outputs successfully, great. You can move on to the other sections. If you run into errors building the themes, try to solve them before moving on. See [Troubleshooting](#) (page 0) for more information.

✓ **Tip:** You can set up profiles in iTerm to initiate all your builds with one selection. See [iTerm profiles](#) (page 0) for details.

More information about building the PDF versions is provided in [Generating PDFs](doc_generating_pdfs.html).

## Questions

If you have questions, contact me at [tomjohnson1492@gmail.com](mailto:tomjohnson1492@gmail.com). My regular site is <http://idratherbewriting.com> (page 0). I'm eager to make these installation instructions as clear as possible, so please let me know if there are areas of confusion that need clarifying.

## Configuration settings

**Summary:** The configuration file contains important settings for your project. Some of the values you set here affect the display and functionality of the theme.

### Importance of Configuration File

The configuration file serves important functions with single sourcing. For each site output, you create a unique configuration file for that output.

The configuration file contains all the settings and other details unique to that site output, such as variables, titles, output directories, build folders, and more.

**⚠ Warning:** This theme is coded to look for specific values set by the configuration file. If something isn't working correctly, check to make sure that you have the configuration values that are defined here.

### Configuration file options

Some of the options you can set in the configuration file determine theme settings.

Note that you can define arbitrary key-value pairs in the configuration file, and then you can access them through `site.yourkey`, where `yourkey` is the name of the key. However, the values in these tables are used to control different aspects of the theme and are not arbitrary key-value pairs.

### Configuration settings for web outputs

FIELD	REQUIRED?	DESCRIPTION
<b>project</b>	Required	A unique name for the project. The <code>_includes/cus-tom/{project}/conditions.html</code> file will use this project name to determine what sidebar and top nav data files to use. Make this value unique.

FIELD	REQUIRED?	DESCRIPTION
<b>audience</b>	Required	The audience for the output. Each entry in <code>_data/sidebar_doc.yml</code> and <code>_data/topnav_doc.yml</code> needs to have an audience attribute that matches the value here in order for the sidebar or topnav item to be included.
<b>platform</b>	Required	The platform for the output. See additional information in audience.
<b>product</b>	Required	The product for the output. See additional information in audience.
<b>version</b>	Required	The version for the output. See additional information in audience.
<b>destination</b>	Required	The folder where the site is built. If you put this into your same folder as your other files, Jekyll may start building and rebuilding in an infinite loop because it detects more files in the project folder. Make sure you specify a folder outside your project folder, by using <code>../</code> or by specifying the absolute path, such as <code>/Applications/XAMPP/xamppfiles/htdocs/myfolder</code> .
<b>sidebar_tagline</b>	Optional	Appears above the sidebar. Usually you put some term related to the site specific build, such as the audience. In the sample theme files, the taglines are "writers" and "designers."
<b>sidebar_version</b>	Optional	Appears below the sidebar_tagline in a smaller font, usually specifying the version of the documentation. In the sample theme files, the version is "3.0."
<b>topnav_title</b>	Required	Appears next to the home button in the top nav bar. In the sample theme files, the topnav_title is "Jekyll Documentation Theme."

FIELD	REQUIRED?	DESCRIPTION
<b>homepage_title</b>	Required	You set the title for your homepage via this setting. This is because multiple projects are all using the same index.md as their homepage. Because index.md has <code>homepage: true</code> in the frontmatter, the "page" layout will use the <code>homepage_title</code> property from the configuration file instead of the traditional title in the frontmatter. In the sample theme files, the homepage title is "Jekyll Documentation Theme -- {audience}."
<b>site_title</b>	Appears in the webpage title area (on the browser tab, not in the page viewing area). In the sample theme files, the site title is the "page name	homepage title."
<b>port</b>	Required	The port used in the preview mode. This is only for the live preview and doesn't affect the published output. If you serve multiple outputs simultaneously, the port must be unique.
<b>feedback_email</b>	Gets configured as the email address in the Send Feedback button in the top navigation bar.	

FIELD	REQUIRED?	DESCRIPTION
<b>sidebar_accordion</b>	Optional	Boolean. The default value is true. Whether you want the navigation sidebar to use the accordion effect or not. The accordion effect means when you expand a section, the other sections automatically collapse. If you put <code>false</code> , then you can expand multiple sections at once. At the bottom of the navigation sidebar, two links will appear: Collapse All and Expand All.
<b>disqus_shortcode</b>	Optional	The disqus site shortname, which is used for comments. If you don't want comment forms via disqus, leave this blank or omit it altogether and Disqus won't appear.
<b>markdown</b>	Required	The processor to use for Markdown. This is a Jekyll-specific setting.
<b>redcarpet</b>	Required	Extensions used with redcarpet. You can read more about them by searching for redcarpet extensions online.
<b>highlighter</b>	Optional	The syntax highlighter used. <code>rouge</code> is also an option. I think Pygments does a better job. You will need to <a href="http://pygments.org/download/">install Pygments</a> ( <a href="http://pygments.org/download/">http://pygments.org/download/</a> ) on your machine or else you will see an error.
<b>exclude</b>	Optional	A list of files and directories that you want excluded from the build. By default, all the content in your project is included in the output.
<b>defaults</b>	Optional	Here you can set default values for frontmatter based on the content type (page, post, or collection).

FIELD	REQUIRED?	DESCRIPTION
<b>collections</b>	Optional	Any specific collections (custom content types that extend beyond pages or posts) that you want to define. This theme defines a collection called <code>tooltips</code> . You access this collection by using <code>site.tooltips</code> instead of <code>site.pages</code> or <code>site.posts</code> . Put the tooltip content types inside a folder in your project called <code>_tooltips</code> .
<b>print</b>	Optional	Boolean. Whether this build is a print build or not. This setting allows you to run conditions in your content such as <code>{% if site.print == true %} do this... {% endif %}</code> .
<b>suffix</b>	Optional	If you publish on Salesforce's <code>site.com</code> , you have to add <code>index.html</code> to the permalink or else the page won't render. If you add <code>suffix: index.html</code> in your config file, this suffix will be appended in the homepage URL. If you're not publishing to Salesforce, don't add this property to your configuration file.

## Where to store configuration files

In this theme, the configuration files are listed in the `configs` directory. There are some build scripts in the root directory that simply reference the configuration files.

## The conditional attributes

Each configuration file must specify values for the conditional attributes:

- `project`
- `product`
- `platform`
- `audience`

- version

The sidebar.html and topnav.html files apply conditional logic based on the values for these conditional attributes.

For example, you will see this kind of logic in the sidebar and topnav files:

```
{% if item.audience contains audience and item.product contains product and item.platform contains platform and item.version contains version and item.web != false %}
```

If all of these conditions are met, then the item will qualify to be included in the sidebar or top navigation file. That is why each item in the sidebar\_doc.yml or topnav\_doc.yml file includes similar properties to match:

```
- title: Pages
  url: /doc_pages.html
  audience: writers, designers
  platform: all
  product: all
  version: all
```

The file in \_includes/custom/doc/conditions.html contains a project setting and also assigns general names for each of these specific values. This way the same theme files can be used interchangeably depending on the assignments, whose values are specified in the configuration file.

It's a little complicated to describe, but it works. Once you configure your project correctly, you don't even think about how the theme is processing all of this on the backend.

## Configuration settings for PDF output

The PDF configuration files build on all the settings in the web configuration files, but they add a few more options.

When you build the PDF output (such as for the writers output), the command will look like this:

```
jeekyll serve --detach --config configs/config_writers.yml,configs/config_writers_pdf.yml
```

First Jekyll will read the `config_writers.yml` file, and then Jekyll will read the `config_writers_pdf.yml` file.

More detail about generating PDFs is provided in [Generating PDFs](#) (page 89), but the configuration settings used for the PDFs are described here.

The process for creating PDFs relies on two steps:

1. First you build a printer-friendly web version of the content.
2. Then you run PrinceXML to get all the printer-friendly web pages and package them into a PDF.

Thus, you actually build a web version for the PDF first before generating the PDF. (You might be able to remove this first step by doing more coding, but I found it easier just to strip out components I didn't want included and make other adjustments.)

FIELD	REQUIRED?	DESCRIPTION
destination		Where the PDF web version should be served so that Prince XML can find it. By default, this is in <code>../doc_designers-pdf</code> , so just one level above where your project is.
url		The URL where the files can be viewed. This is <code>http://127.0.0.1:4002</code> in the sample theme files for the designers output. Prince XML requires a URL to access the file. (My attempts to use local file paths didn't work.)
baseurl		The subdirectory after the url where the content is stored. In the sample theme files for the designers output, this is <code>/designers</code> .
port		The port required by the preview server.

FIELD	REQUIRED?	DESCRIPTION
print		A boolean so that you can construct conditional statements in your content to check whether print is true or not. This setting can help you filter out content that doesn't fit well into a PDF (such as dynamic web elements).
print_title		The title for the PDF. In the sample theme files for designers output, the print title is "Jekyll Documentation Theme for Designers"
print_subtitle		The subtitle for the PDF. In the sample theme files, the subtitle is "version 3.0."
defaults		See the sample settings in the config_designers_pdf.yml file. The only difference between this file and config_designers.yml is that the layout used for pages is page_print instead of page . The page_print layout also used head_print instead of head . This layout strips out components such as the sidebar and top navigation. It also leverages printstyles.css and includes some JavaScript for Prince XML.

# Theme customization

## About customizing the theme

The theme shows two build outputs: one for designers, and one for writers. The dual outputs is an example of the single sourcing nature of the theme. The designers output is comprehensive, whereas the writers output is a subset of the information. Follow these steps to customize the theme with your own content.

**⚠ Important:** In these instructions, I'll assume your project's name is "acme." I'll also assume you have two audiences you're building your acme project for: marketers and developers.

To customize the theme:

1. In the theme's root directory, rename `config_writer.yml` to `config_marketer.yml` and customize all the values inside that file based on the instructions in [Configuration settings](#) (page 7). Do the same with `config_designer.yml` (changing it to `config_developer.yml`) and continue to clone and customize the config file for other audiences you need.

In this theme, each output requires a separate config file. If you have 10 audiences and you want separate sites for each, then then you'll have 10 config files in this directory.

2. Make similar customizations to the PDF configuration files. You will later use these files when you create PDFs.

✓ **Tip:** As you customize the config files, make the port values unique so that you don't run into "Address already in use" issues when you build multiple sites and want to preview them at the same time.

3. In the `_includes/custom` directory, open `conditions.html` and customize the values there specific to your outputs. (Basically, replace `writer` with `developer`, and `designer` with `marketer`.)

The `conditions.html` file is used to apply different requirements to the sidebar and other files. The `conditions.html` file is included in various parts of the theme — the `sidebar.html`, the `topnav.html`, and some of the

print files. *conditions.html* is sort of the brains of the theme. If you don't have a specific value for audience, version, platform, or product, just put `all`.

4. Remove the pages that begin with "doc\_" in the root directory, and then add your own pages here. Leave all the files flat in the root directory.

If you nest files inside folders, you'll create problems for the links and the theme will break. Yes, this will result in a lot of files in the root directory, but you can get around this issue with some viewing strategies in your text editor.

For example, with WebStorm, if you press **Shift** twice and type the file name you want, the editor finds it. I usually have the preview mode open in another browser and navigate the content that way. When I want to edit a specific file, I copy the filename path from the preview browser, press **Shift** twice, and then it opens. You can also create a favorites section that just shows files you've added to Favorites (an option in the context menu).

5. Inside `_data`, open `sidebar_doc.yml` and `topnav_doc.yml` and customize the navigation.

**⚠ Warning:** Don't mess up the spacing or change any of the YML level names or the site or sidebar won't appear. Each new YML level is indented with two spaces. Sometimes getting this spacing right is tricky. I recommend you save the sample template here that shows the various levels, and then just copy and paste the levels where you need them. YML is very picky and it can be frustrating sorting out spacing and level issues.

6. In the root directory, customize the `index.md` file. This file will be the homepage for all of your projects.

Use conditional tags (for example, `{% if site.project == "writers" %} ... {% endif %}`) to change the content for different builds of your site. Store the content of the homepage in your `_includes/custom/{project_name}` folder. See for more information on applying conditions.

7. For each of your pages where you want to insert a note or callout, add `{% include linkrefs.html %}` directly below the frontmatter.

**✓ Tip:** If you're using WebStorm, you can create a Jekyll template so that the frontmatter is auto-populated when you create a new

Jekyll file. Ctrl + click the file area and choose **New > Edit File Templates**.

8. In the `_includes` folder, open `footer.html` and customize the content (namely the footer image). If you have different footers for different outputs, use conditional tags as you did with `index.md`.
9. Build your site with a command such as  
`jekyll serve --config configs/config_writers.yml` etc., and preview it at the URLs provided.

**Publishing to web hosts:** If you have multiple outputs, you probably don't want to use Github Pages to publish your site, since Github Pages looks for a `_config.yml` file in the root directory and uses that to build a site in the `gh-pages` branch of your repository. You can't instruct Github pages to look in another directory for the right configuration file. Instead, you'll probably have a better experience publishing to a Amazon Web Services S3 bucket or some other web host. See [Pushing builds to the server](#) (page 114) for more information.

## Supported features

Before you get into exploring Jekyll as a potential platform for help content, you may be wondering if it supports some basic features. The following table shows what is supported in Jekyll and this theme.

FEATURES	SUPPORTED	NOTES
Content re-use	Yes	Supports re-use through Liquid. You can re-use variables, snippets of code, entire pages, and more. In DITA speak, this includes conref and keyref.
Markdown	Yes	You can author content using Markdown syntax. This is a wiki-like syntax for HTML that you can probably pick up in 10 minutes. Where Markdown falls short, you can use HTML. Where HTML falls short, you use Liquid, which is a scripting that allows you to incorporate more advanced logic.
Responsive design	Yes	Uses Bootstrap framework.
Translation	Yes	I haven't done a translation project yet (just a pilot test). Here's the basic approach: Export the pages and send them to a translation agency. Then create a new project for that language and insert the translated pages. Everything will be translated.
PDF	Yes	You can generate PDFs from your Jekyll site. This theme uses Prince XML (costs \$495) to do the PDF conversion task. You basically set up a page that uses Liquid logic to get all the pages you want, and then you use PrinceXML (not part of Jekyll) to convert that page into a PDF.

FEATURES	SUPPORTED	NOTES
Collaboration	Yes	You collaborate with Jekyll projects the same way that developers collaborate with software projects. (You don't need a CMS.) Because you're working with text file formats, you can use any version control software (Git, Mercurial, Perforce, Bitbucket, etc.) as a CMS for your files.
Scalability	Yes	Your site can scale to any size. It's up to you to determine how you will design the information architecture for your thousands of pages. You can choose what you display at first, second, third, fourth, and more levels, etc. Note that when your project has thousands of pages, the build time will be longer (maybe 1 minute per thousand pages?). It really depends on how many for loops you have iterating through the pages.
Lightweight architecture	Yes	You don't need a LAMP stack (Linux, Apache, MySQL, PHP) architecture to get your site running. All of the building is done on your own machine, and you then push the static HTML files onto a server.
Multichannel output	Yes	This term can mean a number of things, but let's say you have 10 different sites you want to generate from the same source. Maybe you have 7 different versions of your product, and 3 different locations. You can assemble your Jekyll site with various configurations, variants, and more. Jekyll actually does all of this quite well. Just specify a different config file for each unique build.

FEATURES	SUPPORTED	NOTES
Skinnability	Yes	You can skin your Jekyll site to look identical to pretty much any other site online. If you have a UX team, they can really skin and design the site using all the tools familiar to the modern designer -- JavaScript, HTML5, CSS, jQuery, and more. Jekyll is built on the modern web development stack rather than the XML stack (XSLT, XPath, XQuery).
Support	Yes	The community for your Jekyll site isn't so much other tech writers (as is the case with DITA) but rather the wider web development community. <a href="http://talk.jekyllrb.com">Jekyll Talk</a> ( <a href="http://talk.jekyllrb.com">http://talk.jekyllrb.com</a> ) is a great resource. So is Stack Overflow.
Blogging features	No	This theme just uses pages, not posts. I may integrate in post features in the future, but the theme really wasn't designed with posts in mind. If you want a post version of the site, you can clone my <a href="https://github.com/tomjohnson1492/tomjohnson1492.github.io">blog theme</a> ( <a href="https://github.com/tomjohnson1492/tomjohnson1492.github.io">https://github.com/tomjohnson1492/tomjohnson1492.github.io</a> ), which is highly similar in that it's based on Bootstrap, but it uses posts to drive most of the features. I wanted to keep the project files simple.
CMS interface	No	Unlike with WordPress, you don't log into an interface and navigate to your files. You work with text files and preview the site dynamically in your browser. Don't worry -- this is part of the simplicity that makes Jekyll awesome. I recommend using WebStorm as your text editor.

FEATURES	SUPPORTED	NOTES
WYSIWYG interface	No, but ...	As noted in the previous point, I use WebStorm to author content, because I like working in text file formats. But you can use any Markdown editor you want (e.g., Lightpaper for Mac, Marked) to author your content.
Versioning	Yes, but...	Jekyll doesn't version your files. You upload your files to a version control system such as Git. Your files are versioned there.
PC platform	Yes, but ...	Jekyll isn't officially supported on Windows, and since I'm on a Mac, I haven't tried using Jekyll on Windows. See this <a href="http://jekyllrb.com/docs/windows/">page in Jekyllrb help</a> (http://jekyllrb.com/docs/windows/) for details about installing and running Jekyll on a Windows machine. A couple of Windows users who have contacted me have been unsuccessful in installing Jekyll on Windows, so beware. In the configuration files, use <code>rouge</code> instead of <code>pygments</code> (which is Python-based) to avoid conflicts.
jQuery plugins	Yes	You can use any jQuery plugins you and other JavaScript, CMS, or templating tools. However, note that if you use Ruby plugins, you can't directly host the source files on Github Pages because Github Pages doesn't allow Ruby plugins. Instead, you can just push your output to any web server. If you're not planning to use Github Pages, there are no restrictions on any plugins of any sort. Jekyll makes it super easy to integrate every kind of plugin imaginable. This theme doesn't actually use any plugins, so you can publish on Github if you want.

FEATURES	SUPPORTED	NOTES
Bootstrap integration	Yes	This theme is built on <a href="http://getbootstrap.com/">Bootstrap</a> (http://getbootstrap.com/). If you don't know what Bootstrap is, basically this means there are hundreds of pre-built components, styles, and other elements that you can simply drop into your site. For example, the responsive quality of the site comes about from the Bootstrap code base.
Fast-loading pages	Yes	This is one of the Jekyll's strengths. Because the files are static, they loading extremely fast, approximately 0.5 seconds per page. You can't beat this for performance. (A typically database-driven site like WordPress averages about 2.5 + seconds loading time per page.) Because the pages are all static, it means they are also extremely secure. You won't get hacked like you might with a WordPress site.
Relative links	Yes	This theme is built entirely with relative links, which means you can easily move the files from one folder to the next and it will still display. You don't need to view the site on a web server either -- you can view it locally just clicking the files. This relative link structure facilitates scenarios where you need to archive versions of content or move the files from one directory (a test directory) to another (such as a production directory).
Themes	Yes	You can have different themes for different outputs. If you know CSS, theming both the web and print outputs is pretty easy.

FEATURES	SUPPORTED	NOTES
Open source	Yes	This theme is entirely open source. Every piece of code is open, viewable, and editable. Note that this openness comes at a price — it's easy to make changes that break the theme or otherwise cause errors.

# Pages

## Where to author content

Use a text editor such as Sublime Text, WebStorm, IntelliJ, or Atom to create pages.

My preference is IntelliJ/WebStorm, since it will treat all files in your project as belonging to a project. This allows you to easily search for instances of keywords, do find-and-replace operations, or do other actions that apply across the whole project.

## Page names and excluding files from outputs

By default, everything in your project is included in the output. This is problematic when you're single sourcing and need to exclude some files from an output.

Here's the approach I've taken. Put all files in your root directory, but put the project name first and then any special conditions. For example, `doc_writers_intro.md`.

In your configuration file, you can exclude all files that don't belong to that project by using wildcards such as the following:

exclude:

- `doc_*`
- `doc_writers_*`

These wildcards will exclude every match after the `*`.

## Frontmatter

Make sure each page has frontmatter at the top like this:

```
---
title: Your page title
tags: [deployment]
keywords: overview, going live, high-level
summary: "Deploying DeviceInsight requires the following steps."
---
```

Frontmatter is always formatted with three hyphens at the top and bottom. Your frontmatter must have a `title` value. All the other values are optional.

The following table describes each of the frontmatter that you can use with this theme:

FRONTMATTER	REQUIRED?	DESCRIPTION
<b>title</b>	Required	The title for the page
<b>tags</b>	Optional	Tags for the page. Make all tags single words, with hyphens if needed. Separate them with commas. Enclose the whole list within brackets. Also, note that tags must be added to <code>_data/tags_doc.yml</code> to be allowed entrance into the page.
<b>keywords</b>	Optional	Synonyms and other keywords for the page. This information gets stuffed into the page's metadata to increase SEO. The user won't see the keywords, but if you search for one of the keywords, it will be picked up by the search engine.
<b>last_updated</b>	Optional	The date the page was last updated. This information could be helpful for readers trying to evaluate how current and authoritative information is. If included, the <code>last_updated</code> date appears in the footer of the page.

FRONTMATTER	REQUIRED?	DESCRIPTION
<b>summary</b>	Optional	A 1-2 word sentence summarizing the content on the page. This gets formatted into the summary section in the page layout. Adding summaries is a key way to make your content more scannable by users (check out <a href="http://www.nngroup.com/articles/corporate-blogs-front-page-structure/">Jakob Nielsen's site</a> ( <a href="http://www.nngroup.com/articles/corporate-blogs-front-page-structure/">http://www.nngroup.com/articles/corporate-blogs-front-page-structure/</a> ) for a great example of page summaries.)
<b>datatable</b>	Optional	Boolean. If you add <code>true</code> , then scripts for the <a href="https://www.datatables.net/">jQuery datatables plugin</a> ( <a href="https://www.datatables.net/">https://www.datatables.net/</a> ) get included on the page.
<b>video</b>	Optional	If you add <code>true</code> , then scripts for <a href="http://www.videojs.com/">Video JS: The HTML5 video player</a> ( <a href="http://www.videojs.com/">http://www.videojs.com/</a> ) get included on the page.

✓ **Tip:** You can see the scripts that conditionally appear by looking in the `_layouts/default.html` page. Note that these scripts are served via a CDN, so the user must be online for the scripts to work. However, if the user isn't online, the tables and video still appear. In other words, they degrade gracefully.

## What about permalinks?

What about permalinks? This theme isn't build using permalinks because it makes linking and directory structures problematic. Permalinks generate an index file inside a folder for each file in the output. This makes it so links (to other pages as well as to resources such as styles and scripts) need to include `../` depending upon where the other assets are located. But for any pages outside folders, such as the `index.html` page, you wouldn't use the `../` structure.

Basically, permalinks complicate the linking structure significantly, so they aren't used here. As a result, page URLs have an .html extension. If you include `permalink: something` in your frontmatter, your link to the page will break (actually, you could still go to `sample` instead of `sample.html`, but none of the styles or scripts will be correctly referenced).

## Colons in page titles

If you want to use a colon in your page title, you must enclose the title's value in quotation marks.

## Saving pages as drafts

If you add `published: false` in the frontmatter, your page won't be published. You can also move draft pages into the `_drafts` folder to exclude them from the build.

✓ **Tip:** You can create file templates in WebStorm that have all your common frontmatter, such as all possible tags, prepopulated. See [WebStorm Text Editor](#) (page 31) for details.

## Markdown or HTML format

Pages can be either Markdown or HTML format (specified through either an .md or .html file extension).

If you use Markdown, you can also include HTML formatting where needed. But not vice versa — if you use HTML (as your file extension), you can't insert Markdown content.

Also, if you use HTML inside a Markdown file, you cannot use Markdown inside of HTML. But you can use HTML inside of Markdown.

For your Markdown files, note that a space or two indent will set text off as code or blocks, so avoid spacing indents unless intentional.

## Where to save pages

Store all your pages inside the root directory. This is because the site is built with relative links. There aren't any permalinks or baseurls used in the link architecture. This relative link nature of the site allows you to easily move it from one folder to another without invalidating the links.

If this approach creates too many files in one long list, consider grouping files into Favorites sections using WebStorms Add to Favorites feature.

## Github-flavored Markdown

You can use standard Multimarkdown syntax for tables. You can also use fenced code blocks. The configuration file shows the Markdown processor and extensions:

```
markdown: redcarpet

redcarpet:
  extensions: ["no_intra_emphasis", "fenced_code_blocks", "tables", "with_toc_data"]
```

These extensions mean the following:

REDCARPET EXTENSION	DESCRIPTION
no_intra_emphasis	don't italicize words with underscores
fenced_code_blocks	allow three backticks before and after code blocks instead of <code>&lt;pre&gt;</code> tags
tables	allow table syntax
with_toc_data	add ID tags to headings automatically

You can also add "autolink" as an option if you want links such as <http://google.com> to automatically be converted into links.

**Note:** Make sure you leave the `with_toc_data` option included. This auto-creates an ID for each Markdown-formatted heading, which then gets injected into the mini-TOC. Without this auto-creation of IDs, the mini-TOC won't include the heading. If you ever use HTML formatting for headings, you need to manually add an ID attribute to the heading in order for the heading to appear in the mini-TOC.

## Automatic mini-TOCs

By default, a mini-TOC appears at the top of your pages and posts. If you don't want this, you can remove the `{% include toc.html %}` from the `layouts/page.html` file.

If you don't want the TOC to appear for a specific page, add `toc: false` in the frontmatter of the page.

The mini-TOC requires you to use the `##` syntax for headings. If you use `<h2>` elements, then you must add an ID attribute for the h2 element in order for it to appear in the mini-TOC.

## Specify a particular page layout

The configuration file sets the default layout for pages as the "page" layout.

You can create other layouts inside the `layouts` folder. If you create a new layout, you can specify that your page use your new layout by adding

`layout: mylayout.html` in the page's frontmatter. Whatever layout you specify in the frontmatter of a page will override the layout default set in the configuration file.

## Comments

Disqus, a commenting system, is integrated into the theme. In the configuration file, specify the Disqus code for the universal code, and Disqus will appear. If you don't add a Disqus value, the Disqus code isn't included.

## Posts

This theme isn't coded with any kind of posts logic. For example, if you wanted to add a blog to your project that leverages posts, you couldn't do this with the theme. However, you could easily take the post logic from another site and integrate it into this theme. I've just never had a strong need to integrate blog posts into documentation.

## Custom keyboard shortcuts

Some of the Jekyll syntax can be slow to create. Using a utility such as [aText](https://www.trankynam.com/atext/) (<https://www.trankynam.com/atext/>) can make creating content a lot of faster.

For example, when I type `jif`, aText replaces it with `{% if site.platform == "x" %}`. When I type `jendif`, aText replaces it with `{% endif %}`.

You get aText from the App Store on a Mac for about \$5.

There are alternatives to aText, such as Typeitforme. But aText seems to work the best. You can read more about it on [Lifehacker](http://lifehacker.com/5843903/the-best-text-expansion-app-for-mac) (<http://lifehacker.com/5843903/the-best-text-expansion-app-for-mac>).

## WebStorm Text editor

There are a variety of text editors available, but I like WebStorm the best because it groups files into projects, which makes it easy to find all instances of a text string, to do find and replace operations across the project, and more.

If you decide to use WebStorm, here are a few tips on configuring the editor.

### Remove unnecessary plugins

By default, WebStorm comes packaged with a lot more functionality than you probably need. You can lighten the editor by removing some of the plugins. Go to **WebStorm > Preferences > Plugins** and clear the check boxes of plugins you don't need.

### Add the Markdown Support plugin

Since you'll be writing in Markdown, having color coding and other support for Markdown is key. Install the Markdown Support plugin by going to **WebStorm > Preferences > Plugins** and clicking **Install JetBrains Plugin**. Search for **Markdown Support**.

### Learn a few key commands

COMMAND	SHORTCUTS
Shift + Shift	Allows you to find a file by searching for its name.
Ctrl + H	Find in whole project. (WebStorm uses the term "Find in "path".)
Edit > Find > Re-place in Path	Replace in whole project. (Unfortunately, I can't find a keyboard shortcut for this common operation.)
Right-click > Refac-tor > Safe Delete	Allows you to delete a file.
Right-click > Add to Favorites	Allows you to add files to a Favorites section, which expands below the list of files in the project pane.

## Identifying changed files

When you have the Git and Github integration, changed files appear in blue. This lets you know what needs to be committed to your repository.

## Creating file templates

Rather than insert the frontmatter by hand each time, it's much faster to simply create a Jekyll template. To create a Jekyll template in WebStorm:

1. Right-click a file in the list of project files, and select **New > Edit File Templates**.

If you don't see the Edit File Templates option, you may need to create a file template first. Go to **File > Default Settings > Editor > File and Code Templates**. Create a new file template with an md extension, and then close and restart WebStorm. Then repeat this step and you will see the File Templates option appear in the right context menu.

2. In the upper-left corner of the dialog box that appears, click the **+** button to create a new template.
3. Name it something like Jekyll page. Insert the frontmatter you want, and save it.

To use the Jekyll template, when you create a new file in your WebStorm project, you can select your Jekyll file template.

## Disable pair quotes

By default, each time you type `'`, WebStorm will pair the quote. You can disable this by going to **WebStorm > Preferences > Editor > Smartkeys**. Clear the **Insert pair quotes** check box.

## Series pages

**Summary:** You can automatically link together topics belonging to the same series. This helps users know the context within a particular process.

You create a series by looking for all pages within a tag namespace that contain certain frontmatter. Here's a demo: [Series demo](#) (page 0).

### 1. Create the series button

First create an include that contains your series button:

```
<div class="seriesContext">
  <div class="btn-group">
    <button type="button" data-toggle="dropdown" class="btn btn-primary dropdown-toggle">Series Demo <span class="caret"></span></button>
    <ol class="dropdown-menu">
      {% assign pages = site.pages | sort:"weight" %}
      {% for p in pages %}
      {% if p.series == "ACME series" %}
      {% if p.url == page.url %}
      <li class="active"> → {{p.weight}}. {{p.title}}</li>
      {% else %}
      <li>
        <a href="{{p.url}}">{{p.weight}}. {{p.title}}</a>
      </li>
      {% endif %}
      {% endif %}
      {% endfor %}
    </ol>
  </div>
</div>
```

Change "ACME series" to the name of your series.

Save this in your `_includes` folder as something like `series_acme.html`.

Note that with pages, there isn't a universal namespace created from tags or categories like there is with Jekyll posts. As a result, you have to loop through all pages. If you have a lot of pages in your site (e.g., 1,000+), then this looping will create a slow build time. If this is the case, you will need to rethink the approach to looping here.

## 2. Create the "next" include

This will be the next button at the bottom of the page:

```
<p>{% assign series_pages = site.tags.series_acme %}
  {% for p in pages %}
    {% if p.series == "ACME series" %}
      {% assign nextTopic = page.weight | plus: "0.1" %}
      {% if p.weight == nextTopic %}
        <a href="{{p.url}}"><button type="button" class="btn btn-pr
        imary">Next: {{p.weight}}  {{p.title}}</button></a>
      {% endif %}
    {% endif %}
  {% endfor %}
</p>
```

Change "acme" to the name of your series.

Save this in your `_includes` folder as `series_acme_next.html`.

## 3. Add the correct frontmatter to each of your series pages

Now add the following frontmatter to each page in the series:

```
series: "ACME series"
weight: 1.0
```

With weight, you could use 1, 2, 3, etc., but Jekyll will treat 10 as coming after 1. This is why I use 1.0 and 1.1, 1.2, etc.

If you do use whole numbers, change the `plus: "0.1"` to `plus: "1"`.

## 4. Add links to the series button and next button on each page.

On each series page, add a link to the series button at the top and a link to the next button at the bottom.

```
<!-- your frontmatter goes here -->

{% include custom/doc/series_acme.html %}

<!-- your page content goes here ... -->

{% include custom/doc/series_acme_next.html %}
```

## Changing the series drop-down color

The Bootstrap menu uses the `primary` class for styling. If you change this class in your theme, the Bootstrap menu should automatically change color as well. You can also just use another Bootstrap class in your button code. Instead of `btn-primary`, use `btn-info` or `btn-warning`. See [Labels](#) (page 62) for more Bootstrap button classes.

# Collections

## What are collections

Collections are custom content types different from pages and posts. You might create a collection if you want to treat a specific set of articles in a unique way, such as with a custom layout or listing. For more detail on collections, see [Ben Balter's explanation of collections here](http://ben.balter.com/2015/02/20/jekyll-collections/) (<http://ben.balter.com/2015/02/20/jekyll-collections/>).

## Create a collection

To create a collection, add the following in your configuration file:

```
collections:
  tooltips:
    output: true
```

In this example, "tooltips" is the name of the collection.

## Interacting with collections

You can interact with collections by using the `site.collectionname` namespace, where `collectionname` is what you've configured. In this case, if I wanted to loop through all tooltips, I would use `site.tooltips` instead of `site.pages` or `site.posts`.

See [Collections in the Jekyll documentation](http://jekyllrb.com/docs/collections/) (<http://jekyllrb.com/docs/collections/>) for more information.

## How to use collections

I haven't found a huge use for collections in normal documentation. However, I did find a use for collections in generating a tooltip file that would be used for delivering tooltips to a user interface from text files in the documentation. See [Help API and UI tooltips](#) (page 102) for details.

# Sidebar navigation

**Summary:** The sidebar and top navigation bar read their values from yml files. The navigation components are one of the most unique parts of this theme, since the navigation components are only included if they meet all of the product, audience, version, etc., values as specified in the project settings.

## Sidebar overview

To configure the sidebar, edit the values in the `_data/sidebar_doc.yml` file. Follow the example in this theme. Note that YAML spacing is picky. Each new level is two spaces indented. I usually just keep a template that shows all three levels and then copy and paste from it as needed.

## Sidebar levels

You can add three levels of nesting in the sidebar nav. For example, three levels looks like this:

```
Introduction
  -> Getting started
  -> Features
  -> Configuration
      -> Options
      -> Automation
```

You can't add more than three levels. In general, it's a best practice not to create more than three levels of navigation anyway, since it creates a paralysis of choice for the user.

If you need deeper sublevels, I recommend creating different sidebars for different pages, which is logic that I haven't coded into the theme but which could probably be added fairly easily.

## External links

If you want the URL to point to an external site, use `external_url` instead of `url` in the data file. Then just enter the full HTTP URL. When you use `external_url`, the `sidebar.html` will apply this logic:

```
{% if item.external_url %}
<li><a href="{{item.external_url}}" target="_blank">{{subcategory.title}}</a></li>
```

## How it works

The values in the `sidebar_doc.yml` file are coded to match the logic in `includes/sidebar.html`.

Each of the items in the sidebar needs to have the attributes shown here:

```
- title: Getting started
  url: /doc_getting_started.html
  audience: writers, designers
  platform: all
  product: all
  version: all
```

The audience, platform, product, and version are specified in the `includes/custom/conditions.html` file:

```
{% if site.project == "doc" %}
{% assign audience = "designers" %}
{% assign sidebar = site.data.sidebar_doc.entries %}
{% assign topnav = site.data.topnav_doc.topnav %}
{% assign topnav_dropdowns = site.data.topnav_doc.topnav_dropdo
wns %}
{% assign version = "all" %}
{% assign product = "all" %}
{% assign platform = "all" %}
{% assign link = "custom/doc/links_doc.html" %}
{% assign projectTags = site.data.tags_doc.allowed-tags %}
{% assign searchGroup = "doc" %}
{% endif %}
```

Additionally, note how some assignments are set here as well. The conditions.html file set things like `sidebar = site.data.sidebar_doc.entries`.

When the sidebar.html file runs the logic, it includes these statements:

```
{% include custom/conditions.html %}

{% for entry in sidebar %}
...

```

The assignment of the `sidebar` value through the conditions.html file means this is really what's happening:

```
{% include custom/conditions.html %}

{% for entry in site.data.sidebar_doc.entries %}

```

Since different projects will use different data files, I had to make the logic run using the standard `sidebar` variable, but change the meaning of that variable based on the project.

## Sidebar accordion

The configuration file (configs/config\_writers.yml) file includes a value ( sidebar\_accordion ) that lets you choose whether to use the accordion feature in the sidebar or not. The accordion feature collapses other sections when a section is opened, which conserves space on the screen. Put true or false for the value.

## Sidebar fixed or moving

If you scroll up, the sidebar usually remains fixed in place. This is so that users can keep the context of the table of contents in place while they move down the page.

However, if the user's viewport is really small, you don't want the TOC to remain fixed in place because expanding one section may extend past what is visible. In the js/customscripts.js file, I inserted some logic to check the viewport size.

```
$( document ).ready(function() {  
  
    //  
    var h = $(window).height();  
    console.log (h);  
    if (h > 800) {  
        $( "#mysidebar" ).attr("class", "nav affix");  
    }  
    // activate tooltips. although this is a bootstrap js function,  
    // it must be activated this way in your theme.  
    $('[data-toggle="tooltip"]').tooltip({  
        placement : 'top'  
    });  
});
```

The script says, if the height of the viewport is greater than 800px, then insert affix class, which makes the nav bar fixed as your scroll. If you have a lot of nav items, this fixed position may not work for you.

For example, if your sidebar has a lot of items and the fixed position makes it so the user can't see all the items when expanded, you may want to adjust the height. If viewing the sidebar is a problem, increase the height value from 800 to 1000 or more.

## Navgoco foundation

The sidebar uses the [Navgoco jQuery plugin](https://github.com/tefra/navgoco) (https://github.com/tefra/navgoco) as its basis. Why not use Bootstrap? Navgoco provides a few features that I couldn't find in Bootstrap:

- Navgoco sets a cookie to remember the user's position in the sidebar. If you refresh the page, the cookie allows the plugin to remember the state.
- Navgoco inserts an `active` class based on the navigation option that's open. This is essential for keeping the accordion open.
- Navgoco includes the expand and collapse features of a sidebar.

In short, the sidebar has some complex logic here. I've integrated Navgoco's features with the sidebar.html and sidebar\_doc.yml to build the sidebar. It's probably the most impressive part of this theme. (Other themes usually aren't focused on creating hierarchies of pages, but this kind of hierarchy is important in a documentation site.)

## Highlighting the active item

Here's how the highlighting of the currently viewed page works. In the sidebar.html file, you'll see this:

```
{% elsif page.url == item.url %}
  <li class="active"><a href="{{item.url | replace:
"/", ""}}">{{item.title}}</a></li>
```

The `page.url` is a universal Jekyll tag that returns the end path of the page, prepended with `/`. For example, `/sample.html`. If this `page.url` matches the `item.url` specified in the sidebar\_doc.yml file, then an `active` class gets applied.

Note that I've added a filter to the `item.url` in the sidebar.html file:

```
{{item.url | replace: "/", ""}}
```

Ideally, in the sidebar\_doc.yml file, you could just write the URL you want to go to: `sample.html` instead of `/sample.html`. However, `page.url` always returns the forward slash before the URL. In order to match the `page.url` with the `item.url`, you have to use the forward slash before `item.url` in the `doc_sidebar.yml` file.

However, if you set up your relative link as `/sample.html` instead of `sample.html`, then the browser will go to the directory root instead of any `baseurl`.

For example, if your site is deployed at `http://mydomain.com/doc/`, then going to `/sample.html` in the link will take you to `http://mydomain.com/sample.html` instead of `http://mydomain.com/doc/sample.html`.

In contrast, going to `sample.html` in the link will take you to `http://mydomain.com/doc/sample.html`. Hence the filter to remove the forward slash in the link.

That logic handles the highlighting of the active item, but in order for the sidebar to remain open, the parent level needs to also have the `active` class. To accomplish this, I inserted this script below the sidebar code in the `sidebar.html` file:

```
<script>$("li.active").parents('li').toggleClass("active");</script>
```

This script has to come *after* the sidebar code. Otherwise, if placed inside `customscripts.js`, the script runs before the sidebar code runs and the class never gets inserted.

## Top navigation

**Summary:** The top navigation provides either single links or a drop-down menu. There are some other features, such as a feedback email, custom menu, and popout link.

## Changing the top navigation

The top navigation reads from the `_data/topnav_doc.yml` file. There are two *separate* sections:

- `topnav``
- `topnav_dropdowns``

Items in the `topnav`` section are rendered as single links. In contrast, items in the `topnav_dropdowns`` section are rendered as a drop-down menu.

## The Feedback email

If you click the Feedback link, it inserts the link to the current page along with a subject header and body. The `topnav.html` file contains an include to `feedback.html`. This file contains the JavaScript that gets the current page URL and inserts it into the message body.

You configure the email in the configuration file with this property:  
`site.feedback_email`.`

## Custom Menu

It's common to publish multiple sites. If you want to link them together, you could simply list links to the other doc sites in a drop-down menu configured in the `topnav_dropdowns`` section in the `topnav_doc.yml` file. However, suppose you want to do something more fancy.

Included in the `topnav.html` file is an include to `/doc/customMenu.html`. The code there is as follows:

```
<li ><a href=" ../doc_writers/doc_top_navigation.html">Write  
r docs</a></li>  
  
<li class="dropdownActive"><a href=" ../doc_designers/doc_top_n  
avigation.html">Designer docs</a></li>
```

The current doc site is highlighted. If you select another doc site, the site switches to that doc site and goes to the same page on that doc site. This way, if you have a task such as "Configuring the license" in several different programming languages, users can switch to other programming languages to see the same page.

You need to have both the designers and writers sites deployed on a web server to see this in action. Go to the following link: [idratherbetellingstories.com/documentation-theme-jekyll/doc\\_designers/](http://idratherbetellingstories.com/documentation-theme-jekyll/doc_designers/) ([http://idratherbetellingstories.com/documentation-theme-jekyll/doc\\_designers/](http://idratherbetellingstories.com/documentation-theme-jekyll/doc_designers/)).

Browse to any page in the navigation. Then go to the **Custom Menu** and select the **Writers** site. You'll go to the exact same page but on the Writers site.

If your current page doesn't have an equivalent in your other outputs, then put this in the frontmatter of the page:

```
switch: false
```

This Custom Menu may not be something you want, and if so, just remove the include from the sidebar.html file. But if you're outputting multiple sites, it may be something valuable.

## Pop-out link

The top navigation bar also has an include to frameescape.html. If the site is embedded inside a frame, a link on the top navigation bar appears that says Pop-out, and it will open the site in a new window.

In most cases, you'll want to simply remove this include. I added this because some of my doc sites are delivered through a Salesforce Community and are embedded inside another page in a small area. This pop-out link is a way of liberating the site from these embedded page scenarios. If your site isn't embedded in an iframe, the Pop-out link is removed.

# Tags

## Add a tag to a page

You can add tags to pages by adding `tags` in the frontmatter with values inside brackets, like this:

```
---
title: 2.0 Release Notes
permalink: /release_notes_2_0/
tags: [formatting, single-sourcing]
---
```

## Tags overview

**Note:** With posts, tags have a namespace that you can access with `posts.tags.tagname`, where `tagname` is the name of the tag. You can then list all posts in that tag namespace. But pages don't off this same tag namespace, so you could actually use another key instead of `tags`. Nevertheless, I'm using the same `tags` name here.

To prevent tags from getting out of control and inconsistent, first make sure the tag appears in the `\date/tags_doc.yml` file. If it's not there, the tag you add to a page won't be read. I added this check just to make sure I'm using the same tags consistently and not adding new tags that don't have tag archive pages.

**Note:** Unlike with WordPress, you have to build out the functionality for tags so that clicking a tag name shows you all pages with that tag. Tags in Jekyll are much more manual.

Additionally, you must create a tag archive page similar to the other pages named `doc_tag-{tagname}.html` folder. This theme doesn't auto-create tag archive pages.

For simplicity, make all your tags single words (connect them with hyphens if necessary).

## Setting up tags

Tags have a few components.

1. First make sure you configure a few details in the conditions.html file. In particular, see this setting:

```
{% assign projectTags = site.data.tags_doc.allowed-tags %}
```

The tags\_doc name must correspond with how you label your tags file. Here, "doc" should be your project name.

2. In the \_data file, add a yml file similar to tags\_doc.yml. The YAML file lists the tags that are allowed:

```
allowed-tags:
  - getting-started
  - overview
  - formatting
  - publishing
  - single-sourcing
  - special-layouts
  - content types
```

3. Create a tag archive file for each tag in your tags\_doc.yml list. Name the file like this: doc\_tag-getting-started.html, where doc is your project name. (Again, tags with multiple words need hyphens in them.)

Each tag archive file needs only this:

```
---
title: "Getting Started Pages"
tagName: getting-started
---
{% include taglogic.html %}
```

```
<div class="alert alert-info" role="alert"><i class="fa fa-info-circle"></i> <b>Note: </b>In the \_includes folder, there's a taglogic.html file. This file (included in each tag archive file) has common logic for getting the tags and listing out the pages containing the tag in a table with summaries or truncated excerpts. You don't have to do anything with the file &mdash; just leave it there because the tag archive pages reference it.</div>
```

4. Adjust button color or tag placement as desired.

By default, the `_layouts/page.html` file will look for any tags on a page and insert them at the bottom of the page using this code:

```
<div class="tags">
  {% if page.tags != null %}
  <b>Tags: </b>
  {% include custom/conditions.html %}
  {% for tag in page.tags %}
  {% if projectTags contains tag %}
  <a href="{{site.project}}_tag-{{tag}}.html"><button
type="button" class="btn btn-info navbar-btn cursorNormal">{{page.tagName}}{{tag}}</button></a>{% unless forloop.last %}{% endunless%}
  {% endif %}
  {% endfor %}
  {% endif %}
</div>
```

Here's an example of what the code does:

### Tags:

navigation (page 0)

Because this code appears on the `_layouts/page.html` file by default, you don't need to do anything. However, if you want to alter the placement or change the button color, you can do so.

You can change the button color by changing the class on the button from `btn-info` to one of the other button classes bootstrap provides. See [Labels](#) (page 62) for more options on button class names.

## Retrieving pages for a specific tag

If you want to retrieve pages outside of a particular doc\_tag-archive page, you could use this code:

```
Getting started pages:
<ul>
  {% for page in site.pages %}
    {% for tag in page.tags %}
      {% if tag == "getting-started" %}
        <li><a href="{{page.url}}">{{page.title}}</a></li>
      {% endif %}
    {% endfor %}
  {% endfor %}
</ul>
```

Here's how that code renders:

Getting started pages:

- [Getting started with this theme](#) (page 0)
- [Pages](#) (page 0)
- [Support](#) (page 0)
- [Supported features](#) (page 0)
- [Theme customization](#) (page 0)
- [Introduction](#) (page 0)

If you want to sort the pages alphabetically, you have to apply a `sort` filter:

Getting started pages:

```
<ul>
{% assign sorted_pages = (site.pages | sort: 'title') %}
{% for page in sorted_pages %}
{% for tag in page.tags %}
{% if tag == "getting-started" %}
<li><a href="{{page.url}}">{{page.title}}</a></li>
{% endif %}
{% endfor %}
{% endfor %}
</ul>
```

Here's how that code renders:

Getting started pages:

- [Getting started with this theme](#) (page 0)
- [Introduction](#) (page 0)
- [Pages](#) (page 0)
- [Support](#) (page 0)
- [Supported features](#) (page 0)
- [Theme customization](#) (page 0)

## Efficiency

Although the tag approach here uses `for` loops, these are somewhat inefficient on a large site. Most of my tech doc projects don't have hundreds of pages (like my blog does). If your project does have hundreds of pages, this `for` loop approach with tags is going to slow down your build times.

Without the ability to access pages inside a universal namespace with the `page` type, there aren't many workarounds here for faster looping.

With posts (instead of pages), since you can access just the posts inside `posts.tag.tagname`, you can be a lot more efficient with the looping.

Still, if the build times are getting long (e.g., 1 or 2 minutes per build), look into reducing the number of `for` loops on your site.

## Empty tags?

If your page shows "tags:" at the bottom without any value, it could mean a couple of things:

- You're using a tag that isn't specified in your allowed tags list in your `doc_tags.yml` file.
- You have an empty `tags: []` property in your frontmatter.

If you don't want tags to appear at all on your page, remove the `tags` property from your frontmatter.

## Remembering the right tags

Since you may have many tags and find it difficult to remember what tags are allowed, I recommend creating a template that prepopulates all your frontmatter with all possible tags. Then just remove the tags that don't apply.

See [WebStorm Text Editor](#) (page 31) for tips on creating file templates in WebStorm.

## Tooltips

**Summary:** You can add tooltips to your content. These tooltips work well for glossary definitions.

Because this theme is built on Bootstrap, you can simply use a specific attribute on an element to insert a tooltip.

Suppose you have a glossary.yml file inside your `_data` folder. You could pull in that glossary definition like this:

```
<a href="#" data-toggle="tooltip" data-original-title="{{site.data.glossary.jekyll_platform}}">Jekyll</a> is my favorite tool for building websites.</a>
```

This renders to the following:

*Jekyll* is my favorite tool for building websites.

## Alerts

Alerts are little warnings, info, or other messages that you have called out in special formatting. In order to use these alerts or callouts, put this include at the top of your page, just below your frontmatter:

```
{% include linkrefs.html %}
```

Then insert any an alert or callout as described in the following sections.

## Alerts

You can insert an alert by using any of the following code.

ALERT	CODE
note	{{note}} your note {{end}}
tip	{{tip}} your tip {{end}}
warning	{{warning}} your warning {{end}}
important	{{important}} your important info {{end}}

The following demonstrate the formatting associated with each alert.

**✓ Tip:** Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book.

**ⓘ Note:** Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book.

**⚠ Important:** Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book.

**⚠ Warning:** Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book.

## Callouts

In contrast to the alerts, the callouts don't have a pre-coded bold-formatted preface such as note or tip. You just add one (if desired) in the callout text itself.

CALLOUT	CODE
callout_default	{{callout_default}} your callout_default content {{end}}
callout_primary	{{callout_primary}} your callout_primary content {{end}}
callout_success	{{callout_success}} your callout_success content {{end}}
callout_primary	{{callout_primary}} your callout_primary content {{end}}
callout_warning	{{callout_warning}} your callout_warning content {{end}}
callout_info	{{callout_info}} your callout_info content {{end}}

The following demonstrate the formatting for each callout.

**callout\_danger:** Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book.

**callout\_default:** Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard

dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book.

**calloutprimary:** Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book.

**calloutsuccess:** Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book.

**calloutinfo:** Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book.

**calloutwarning:** Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book.

## Blast a warning to users

If you want to blast a warning to users on every page, add the alert or callout to the layouts/page.html page right below the frontmatter. Every page using the page layout (all, by default) will show this message.

## Using Markdown inside of notes

You can't use Markdown formatting inside notes.

## Icons

The theme has two font icon sets integrated: Font Awesome and Glyphicons Halflings. The latter is part of Bootstrap, while the former is independent. Font icons allow you to insert icons drawn as vectors from a CDN (so you don't have any local images on your own site).

## See Font Awesome icons available

Go to the [Font Awesome library](http://fontawesome.github.io/Font-Awesome/icons/) (<http://fontawesome.github.io/Font-Awesome/icons/>) to see the available icons.

The Font Awesome icons allow you to adjust their size by simply adding `fa-2x`, `fa-3x` and so forth as a class to the icon to adjust their size to two times or three times the original size. As vector icons, they scale crisply at any size.

Here's an example of how to scale up a camera icon:

```
<i class="fa fa-camera-retro"></i> normal size (1x)  
<i class="fa fa-camera-retro fa-lg"></i> fa-lg  
<i class="fa fa-camera-retro fa-2x"></i> fa-2x  
<i class="fa fa-camera-retro fa-3x"></i> fa-3x  
<i class="fa fa-camera-retro fa-4x"></i> fa-4x  
<i class="fa fa-camera-retro fa-5x"></i> fa-5x
```


Here's what they render to:



With Font Awesome, you always use the `i` tag with the appropriate class. You also implement `fa` as a base class first. You can use font awesome icons inside other elements. Here I'm using a Font Awesome class inside a Bootstrap alert:

```
<div class="alert alert-danger" role="alert"><i class="fa fa-exclamation-circle"></i> <b>Warning: </b>This is a special warning message.
```

Here's the result:

 This is a special warning message.


The notes, tips, warnings, etc., are pre-coded with Font Awesome and stored in the linkrefs.html file in `capture` tags. That file includes the following:

```
{% capture tip %}<div class="alert alert-success" role="alert"><i class="fa fa-check-square-o"></i> <b>Tip: </b>{% endcapture %}
{% capture note %}<div class="alert alert-info" role="alert"><i class="fa fa-info-circle"></i> <b>Note: </b>{% endcapture %}
{% capture important %}<div class="alert alert-warning" role="alert"><i class="fa fa-warning"></i> <b>Important: </b>{% endcapture %}
{% capture warning %}<div class="alert alert-danger" role="alert"><i class="fa fa-exclamation-circle"></i> <b>Warning: </b>{% endcapture %}
{% capture end %}</div>{% endcapture %}
```


This means you can insert a tip, note, warning, or important alert simply by using these tags:

```
{{note}} Add your note here. {{end}}
```

Here's the result:

 **Note:** Add your note here.

 **Tip:** Here's my tip.

 **Important:** This information is very important.

 **Warning:** If you overlook this, you may die.


The color scheme is the default colors from Bootstrap. You can modify the icons or colors as needed.

## Creating your own combinations

You can innovate with your own combinations. Here's a similar approach with a file download icon:

```
<div class="alert alert-success" role="alert"><i class="fa fa-download fa-lg"></i> This is a special tip about some file to do  
wnload....</div>
```

And the result:

 This is a special tip about some file to download....

Grab the right class name from the [Font Awesome library](http://fontawesome.github.io/Font-Awesome/icons/) (<http://fontawesome.github.io/Font-Awesome/icons/>) and then implement it by following the pattern shown previously.

If you want to make your fonts even larger than the 5x style, add a custom style to your stylesheet like this:

```
.fa-10x{font-size:1700%;}
```

Then any element with the attribute `fa-10x` will be enlarged 1700%.

## Glyphicon icons available

Glyphicons work similarly to Font Awesome. Go to the [Glyphicons library](http://getbootstrap.com/components/#glyphicons) (<http://getbootstrap.com/components/#glyphicons>) to see the icons available.

Although the Glyphicon Halflings library doesn't provide the scalable classes like Font Awesome, there's a [StackOverflow trick](http://stackoverflow.com/questions/24960201/how-do-i-make-glyphicons-bigger-change-size) (<http://stackoverflow.com/questions/24960201/how-do-i-make-glyphicons-bigger-change-size>) to make the icons behave in a similar way. This theme's stylesheet (`customstyles.css`) includes the following to the stylesheet:

```
.gi-2x{font-size: 2em;}  
.gi-3x{font-size: 3em;}  
.gi-4x{font-size: 4em;}  
.gi-5x{font-size: 5em;}
```

Now you just add `gi-5x` or whatever to change the size of the font icon:

```
<span class="glyphicon glyphicon-globe gi-5x"></span>
```

And here's the result:



Glyphicons use the `span` element instead of `i` to attach their classes.

Here's another example:

```
<span class="glyphicon glyphicon-download"></span>
```



And magnified:

```
<span class="glyphicon glyphicon-download gi-3x"></span>
```



You can also put glyphicons inside other elements:

```
<div class="alert alert-danger" role="alert">  
  <span class="glyphicon glyphicon-exclamation-sign" aria-hidden="true"></span>  
  <b>Error:</b> Enter a valid email address  
</div>
```

**❗ Error:** Enter a valid email address

## Callouts

The previously shown alerts might be fine for short messages, but with longer notes, the solid color takes up a bit of space. In this theme, you also have the option of using callouts, which are pretty common in Bootstrap's documentation but surprisingly not offered as an explicit element. Their styles have been copied into this theme, in a way similar to the alerts:

```
<div class="bs-callout bs-callout-info">
```

This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. </div>

**❗** This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message. This is a special info message.

And here's the shortcode:

```
{{callout_info}}<div class="bs-callout bs-callout-info">{{end}}
```

You can use any of the following:

```
{{callout_danger}}  
{{callout_default}}  
{{callout_primary}}  
{{callout_success}}  
{{callout_info}}  
{{callout_warning}}
```

Callouts are explained in a bit more detail here: [Alerts](#) (page 52).

## Images

You embed an image the same way you embed other files or assets: you put the file into a folder, and then link to that file.

Put images inside the `images` folder in your root directory. You can create subdirectories inside this directory. Although you could use Markdown syntax for images, the HTML syntax is probably easier:

```

```

And the result:



Here's the same Markdown syntax:

```
![My sample page](images/jekyll.png)
```

And the result:




## SVG Images

You can also embed SVG graphics. If you use SVG, you need to use the HTML syntax so that you can define a width/container for the graphic. Here's a sample embed:

```

```

Here's the result:

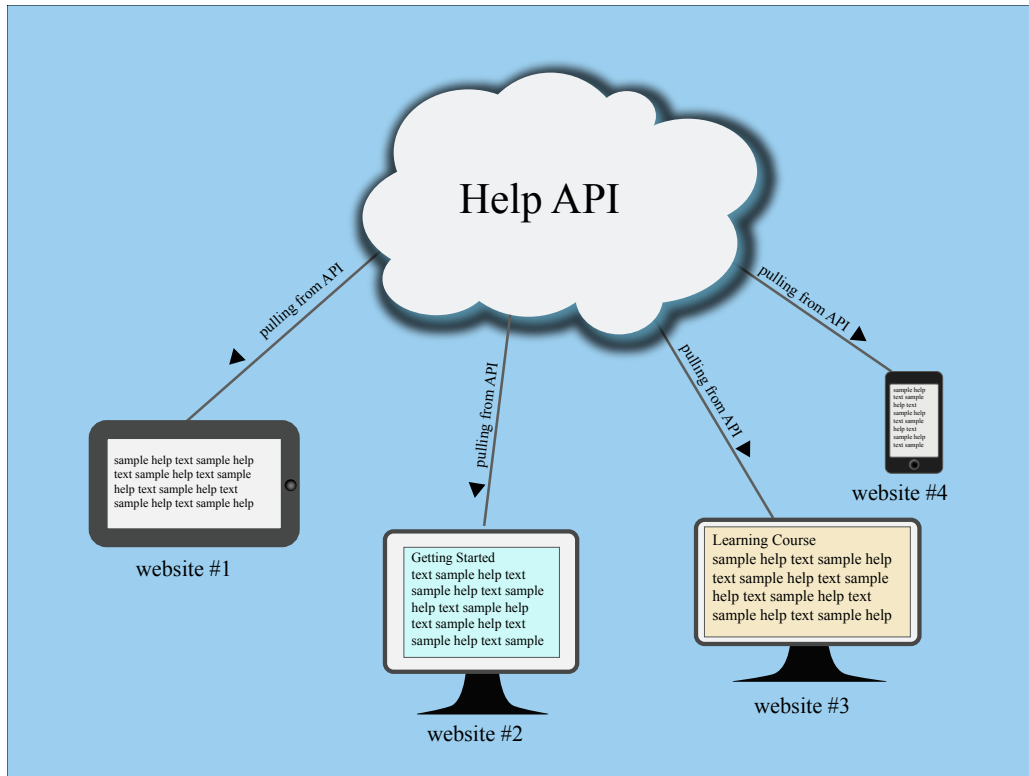

SVG images will expand to the size of their artboard, so you can either set the artboard the right size when you create the graphic in Illustrator, or you can set an inline style that confines the size to a certain width as shown in the code above.

## Labels

These labels might come in handy for labeling things, such as POST, DELETE, UPDATE methods for endpoints. You can use any classes from Bootstrap in your content.

```
<span class="label label-default">Default</span>  
<span class="label label-primary">Primary</span>  
<span class="label label-success">Success</span>  
<span class="label label-info">Info</span>  
<span class="label label-warning">Warning</span>  
<span class="label label-danger">Danger</span>
```

**Default** **Primary** **Success** **Info** **Warning** **Danger**

You can have a label appear within a heading simply by including the span tag in the heading. However, you can't mix Markdown syntax with HTML, so you'd have to hard-code the heading ID for the auto-TOC to work.

# Links

## Link strategy

One of the more difficult parts of a documentation site is keeping all the internal links accurate and valid. Although there are many ways to create links, I'll just describe what I've found to work well.

## Create an external link

When linking to an external site, use Markdown formatting:

```
[Google](http://google.com)
```

If you need to use HTML, use the normal syntax:

```
<a href="http://google.com">Google</a>
```

## Linking to internal pages

When linking to internal pages, you could use this same syntax:

```
[Sample](sample.html)
```

OR

```
<a href="sample.html">Sample</a>
```

However, what happens when you change the page's title or link? Jekyll doesn't automatically pull in the page's title when you create links.

In my experience, coding links like this results in a lot of broken links.

## Managed links

For internal links, I've found that it's a best practice to store the link in an internal file so that I can easily update all references to the link.

In this theme, the `_includes` folder contains a `links_doc.html` file where the capture tags are stored. For each link, I create the follow pair of capture tags:

```
{% capture sample %}<a href="sample.html">Sample</a>{% endcapture %}  
{% capture sample_i %}<a href="sample.html">{% endcapture %}
```

The `linksref.html` file includes the `links_doc.html`, so when you add `{% include linksref.html %}` at the top of a page, it includes all of the link variables captured here.

To insert a link to sample, do this:

```
{{sample}}
```

If you want to insert the link with custom anchor text, use this:

```
See the {{sample_i}}sample page here{{end_i}}.
```

Make sure that the `links_doc.html` file also includes this capture at least once:

```
{% capture end_i %}</a>{% endcapture %}
```

Otherwise, your link won't close.

## Relative link paths

The site is coded with relative links. There aren't any permalinks, urls, or baseurls. The folder structure you see in the project directory is the same folder directory that gets built in the site output.

Author all pages in your root directory. This greatly simplifies linking. However, when you're linking to images, files, or other content, you can put them in subfolders.

For example, to link to a file stored in `files/doc/myguide.pdf`, you would use `"files/doc/myguide.pdf"` as the link.

Why not put pages into subfolders? If you put a page into a subfolder, then links to the stylesheets, JavaScript, and other sources will fail. On those sub-folder pages, you'd need to use `../` to move up a level in the directory. But if you have some pages in some folders, others in sub-sub-folders, and others in the root, trying to guess which files should contain `../` or `../..` or nothing at all and which shouldn't will be a nightmare.

Jekyll gets around some of this link path variation by using `baseurl` and including code that prepends the `baseurl` before a link. This converts the links into absolute rather than relative links.

With absolute links, the site only displays at the `baseurl` you configured. This is problematic for tech docs because you usually need to move files around from one folder to another based on versions you're archiving or when you're moving your documentation from draft to testing to production folders.

## Limitations with links

One of the shortcomings in this theme is that your `links_doc.html` file and your `sidebar.yml` file aren't generated from the same source. If you change a link title, you have to change it in both of these locations.

Another limitation is that a link to the page never gets the title of the page automatically.

If you have solutions for either of these issues, please let me know.

# NavTabs

**Summary:** Navtabs provide a tabbable navigation directly in your content. Navtabs are helpful for showing code samples for different programming languages.

## Common uses

Navtabs are particularly useful for scenarios where you want to show a variety of options, such as code samples for Java, .NET, or PHP, on the same page.

While you could resort to single-source publishing to provide different outputs for each unique programming language or role, you could also use navtabs to allow users to select the content you want.

Navtabs are better for SEO since you avoid duplicate content and drive users to the same page.

## Navtabs demo

The following is a demo of a navtab. Refresh your page to see the tab you selected remain active.

[Profile \(page 66\)](#) [About \(page 0\)](#) [Match \(page 0\)](#)

---

## Profile

Praesent sit amet fermentum leo. Aliquam feugiat, nibh in u ltrices mattis, felis ipsum venenatis metus, vel vehicula libero mauris a enim. Sed placerat est ac lectus vestibulum tempor. Quisque ut condimentum massa. Proin venenatis leo id urna cursus blandit. Vivamus sit amet hendrerit metus.

## Code

Here's the code for the above (with the filler text abbreviated):

```
<ul id="profileTabs" class="nav nav-tabs">
  <li class="active"><a href="#profile" data-toggle="tab">Pro
file</a></li>
  <li><a href="#about" data-toggle="tab">About</a></li>
  <li><a href="#match" data-toggle="tab">Match</a></li>
</ul>
<div class="tab-content">
<div role="tabpanel" class="tab-pane active" id="profile">
  <h2>Profile</h2>
<p>Praesent sit amet fermentum leo....</p>
</div>

<div role="tabpanel" class="tab-pane" id="about">
  <h2>About</h2>
  <p>Lorem ipsum ...</p></div>

<div role="tabpanel" class="tab-pane" id="match">
  <h2>Match</h2>
  <p>Vel vehicula ....</p>
</div>
</div>
```

## Design constraints

Bootstrap automatically clears any floats after the navtab. Make sure you aren't trying to float any element to the right of your navtabs, or there will be some awkward space in your layout.

## Appearance in the mini-TOC

If you put a heading in the navtab content, that heading will appear in the mini-TOC as long as the heading tag has an ID. If you don't want the headings for each navtab section to appear in the mini-TOC, omit the ID attribute from the heading tag. Without this ID attribute in the heading, the mini-TOC won't insert the heading title into the mini-TOC.

## Must use HTML

You must use HTML within the navtab content because each navtab section is surrounded with HTML, and you can't use Markdown inside of HTML.

## Match up ID tags

Each tab's `href` attribute must match the `id` attribute of the tab content's `div` section. So if your tab has `href="#acme"`, then you add `acme` as the ID attribute in `<div role="tabpanel" class="tab-pane" id="acme">`.

## Set an active tab

One of the tabs needs to be set as active, depending on what tab you want to be open by default (usually the first one).

```
<div role="tabpanel" class="tab-pane active" id="acme">
```

## Sets a cookie

The navtabs are part of Bootstrap, but this theme sets a cookie to remember the last tab's state. The `js/customscripts.js` file has a long chunk of JavaScript that sets the cookie. The JavaScript comes from [this StackOverflow thread](http://stackoverflow.com/questions/10523433/how-do-i-keep-the-current-tab-active-with-twitter-bootstrap-after-a-page-reload) (<http://stackoverflow.com/questions/10523433/how-do-i-keep-the-current-tab-active-with-twitter-bootstrap-after-a-page-reload>).

By setting a cookie, if the user refreshes the page, the active tab is the tab the user last selected (rather than defaulting to the default active tab).

## Functionality to implement

One piece of functionality I'd like to implement is the ability to set site-wide nav tab options. For example, if the user always chooses PHP instead of Java in the code samples, it would be great to set this option site-wide by default. However, this functionality isn't yet coded.

## Video embeds

The theme has the [video.js](http://www.videojs.com/) (<http://www.videojs.com/>) player integrated. But the scripts only appear on a page or post if you have certain frontmatter in that page or post. If you want to embed a video in a page and use the Video JS player, add `video: true` in your frontmatter of a page or post, and then add code like this where you want the video to appear:

```
<p><video id="scenario-1" class="video-js vjs-default-skin vjs-big-play-centered" controls
  preload="auto" width="640" height="480" data-setup='{}'>
  <source src="http://idratherbetellingstories.com/podcasts/ontariochapterpresentation/ontariochapterv4.mp4" type='video/mp4'>
</video></p>
```

Here's an example:

If you want the player button in the upper-left corner (which is the default), remove the `vjs-big-play-centered` from the video class.

Here are [more details on this video player from Video JS](https://github.com/videojs/video.js/blob/stable/docs/guides/setup.md) (<https://github.com/videojs/video.js/blob/stable/docs/guides/setup.md>).

Note that if some of the js doesn't load correctly, the default fallback player is the regular HTML5 video player available via the browser. Here's an example of the built-in browser video wrapper:

Your browser does not support the video tag.

However, I don't think the built-in browser video players work very well (you can't easily scrub around the video without seeing lots of buffering and other issues). But definitely compare the two. You may find that adding the Video JS wrapper is overkill.

**⚠ Warning:** Github wasn't designed to store video content. If you have an mp3 file, don't store it in your Github directory. Instead, put it on a web host using regular FTP methods, or stream the video from a video streaming service such as Youtube or Vimeo. Also, note that Github's Large File Storage (which does handle large files) isn't compatible with Github Pages.

# Tables

## Multimarkdown Tables

You can use Multimarkdown syntax for tables. The following shows a sample:

```
Column 1 | Column 2
-----|-----
cell 1a | cell 1b
cell 2a | cell 2b
```

This renders to the following:

COLUMN 1	COLUMN 2
cell 1a	cell 1b
cell 2a	cell 2b

## jQuery datables

You also have the option of using a [jQuery datatable](https://www.datatables.net/) (<https://www.datatables.net/>), which gives you some more options. If you want to use a jQuery datatable, then add `datatable: true` in a page's frontmatter. This will load the right jQuery datatable scripts for the table on that page only (rather than loading the scripts on every page of the site.)

Also, you need to add this script to trigger the jQuery table on your page:

```
<script>
$(document).ready(function(){

    $('table.display').DataTable( {
        paging: true,
        stateSave: true,
        searching: true
    }
    );
});
</script>
```

The available options for the datatable are described in the [datatable documentation](https://www.datatables.net/manual/options) (<https://www.datatables.net/manual/options>), which is excellent.

Additionally, you must add a class of `display` to your tables. (You can change the class, but then you'll need to change the trigger above from `table.display` to whatever class you want to you. You might have different triggers with different options for different tables.)

Since Markdown doesn't allow you to add classes to tables, you'll need to use HTML for any datatables. Here's an example:

```
<table id="sampleTable" class="display">
  <thead>
    <tr>
      <th>Parameter</th>
      <th>Description</th>
      <th>Type</th>
      <th>Default Value</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <td>Parameter 1</td>
      <td>Sample description
      </td>
      <td>Sample type</td>
      <td>Sample default value</td>
    </tr>
    <tr>
      <td>Parameter 2</td>
      <td>Sample description
      </td>
      <td>Sample type</td>
      <td>Sample default value</td>
    </tr>
    <tr>
      <td>Parameter 3</td>
      <td>Sample description
      </td>
      <td>Sample type</td>
      <td>Sample default value</td>
    </tr>
    <tr>
      <td>Parameter 4</td>
      <td>Sample description
      </td>
      <td>Sample type</td>
      <td>Sample default value</td>
    </tr>
  </tbody>
</table>
```

This renders to the following:

FOOD	DESCRIPTION	CATEGORY	SAMPLE TYPE
Apples	A small, somewhat round and often red-colored, crispy fruit grown on trees.	Fruit	Fuji
Bananas	A long and curved, often-yellow, sweet and soft fruit that grows in bunches in tropical climates.	Fruit	Snow
Kiwis	A small, hairy-skinned sweet fruit with green-colored insides and seeds.	Fruit	Golden
Oranges	A spherical, orange-colored sweet fruit commonly grown in Florida and California.	Fruit	Navel

Notice a few features:

- You can keyword search the table. When you type a word, the table filters to match your word.
- You can sort the column order.
- You can page the results so that you show only a certain number of values on the first page and then require users to click next to see more entries.

Read more of the [datatable documentation](https://www.datatables.net/manual/options) (https://www.datatables.net/manual/options) to get a sense of the options you can configure. You should probably only use datatables when you have long, massive tables full of information.

**Note:** Try to keep the columns to 3 or 4 columns only. If you add 5+ columns, your table may create horizontal scrolling with the theme.

## Syntax highlighting

For syntax highlighting, use fenced code blocks optionally followed by the language syntax you want:

```
```ruby
  def foo
    puts 'foo'
  end
```
```

This looks as follows:

```
def foo
  puts 'foo'
end
```

Fenced code blocks require a blank line before and after.

If you're using an HTML file, you can also use the `highlight` command with Liquid markup:

```
{% highlight ruby %}
  def foo
    puts 'foo'
  end
{% endhighlight %}
```

It renders the same:

```
def foo
  puts 'foo'
end
```

The theme has syntax highlighting specified in the configuration file as follows:

```
highlighter: pygments
```

You can use another highlighter such as `rouge` .

The syntax highlighting is done via the `css/syntax.css` file.

## Available Pygments lexers

The keywords you must add to specify the highlighting (in the previous example, `ruby` ) are called "lexers." You can search for "pygments lexers" or go directly to [Available lexers](http://pygments.org/docs/lexers/) (<http://pygments.org/docs/lexers/>) to see what values you can use. Here are some common ones I use:

- `js`
- `html`
- `css`
- `json`
- `php`
- `java`
- `cpp`
- `dotnet`
- `xml`
- `http`

## Conditional logic

If you want to create different outputs for different audiences, you can do all of this using a combination of Jekyll's Liquid markup and values in your configuration file.

✓ **Tip:** Definitely check out [Liquid's documentation](http://docs.shopify.com/themes/liquid-documentation/basics) (<http://docs.shopify.com/themes/liquid-documentation/basics>) for more details about how to use operators and other liquid markup. The notes here are a small, somewhat superficial sample from the site.

## Where to store filtering values

You can filter content based on values that you have set either in your config file or in a file in your `_data` folder. If you set the attribute in your config file, you need to restart the Jekyll server to see the changes. If you set the value in a file in your `_data` folder, you don't need to restart the server when you make changes.

## Required conditional attributes

This theme requires you to add the following attributes in your configuration file:

- `project`
- `audience`
- `product`
- `platform`
- `version`

If you've ever used DITA, you probably recognize these attributes, since DITA has mostly the same ones. I've found that most single-sourcing projects I work on can be sliced and diced in the ways I need using these conditional attributes.

If you're not single sourcing and you find it annoying having to specify these attributes in your sidebar, you can rip out the logic from the `sidebar.html`, `topnav.html` file and any other places where `conditions.html` appears; then you wouldn't need these attributes in your configuration file.

## Conditional logic based on config file value

Here's an example of conditional logic based on a value in the configs/config\_writer.yml file. In my config\_writer.yml file, I have the following:

```
audience: writers
```

On a page in my site (it can be HTML or markdown), I can conditionalize content using the following:

```
{% if site.audience == "writers" %}
The writer audience should see this...
{% elsif site.audience == "designers" %}
The designer audience should see this ...
{% endif %}
```

This uses simple `if-elsif` logic to determine what is shown (note the spelling of `elsif`). The `else` statement handles all other conditions not handled by the `if` statements.

Here's an example of `if-else` logic inside a list:

```
To bake a casserole:

1. Gather the ingredients.
{% if site.audience == "writer" %}
2. Add in a pound of meat.
{% elsif site.audience == "designer" %}
3. Add in an extra can of beans.
{% endif %}
3. Bake in oven for 45 min.
```

You don't need the `elsif` or `else`. You could just use an `if` (but be sure to close it with `endif`).

## Or operator

You can use more advanced Liquid markup for conditional logic, such as an `or` command. See [Shopify's Liquid documentation](http://docs.shopify.com/themes/liquid-documentation/basics/operators) (<http://docs.shopify.com/themes/liquid-documentation/basics/operators>) for more details.

For example, here's an example using `or` :

```
{% if site.audience contains "vegan" or site.audience == "vegetarian" %}  
  // run this.  
{% endif %}
```

Note that you have to specify the full condition each time. You can't shorten the above logic to the following:

```
{% if site.audience contains "vegan" or "vegetarian" %}  
  // run this.  
{% endif %}
```

This won't work.

## Storing conditions in the `_data` folder

Here's an example of using conditional logic based on a value in a data file:

```
{% if site.data.options.output == "alpha" %}  
show this content...  
{% elsif site.data.options.output == "beta" %}  
show this content...  
{% else %}  
this shows if neither of the above two if conditions are met.  
{% endif %}
```

To use this, I would need to have a `_data` folder called `options` where the `output` property is stored.

I don't really use the `_data` folder as much for project options. I store them in the configuration file because I usually want different projects to use different values for the same property.

For example, maybe a file or function name is called something different for different audiences. I currently single source the same content to at least two audiences in different markets.

For the first audience, the function name might be called `generate`, but for the second audience, the same function might be called `expand`. In my content, I'd just use `{{site.function}}`. Then in the configuration file I change its value appropriately for the audience.

## Specifying the location for `_data`

You can also specify a `data_source` for your data location in your configuration file. Then you aren't limited to simply using `_data` to store your data files.

For example, suppose you have 2 projects: alpha and beta. You might store all the data files for alpha inside `data_alpha`, and all the data files for beta inside `data_beta`.

In your alpha configuration file, specify the data source like this:

```
data_source: data_alpha
```

Then create a folder called `_data_alpha`.

For your beta configuration file, specify the data source like this:

```
data_source: data_beta
```

Then create a folder called `_data_beta`.

## Conditional logic based on page namespace

You can also create conditional logic based on the page namespace. For example, create a page with front matter as follows:

```
---  
layout: page  
user_plan: full  
---
```

Now you can run logic based on the conditional property in that page's front matter:

```
{% if page.user_plan == "full" %}  
// run this code  
{% endif %}
```

## Conditions versus includes

If you have a lot of conditions in your text, it can get confusing. As a best practice, whenever you insert an `if` condition, add the `endif` at the same time. This will reduce the chances of forgetting to close the if statement. Jekyll won't build if there are problems with the liquid logic.

If your text is getting busy with a lot of conditional statements, consider putting a lot of content into includes so that you can more easily see where the conditions begin and end.

## Content reuse

You can embed content from one file inside another using includes. Put the file containing content you want to reuse (e.g., mypage.html) inside the `_includes` folder, and then use a tag like this:

```
{% include mypage.html %}
```

With content in your `_includes` folder, you don't add any frontmatter to these pages because they will be included on other pages already containing frontmatter.

Also, when you include a file, all of the file's contents get included. You can't specify that you only want a specific part of the file included. However, you can use parameters with includes. See [Jekyll's documentation](<http://stackoverflow.com/questions/21976330/passing-parameters-to-inclusion-in-liquid-templates>) for more information on that.

## Page-level variables

You can also create custom variables in your frontmatter like this:

```
---
title: Page-level variables
permalink: /page_level_variables/
thing1: Joe
thing2: Dave
---
```

You can then access the values in those custom variables using the `page` namespace, like this:

```
thing1: {{page.thing1}}
thing2: {{page.thing2}}
```

Honestly, I haven't found a tremendous use case for page-level variables, but it's nice to know they're available.

I use includes all the time. Most of the includes in the `_includes` directory are pulled into the theme layouts. For those includes that change, I put them inside `custom` and then inside a specific project folder.

# Build arguments

## How to build Jekyll sites

The normal way to build the Jekyll site is through the build command:

```
jekyll build
```

To build the site and view it in a live server so that Jekyll rebuilds that site each time you make a change, use the `serve` command:

```
jekyll serve
```

By default, the *config.yml* in the root directory will be used, Jekyll will scan the current directory for files, and the folder `'site'` will be used as the output. You can customize these build commands like this:

```
jekyll serve --config configs/config_writers.yml --destination  
/users/tjohnson/projects/documentation-theme-jekyll-builds/writ  
er
```

Here the `configs/config_writers.yml` file is used instead of `_config.yml`. The destination directory is `../doc_writers`.

## Shortcuts for the build arguments

If you don't want to enter the long Jekyll argument every time, with all your configuration details, you can create a shell script and then just run the script. This theme shows an example with the `doc_multibuild_web.sh` file in the root directory.

My preference is to add the scripts to profiles in iTerm. See [iTerm profiles](#) (page 0) for more details.

## Stop a server

When you're done with the preview server, press **Ctrl+C** to exit out of it. If you exit iTerm or Terminal without shutting down the server, the next time you build your site, or if you build multiple sites with the same port, you may get a server-already-in-use message.

You can kill the server process using these commands:

```
ps aux | grep jekyll
```

Find the PID (for example, it looks like "22298").

Then type `kill -9 22298` where "22298" is the PID.

To kill all Jekyll instances, use this:

```
kill -9 $(ps aux | grep '[j]ekyll' | awk '{print $2}')
```

I created a profile in iTerm that stores this command. Here's what the iTerm settings look like:

**General** Colors Text Window Terminal Session Keys Advanced

**Basics**

Name: Kill all Jekyll

Shortcut key: ^⌘

Tags: Example: linux, dark bg, tall window

**Command**

☒ Login shell

☐ Command:

Send text at start: kill -9 \$(ps aux | grep '[j]ekyll' | awk '{print \$2}')

**Working Directory**

☐ Home directory

☐ Reuse previous session's directory

☒ Directory: /Users/tjohnson/projects/docs

☐ Advanced Configuration [Edit...](#)

**URL Schemes**

Schemes handled: Select URL Schemes...

## Themes

You can choose a green or blue theme, or you can create your own. In the `css` folder, there are two theme files: `theme-blue.css` and `theme-green.css`. These files have the most common CSS elements extracted in their own CSS file. Just change the hex colors to the ones you want.

In the configuration file, specify the theme file you want the output to use — for example, `theme_file: theme-green.css`.

The differences between the themes is fairly minimal. The main navigation bar, sidebar, buttons, and heading colors change color. That's about it.

In a more sophisticated theming approach, you could use Sass files to generate rules based on options set in a data file, but I kept things simple here.

# Generating PDF

## Overview

This process for creating a PDF relies on Prince XML to transform the HTML content into PDF. Prince costs about \$500 per license. That might seem like a lot, but if you're creating a PDF, you're probably working for a company that sells a product, so you likely have access to some resources.

The basic approach is to generate a list of all pages that need to be added to the PDF, and then add leverage Prince to package them up into a PDF.

It may seem like the setup is somewhat cumbersome, but it doesn't take long. Once you set it up, building a pdf is just a matter of running a couple of commands.

Also, creating a PDF this way gives you a lot more control and customization capabilities than with other methods for creating PDFs. If you know CSS, you can entirely customize the output.

## Demo

You can see an example of the finished product here:

 Designers PDF Download

## 1. Set up Prince

Download and install [Prince](http://www.princexml.com/doc/installing/) (http://www.princexml.com/doc/installing/).

You can install a fully functional trial version. The only difference is that the title page will have a small Prince PDF watermark.

## 2. Create a new configuration file for each of your PDF targets

The PDF configuration file will build on the settings in the regular configuration file but will have some additional fields. Here's the configuration file for the config\_designers.yml file for this theme:

```
destination: ../doc_designers-pdf
url: "http://127.0.0.1:4002"
baseurl: "/doc_designers"
port: 4002
print: true
print_title: Jekyll Documentation Theme for Designers
print_subtitle: version 3.0
defaults:
  -
    scope:
      path: ""
      type: "pages"
    values:
      layout: "page_print"
      comments: true
      search: true
```

**Note:** Although you're creating a PDF, you must still build a web target before running Prince. Prince will pull from the HTML files and from the file-list for the TOC. Prince won't be able to find files if they simply have relative paths, such as `/sample.html`. They must have full URLs it can access — hence the `url` and `baseurl`.

Unlike the other configuration files, the PDF configuration files require a `url` and `baseurl`. This is because the Prince utility needs to access the pages in a specific place. While you could probably set up locations via absolute paths to file folders, it's easier just to provide the locations here as `url` and `baseurl`.

Also note that the default page layout is `page_print`. This layout strips out all the sections that shouldn't appear in the print PDF, such as the sidebar and top navigation bar.

Finally, note that there's a `print: true` toggle in case you want to make some of your content unique to PDF output. For example, you could add conditional logic that checks whether `site.print` is true or not. If it's true, then include information only for the PDF, and so on.

In the configuration file, customize the values for the `print_title` and `print_subtitle` that you want. These will appear on the title page of the PDF.

### 3. Make sure your `sidebar_doc.yml` file has a `titlepage.html` and `tocpage.html`

There are two template pages in the root directory that are critical to the PDF:

- titlepage.html
- tocpage.html

These pages should appear in your sidebar YML file (in this theme, sidebar\_doc.yml):

```
entries:
- title: Sidebar
  subcategories:
  - title: Frontmatter
    audience: writers, designers
    platform: all
    product: all
    version: all
    web: false
    items:
    - title: Title Page
      url: /titlepage.html
      audience: writers, designers
      platform: all
      product: all
      version: all
      web: false

    - title: Table of Contents
      url: /tocpage.html
      audience: writers, designers
      platform: all
      product: all
      version: all
      web: false
```

Leave these pages here in your sidebar. (The `web: false` property means they won't appear in your online TOC because the conditional logic of the sidebar.html checks whether `web` is equal to `false` or not before including the item in the web version of the content.)

The code in the tocpage.html is nearly identical to that of the sidebar.html page except that it includes the `site` and `baseurl` for the URLs. This is essential for Prince to create the page numbers correctly with cross references.

There's another file (in the root directory of the theme) that is critical to the PDF generation process: prince-file-list.txt. This file simply iterates through the items in your sidebar and creates a list of links. Prince will consume the list of links from prince-file-list.txt and create a running PDF that contains all of the pages listed, with appropriate cross references and styling for them all.

## 4. Customize your headers and footers

Open up the `css/printstyles.css` file and customize what you want for the headers and footers. At the very least, customize the email address that appears in the bottom left.

Exactly how the print styling works here is pretty cool. You don't need to understand the rest of the content in this section unless you want to customize your PDFs to look different from what I've configured.

This style creates a page reference for a link:

```
a[href]::after {
    content: " (page " target-counter(attr(href), page) ")"
}
```

You don't want cross references for any link, so this style specifies that the content after should be blank:

```
a[href*="mailto"]::after, a[data-toggle="tooltip"]::after, a[href].noCrossRef::after {
    content: "";
}
```

If you have a link to a file download, for example, add `noCrossRef` as a class to avoid having it say "page 0" in the cross reference.

This style specifies that after links to web resources, the URL should be inserted instead of the page number:

```
a[href^="http:"]::after, a[href^="https:"]::after {
    content: " (" attr(href) )";
}
```

This style sets your page margins:

```
@page {  
  margin: 60pt 90pt 60pt 90pt;  
  font-family: sans-serif;  
  font-style:none;  
  color: gray;  
  
}
```

To set a specific style property for a particular page, you have to name the page. This allows Prince to identify the page.

First you add frontmatter to the page that specifies the type. For the `titlepage.html`, here's the frontmatter:

```
---  
type: title  
---
```

For the `tocpage`, here's the frontmatter:

```
---  
type: frontmatter  
---
```

For the `index.html` page, we have this type tag (among others):

```
---  
type: first_page  
---
```

The `default_print.html` layout will change the class of the `body` element based on the type value in the page's frontmatter:

```
<body class="{% if page.type == "title"%}title{% elsif page.type == "frontmatter" %}frontmatter{% elsif page.type == "first_page" %}first_page{% endif %} print">
```

Now in the `css/printstyles.css` file, you can assign a page name based on a specific class:

```
body.title { page: title }
```

This means that for content inside of `body class="title"`, we can style this page in our stylesheet using `@page title`.

Here's how that title page is styled:

```
@page title {  
  @top-left {  
    content: " ";  
  }  
  @top-right {  
    content: " "  
  }  
  @bottom-right {  
    content: " ";  
  }  
  @bottom-left {  
    content: " ";  
  }  
}
```

As you can see, we don't have any header or footer content, because it's the title page.

For the `tocpage.html`, which has the `type: frontmatter`, this is specified in the stylesheet:

```
body.frontmatter { page: frontmatter }  
body.frontmatter {counter-reset: page 1}  
  
@page frontmatter {  
  @top-left {  
    content: prince-script(guideName);  
  }  
  @top-right {  
    content: prince-script(datestamp);  
  }  
  @bottom-right {  
    content: counter(page, lower-roman);  
  }  
  @bottom-left {  
    content: "youremail@domain.com"; }  
}
```

We reset the page count to 1 so that the title page doesn't start the count. Then we also add some header and footer info. The page numbers start counting in lower-roman numerals.

Finally, for the first page, we restart the counting to 1 again and this time use regular numbers.

```
body.first_page {counter-reset: page 1}

h1 { string-set: doctitle content() }

@page {
  @top-left {
    content: string(doctitle);
    font-size: 11px;
    font-style: italic;
  }
  @top-right {
    content: prince-script(datestamp);
    font-size: 11px;
  }

  @bottom-right {
    content: "Page " counter(page);
    font-size: 11px;
  }
  @bottom-left {
    content: prince-script(guideName);
    font-size: 11px;
  }
}
```

You'll see some other items in there such as `prince-script`. This means we're using JavaScript to run some functions to dynamically generate that content. These JavaScript functions are located in the `_includes/head_print.html`:

```
<script>
  Prince.addScriptFunc("datestamp", function() {
    return "PDF last generated: August 12, 2015";
  });
</script>

<script>
  Prince.addScriptFunc("guideName", function() {
    return "Jekyll Documentation Theme for Designers User Guide";
  });
</script>
```

There are a couple of Prince functions that are default functions from Prince. This gets the heading title of the page:

```
content: string(doctype);
```

This gets the current page:

```
content: "Page " counter(page);
```

Because the theme uses JavaScript in the CSS, you have to add the `--javascript` tag in the Prince command (detailed later on this page).

## 5. Customize the `doc_multiserve_pdf.sh` script

Open the `doc_multiserve_pdf.sh` file in the root directory and customize it for your specific configuration files.

```
echo 'Killing all Jekyll instances'
kill -9 $(ps aux | grep '[j]ekyll' | awk '{print $2}')
clear

# serve all di print deliverables

# Writers
echo "Serving Writers PDF"
jekyll serve --detach --config configs/config_writers.yml,configs/config_writers_pdf.yml

# Designers
echo "Serving Designers PDF"
jekyll serve --detach --config configs/config_designers.yml,configs/config_designers_pdf.yml
```

Note that the first part kills all Jekyll instances. This way you won't try to server Jekyll at a port that is already occupied.

The `jekyll serve` command serves up the PDF configurations for our two projects. This web version is where Prince will go to get its content.

## 6. Configure the Prince scripts

Open up `doc_multibuild_pdf.sh` and look at the Prince commands:

```
prince --javascript --input-list=../doc_designers-pdf/prince-file-list.txt -o /Users/tjohnson/projects/documentation-theme-jekyll/doc_designers_pdf.pdf;
```

This script issues a command to the Prince utility. JavaScript is enabled ( `--javascript` ), and we tell it exactly where to find the list of files ( `--input-list` ) — just point to the `prince-file-list.txt` file. Then we tell it where and what to output ( `-o` ).

Make sure that the path to the `prince-file-list.txt` is correct. For the output directory, I like to output the PDF file into my project's source. Then when I build the web output, the PDF is included and something I can refer to.

## 7. Add a download button for the PDF

You can add a download button for your PDF using some Bootstrap button code:

```
<a target="_blank" class="noCrossRef" href="doc_designers_pdf.pdf"><button type="button" class="btn btn-default" aria-label="Left Align"><span class="glyphicon glyphicon-download-alt" aria-hidden="true"></span> Designers PDF Download</button></a>
```

Here's what that looks like:

 Designers PDF Download

## 8. Run the scripts

To generate the PDF, you just run several scripts that have the commands packaged up:

1. First run `doc_multiserve_pdf.sh` to serve up the PDF sites. The commands will detach the site from the preview server so that you can serve up multiple Jekyll sites in the same command terminal.
2. Then run `doc_multibuild_pdf.sh` to build the PDF files.
3. Now run `doc_multibuild_web.sh` to build the web version that includes the generated PDF files.

**Note:** If you don't like the style of the PDFs, just adjust the styles in the `printstyles.css` file.

## JavaScript conflicts

I've noticed that when I have JavaScript in my pages, sometimes Prince doesn't like this, as it tries to process the JavaScript. It's better to conditionalize out any JavaScript from your PDF output before building your PDFs. If Prince encounters JavaScript on a page, it will give you this error:

```
prince: http://127.0.0.1:4002/designers/doc_shuffle.html:2: error: TypeError: value is not an object
```

However, the PDF will still build.

If you encounter this error, surround the JavaScript with conditional tags like this:

```
{% unless site.print == false %}  javascript content here ...  
{% endunless %}
```

## Excluding files

By default, all files in your project are included in your output. To exclude files, note them in the `exclude` section in the configuration file. Here's a sample:

```
exclude:
- "Gemfile"
- "Gemfile.lock"
- drafts
- _site/documentation-theme-jekyll
- bower_components
```

If you have different outputs for your site, you'll want to customize the exclude sections in your various configuration files.

Here's the process I recommend. Put all files in the root directory of your project. Suppose one project's name is alpha and the other is beta. Then name each file as follows:

- `alpha_sample.html`
- `beta_sample.html`

In your exclude list for your beta project, specify it as follows:

```
exclude:
- alpha_*
```

In your exclude list for your alpha project, specify it as follows:

```
- beta_*
```

If you have more sophisticated exclusion, add another level to your file names. For example, if you have different programming languages you want to filter by, add this:

- `alpha_java_sample.html`
- `alpha_cpp_sample.html`

Then you exclude files for your Alpha C++ project as follows:

```
exclude:  
  
- alpha_java_*  
- beta_*
```

And you exclude files for your Alpha Java project as follows:

```
exclude:  
  
- alpha_cpp_*  
- alpha_beta_*
```

There isn't a way to automatically exclude all folders. By default, everything is included unless you explicitly list it under the exclude section.

#### ## Excluding draft content

If you're working on a draft, put it inside the `\_drafts` folder or add ``published: false`` in the frontmatter. The `\_drafts` folder is excluded by default, so you don't have to specify it in your exclude list.

#### ## Limitations

What if a file should appear in two projects but not the third? This can get tricky. For some files, rather than using a wildcard, you may need to manually specify the entire filename that you're excluding instead of excluding it by way of pattern.

# Help APIs and UI tooltips

You can create a help API that developers can use to pull in content.


## Full code demo

For the full code demo, see the notes in the [Tooltip Demo](#) (page 0).

In this demo, the popovers pull in and display content from the information in an external tooltips.json file located on a different host.

## Diagram overview

Here's a diagram showing the basic idea of the help API:

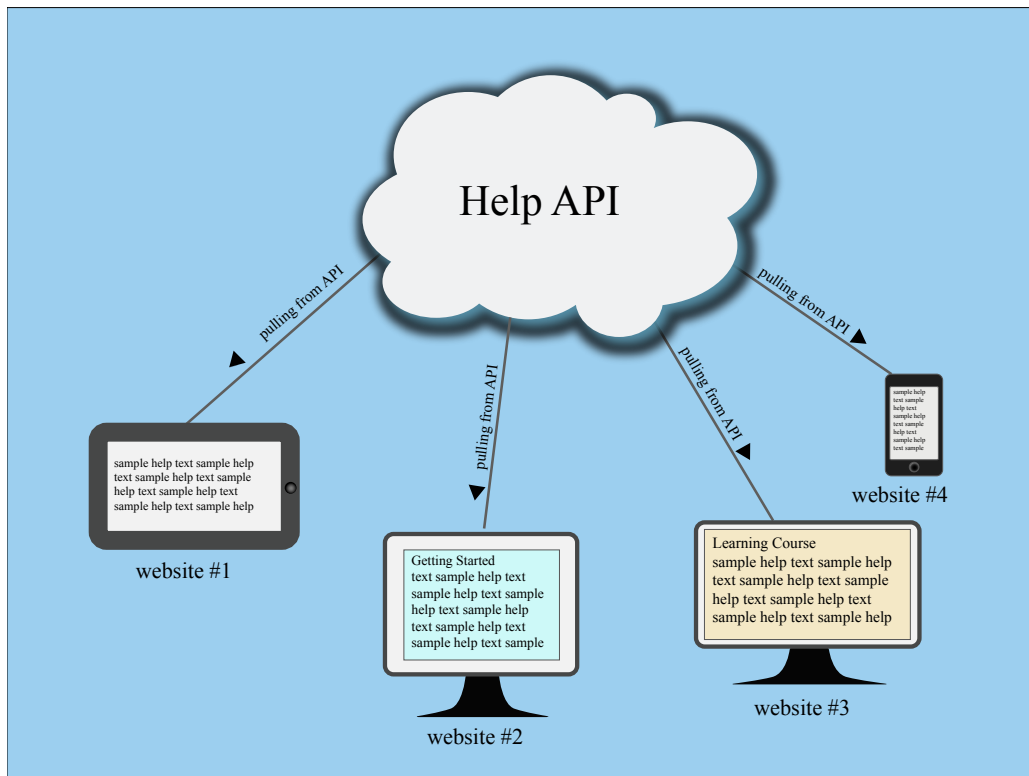

Is this really an API? Well, sort of. The help content is pushed out into a JSON file that other websites and applications can easily consume. The endpoints don't deliver different data based on parameters added to a URL. But the overall concept is similar to an API: you have a client requesting resources from a server.

Note that in this scenario, the help is openly accessible on the web. If you have a private system, it's more complicated.

To deliver help this way using Jekyll, follow the steps in each of the sections below.

## 1. Create a "collection" for the help content (optional)

A collection is another content type that extends Jekyll beyond the use of pages and posts. Here I'm calling the collection "tooltips." You could also just use pages, but if you have a lot of content, it will take longer to look up information in the file because the lookup will have to scan through all your site content instead of just the tooltips.

Add the following information to your configuration file to declare your collection:

```
collections:
  tooltips:
    output: true
```

In your Jekyll project, create a new folder called "\_tooltips" and put every page that you want to be part of that tooltips collection inside that folder.

## 2. Create pages in your collection

Create pages inside your new tooltips collection. Each page needs only a unique `id` in the frontmatter. Here's an example:

```
---
id: basketball
---

{{site.data.definitions.basketball}}
```

You need to create a separate page for each resource you want to deliver. In this setup, the definition of basketball is stored in a data file call definitions inside the `_data` folder so that we can re-use it in other parts of the help as well. (This additional re-use is covered later on this page.)

### 3. Create a JSON file that loops through your collection pages

Add the following to a file and call it `tooltips.json`:

```
---
layout: none
---
{
  "entries":
  [
    {% for page in site.tooltips %}
    {
      "id"      : "{{ page.id }}",
      "body": "{{ page.content | strip_newlines | replace:
'\', '\\\\' | replace: '\"', '\\\"' }}"
    } {% unless forloop.last %},{% endunless %}
    {% endfor %}
  ]
}
```

This code will loop through all pages in the `tooltips` collection and insert the `id` and `body` into key-value pairs for the JSON code. Here's an example of what that looks like after it's process by Jekyll in the site build: [Tooltips](#) (page 0).

**Tip:** Check out [Google's style guide for JSON](https://google-styleguide.googlecode.com/svn/trunk/jsoncstyleguide.xml) (<https://google-styleguide.googlecode.com/svn/trunk/jsoncstyleguide.xml>). These best practices can help you keep your JSON file valid.

Store this file in your root directory. You can add different fields depending on how you want the JSON to be structured. Here I just have to fields: `id` and `body` . And the JSON is looking just in the `tooltips` collection that I created.

When you build your site, Jekyll will iterate through every page in your `_tooltips` folder and put the page `id` and `body` into this format.

You could create different JSON files that specialize in different content. For example, suppose you have some getting started information. You could put that into a different JSON file. Using the same structure, you might add an `if` tag that

checks whether the page has frontmatter that says "getting\_started: true" or something. Or you could put it into a separate collection entirely (different from tooltips).

By chunking up your JSON files, you can provide a quicker lookup, though I'm not sure how big the JSON file can be before you experience any latency with the jQuery lookup.

## 4. Allow CORS access to your help if stored on a remote server

When people make calls to your site *from other domains*, you must allow them access to get the content. To do this, you have to enable something called CORS (cross origin resource sharing) within the server where your help resides.

In other words, people are going to be executing calls to reach into your site and grab your content. Just like the door on your house, you have to unlock it so people can get in. Enabling CORS is unlocking it.

How you enable CORS depends on the type of server.

If your server setup allows htaccess files to override general server permissions, then create an .htaccess file and add the following:

```
Header set Access-Control-Allow-Origin "*"
```

Store this in the same directory as your project. This is what I've done in a directory on my web host (bluehost.com). Inside <http://idratherbewriting.com/wp-content/apidemos/>, I uploaded a file called htaccess with the preceding code. After I uploaded it, I renamed it to .htaccess, right-clicked the file and set the permissions to 774.

To test whether your server permissions are set correctly, open a terminal and run the following curl command pointing to your tooltips.json file:

```
curl -I http://idratherbewriting.com/wp-content/apidemos/tooltips.json
```

If the server permissions are set correctly, you should see the following line somewhere in the response:

```
Access-Control-Allow-Origin: *
```

If you don't see this response, CORS isn't allowed for the file.

If you have an AWS S3 bucket, you can supposedly add a CORS configuration to the bucket permissions. Log into AWS S3 and click your bucket. On the right, in the Permissions section, click **Add CORS Configuration**. In that space, add the following policy:

```
<CORSConfiguration>
  <CORSRule>
    <AllowedOrigin>*/</AllowedOrigin>
    <AllowedMethod>GET</AllowedMethod>
  </CORSRule>
</CORSConfiguration>
```

Although this should work, in my experiment it doesn't. And I'm not sure why...

In other server setups, you may need to edit one of your Apache configuration files. See [Enable CORS](http://enable-cors.org/server.html) (<http://enable-cors.org/server.html>) or search online for ways to allow CORS for your server.

If you don't have CORS enabled, users will see a CORS error/warning message in the console of the page making the request.

## 5. Explain how developers can access the help

Developers can access the help using the `.get` method from jQuery, among other methods. Here's an example of how to get a page with the ID of `basketball` :

```
<script type="text/javascript">
$(document).ready(function(){

var url = "{{site.baseUrl}}/tooltips.json";

$.get( url, function( data ) {

    $.each(data.entries, function(i, page) {
        if (page.id == "basketball") {
            $( "#basketball" ).attr( "data-content", page.b
ody );
        }
    });
});

});
</script>
```

The `url` is where your `tooltips.json` file is. The `each` method looks through all the JSON content to find the item whose `page.id` is `basketball`. It then looks for an element on the page named `#basketball` and adds a `data-content` attribute to that element.

**⚠ Warning: Note:** Make sure your JSON file is valid. Otherwise, this method won't work. I use the [JSON Formatter extension for Chrome](https://chrome.google.com/webstore/detail/json-formatter/bcjindcccaagfpapjjmafapmmgkkhgoa?hl=en) (<https://chrome.google.com/webstore/detail/json-formatter/bcjindcccaagfpapjjmafapmmgkkhgoa?hl=en>). When I go to the `tooltips.json` page in my browser, the JSON content -- if valid -- is nicely formatted (and includes some color coding). If the file isn't valid, it's not formatted and there isn't any color. You can also check the JSON formatting using [JSON Formatter and Validator](http://jsonformatter.curiousconcept.com/) (<http://jsonformatter.curiousconcept.com/>). If your JSON file isn't valid, identify the problem area using the validator and troubleshoot the file causing issues. It's usually due to some code that isn't escaping correctly.

Why `data-content` ? Well, in this case, I'm using [Bootstrap popovers](http://getbootstrap.com/javascript/#popovers) (<http://getbootstrap.com/javascript/#popovers>) to display the tooltip content. The `data-content` attribute is how Bootstrap injects popovers.

Here's the section on the page where the popover is inserted:

```
<p>Basketball <span class="glyphicon glyphicon-info-sign" id="basketball" data-toggle="popover"></span></p>
```

Notice that I just have `id="basketball"` added to this popover element. Developers merely need to add a unique ID to each tooltip they want to pull in the help content. Either you tell developers the unique ID they should add, or ask them what IDs they added (or just tell them to use an ID that matches the field's name).

In order to use jQuery and Bootstrap, you'll need to add the appropriate references in the head tags of your page:

```
<link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.2/css/bootstrap.min.css">
<script src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.2/js/bootstrap.min.js"></script>

<script type="text/javascript">
$(document).ready(function(){
    $('[data-toggle="popover"]').popover({
        placement : 'right',
        trigger: 'hover',
        html: true
    });
});
```

By the way, Bootstrap's popovers require you to initialize them using the above code -- they aren't turned on by default.

View the source code of the [Tooltip Demo](#) (page 0) for the full comments.

## 6. Create easy links to embed the help in your help site

You might also want to insert the same content into different parts of your help site. For example, if you have tooltips providing definitions for fields, you'll probably want to create a page in your help that lists those same definitions. You could use the same method developers use to pull help content into their applications. But it will probably be easier to simply use Jekyll's tags for doing it.

Here's a demo:

```
<h2>Reuse Demo</h2>

<table>
<thead>
<tr>
<th>Sport</th>
<th>Comments</th>
</tr>
</thead>
<tbody>

<tr>
<td>Basketball</td>
<td>{{site.data.definitions.basketball}}</td>
</tr>

<tr>
<td>Baseball</td>
<td>{{site.data.definitions.baseball}}</td>
</tr>

<tr>
<td>Football</td>
<td>{{site.data.definitions.football}}</td>
</tr>

<tr>
<td>Soccer</td>
<td>{{site.data.definitions.soccer}}</td>
</tr>
</tbody>
</table>
```

And here's the code:

## Reuse Demo

SPORT	COMMENTS
Basketball	Basketball is a sport involving two teams of five players each competing to put a ball through a small circular rim 10 feet above the ground. Basketball requires players to be in top physical condition, since they spend most of the game running back and forth along a 94-foot-long floor.
Baseball	Baseball is considered America's pasttime sport, though that may be more of a historical term than a current one. There's a lot more excitement about football than baseball. A baseball game is somewhat of a snooze to watch, for the most part.
Football	No doubt the most fun sport to watch, football also manages to accrue the most injuries with the players. From concussions to blown knees, football players have short sport lives.
Soccer	If there's one sport that dominates the world landscape, it's soccer. However, US soccer fans are few and far between. Apart from the popularity of soccer during the World Cup, most people don't even know the name of the professional soccer organization in their area.

## Search configuration

The search is configured through the search.json file in the root directory. Take a look at that code if you want to change what content is included.

The search is a simple search that looks at content in pages. It looks at both titles and bodies. However, the search doesn't work like google -- you can't hit return and see a list of results on the search results page, with the keywords in bold. Instead, this search shows a list of page titles that contain keyword matches. It's fast, but simple.

## Excluding pages form search

By default, every page is included in the search. The configuration file specifies this default in the frontmatter of every page:

```
defaults:
-
  scope:
    path: ""
    type: "pages"
  values:
    layout: "page"
    comments: true
    search: true
-
  scope:
    path: ""
    type: "posts"
  values:
    layout: "post"
    comments: true
    search: true
```

Some pages will break the JSON formatting. If that happens, then the search will no longer work. If you want to exclude a page from search add `search: exclude` in the frontmatter.

## Troubleshooting search

You should exclude any files from search that you don't want appearing in the search results. For example, if you have a `tooltips.json` file or `prince-file-list.txt`, don't include it, as the formatting will break the JSON format.

If any formatting in the `search.json` file is invalid (in the build), search won't work. You'll know that search isn't working if no results appear when you start typing in the search box.

If this happens, go directly to the `search.json` file in your browser, and then copy the content. Go to a [JSON validator](http://jsonlint.com/) (<http://jsonlint.com/>) and paste in the content. Look for the line causing trouble. Edit the file to either exclude it from search or fix the syntax so that it doesn't invalidate the JSON.

The `search.json` file already tries to strip out content that would otherwise make the JSON invalid:

```
"body": "{{ page.content | strip_html | strip_newlines |
replace: '\\', '\\\\' | replace: '\"', '\\\"' }}"
```

However, it's possible that the formatting may not account for all the scenarios that would invalidate the JSON.

## Customizing search results

At some point, you may want to customize the search results more. Here's a little more detail that will be helpful. The `search.json` file retrieves various page values:

```
{% if page.search == true %}
{
  "title": "{{ page.title | escape }}",
  "tags": "{{ page.tags }}",
  "keywords": "{{page.keywords}}",
  "url": "{{ page.url | replace: '/', '' }}",
  "last_updated": "{{ page.last_updated }}",
  "summary": "{{page.summary}}",
  "body": "{{ page.content | strip_html | strip_newlines |
replace: '\\', '\\\\' | replace: '\"', '\\\"' }}"
}
```

The `_includes/topnav.html` file then makes use of these values:

```
<!-- start search -->
<div id="search-demo-container">
<input type="text" id="search-input" placeholder="search...">
<ul id="results-container"></ul>
</div>
<script src="js/jekyll-search.js" type="text/javascript"></script>
<script type="text/javascript">
SimpleJekyllSearch.init({
  searchInput: document.getElementById('search-input'),
  resultsContainer: document.getElementById('results-container'),
  dataSource: 'search.json',
  searchResultTemplate: '<li><a href="{url}" title="Search configuration">{title}</a></li>',
  noResultsText: 'No results found.',
  limit: 10,
  fuzzy: true,
})
</script>
<!-- end search -->
</li>
```

Where you see `{url}` and `{title}`, the search is retrieving the values for these as specified in the `search.json` file.

At some point, you may want to add in the `{summary}` as well. You could create a dedicated search page that could include the summary as an instant result as you type.

## Pushing builds to server

**Summary:** You can push your build to AWS using commands from the command line.

### Pushing to AWS S3

If you have the AWS Command Line Interface installed and are pushing your builds to AWS, the following commands show how you can build and push to an AWS location from the command line:

```
#aws s3 cp ~/users/tjohnson/projects/documentation-theme-jekyll-builds/writer s3://[aws path]documentation-theme-jekyll/writer --recursive

#aws s3 cp ~/users/tjohnson/projects/documentation-theme-jekyll-builds/designer s3://[aws path]/documentation-theme-jekyll/designer --recursive
```


### Pushing to a regular server

If you're pushing to a regular server that you can ssh into, you can use `scp` commands to push your build. Here's an example:

```
scp -r /Applications/XAMPP/xamppfiles/htdocs/documentation-theme-jekyll/writers name@domain:/var/www/html/documentation-theme-jekyll/writers
```


## Knowledge-base layout

This shows a sample layout for a knowledge base. Each square could link to a tag archive page. In this example, font icons from Font Awesome are enlarged to a large size. You could also add captions below each icon, and so forth. In a real implementation, you would probably make your own square graphics that included the text inside them.




Getting Started

(page 0)




(page 0)

[Navigation](#) (page 0)




Single-sourcing

(page 0)




Publishing

(page 0)



Special layouts

(page 0)



Formatting

(page 0)

## Linking to non-tag archive pages

If you don't want to link to a tag archive index, you could link to a page with code like this:

Getting started pages:

```
<ul>
{% for page in site.pages %}
{% for tag in page.tags %}
{% if tag == "getting-started" %}
<li><a href="{{page.url}}">{{page.title}}</a></li>
{% endif %}
{% endfor %}
{% endfor %}
</ul>
```

Getting started pages:

Here are all pages tagged with getting\_started:

- [Getting started with this theme](#) (page 0)
- [Pages](#) (page 0)
- [Support](#) (page 0)
- [Supported features](#) (page 0)
- [Theme customization](#) (page 0)
- [Introduction](#) (page 0)

## Scroll layout

This page demonstrates how you the integration of a script called ScrollTo, which is used here to link definitions of a JSON code sample to a list of definitions for that particular term. The scenario here is that the JSON blocks are really long, with extensive nesting and subnesting, which makes it difficult for tables below the JSON to adequately explain the term in a usable way.

```

{
  "apples" (page 120): "red fruit at the store",
  "bananas" (page 120): "yellow bananas in a bunch",
  "carrots" (page 120): "orange vegetables that grow in the ground",
  "dingbats" (page 120): "a type of character symbol on a computer",
  "eggs" (page 120): "chickens lay them, and people eat them",
  "falafel" (page 120): "a Mediterranean sandwich consisting of lots of different stuff i don't know much about",
  "giraffe" (page 121): "tall animal, has purple tongue",
  "hippo" (page 121): "surprisingly dangerous amphibian",
  "igloo" (page 121): "an ice shelter made by eskimos",
  "jeep" (page 121): "the only car that starts with a j",
  "kilt" (page 121): "something worn by scottish people, not a dress",
  "lamp" (page 121): "you use it to read by your bedside at night",
  "manifold" (page 121): "an intake mechanism on a car, like a valve, i think",
  "octopus" (page 122): "eight tentacles, shoots ink, lives in dark caves, very mysterious",
  "paranoia" (page 122): "the constant feeling that others are out to get you, conspiring against your success",
  "qui" (page 122): "a life force that runs through your body",
  "radical" (page 122): "someone who opposes the status quo in major ways",
  "silly" (page 122): "how I feel writing this dummy copy",
  "taffy" (page 122): "the sweets children like the most and dentists hate the worst",
  "umbrella" (page 122): "an invention that has not had any advancements in 200 years",
  "vampire" (page 123): "a paranormal figure that is surprisingly in vogue despite its basic nature",
  "washington" (page 123): "the place where tom was born",
  "xylophone" (page 123): "some kind of pinging instrument used to sound chime-like notes",
  "yahoo" (page 123): "an expression of exuberance, said under breath when something works right",
  "zeta" (page 123): "the way british people pronounce z",
  "alpha" (page 123): "the original letter of the alphabet, which has since come to mean the first. however, i think"
}

```

k the original symbol of alpha is actually an ox. it is somewhat of a mystery to linguists as to the exact origin of the letter alpha, but it is generally accepted that it is derived from the word "alpha", which is the Greek word for "beginning". The word "alpha" is derived from the word "alpha", which is the Greek word for "beginning". The word "alpha" is derived from the word "alpha", which is the Greek word for "beginning".

"beta" (page 124): "the period of time when something is finished but undergoing testing by a group of people.",

"cappa" (page 124): "how italians refer to their baseball caps",

"dunno" (page 124): "informal expression for 'don't know'",

Curabitur quis non sed eros viverra tempus et quis lorem. Nulla convallis sit amet risus vitae rutrum. Nulla at faucibus lectus. Pellentesque tortor nisi, interdum ac quam non, egestas congue massa. Vestibulum non porttitor lacus. Nam tincidunt arcu lectus. Donec eget ornare neque, hendrerit ornare lectus. In ac pretium odio.

### carrots

Vivamus pulvinar vestibulum pharetra. Vivamus vitae diam iaculis, posuere mi sed, dignissim massa. Nunc vitae aliquet urna. Proin sed pulvinar ex. Maecenas nisi lorem, rutrum sit amet hendrerit sed, posuere at odio. Sed consectetur semper tristique. Vivamus finibus varius felis at convallis. Fusce in dictum nunc.

### dingbats

Curabitur feugiat lorem eget elit ullamcorper tincidunt. In euismod diam aliquet tortor fermentum tempor. Fusce quam felis, commodo viverra orci vitae, scelerisque aliquet risus.

### eggs

Duis est nunc, fringilla eu ligula et, varius dignissim dui. Vivamus in tellus vitae ipsum vehicula fermentum at congue tellus. Suspendisse fermentum, magna vitae aliquet sodales, tellus nisi rutrum arcu, vitae auctor dolor quam ac tellus. Cras posuere augue erat, in sagittis quam lacinia id.

### falafel

Praesent auctor a enim non lacinia. Integer sodales aliquet mi vel dapibus. Donec consequat justo eget nisi lacinia, eu sodales ligula molestie. Sed sapien nulla, rhoncus at elementum a,

### **giraffe**

Nullam venenatis at lectus sed pharetra. Sed hendrerit ligula lectus, non pellentesque diam faucibus sit amet. Aliquam dictum hendrerit pellentesque. Cras eu nisl sagittis, faucibus velit sit amet, sagittis odio. Donec vulputate ex vitae purus

### **hippo**

Cras nec pretium nulla. Suspendisse tempus tortor vel venenatis pulvinar. Integer varius tempor enim fringilla tincidunt. Phasellus magna turpis, auctor vitae elit eget, fringilla pellentesque est. Phasellus ut porta risus. Curabitur iaculis sapien sed venenatis auctor. Integer eu orci at lectus eleifend auctor id rutrum urna.

**Fusce rhoncus elit sed quam laoreet placerat. Praesent lacinia metus quis felis mollis, ac facilisis risus consequat. Phasellus laoreet feugiat lacus. Etiam a neque est.**

### **jeep**

Nulla vitae metus rutrum, condimentum orci nec, maximus est. Aenean sit amet ante nec elit dignissim faucibus eget quis quam.

### **kilt**

Morbi maximus, erat vel rhoncus sagittis, dolor purus dignissim ante, sit amet pharetra ex justo vitae ipsum. Nulla consequat interdum neque

### **lamp**

Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Mauris aliquam dapibus blandit. Donec porta, enim hendrerit venenatis vulputate, orci diam lacinia nibh, faucibus rutrum dolor dui ut quam.

### **manifold**

Donec finibus massa vel nisi ullamcorper, vitae ornare enim euismod. Aliquam auctor quam erat. Duis interdum rutrum orci, ac interdum urna pharetra eget.

**octopus**

Nulla id egestas enim. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Suspendisse potenti. Curabitur eu lobortis ligula.

**paranoia**

Aenean hendrerit mauris ipsum, non laoreet ipsum luctus vel. Curabitur tristique auctor elit ut pulvinar. Quisque arcu arcu, condimentum aliquam sodales nec, dignissim nec justo. Nunc tristique sem felis, pharetra euismod lorem volutpat sed. Ut porttitor metus sit amet elit rhoncus semper.

**qui**

Quisque rhoncus cursus felis vel elementum. Vestibulum dignissim molestie tortor nec facilisis. Praesent a nibh condimentum, porta nulla egestas, auctor eros

**radical**

Etiam hendrerit interdum tellus, at aliquet sapien egestas in. Aenean eu urna nisl. Cras vitae risus pharetra, elementum mauris nec, auctor lectus. Fusce pellentesque venenatis dictum. Proin at augue at mauris finibus semper ultricies sed eros.

**silly**

Praesent pulvinar consequat posuere. Morbi egestas rhoncus felis, id fermentum metus lobortis in. Vestibulum nibh orci, euismod eget vestibulum nec, vehicula vitae tortor. Aenean ullamcorper enim nunc, eu auctor ligula auctor eget.

**taffy**

Etiam et arcu vel lacus aliquet lobortis in in massa. Nunc non mollis elit. Aenean accumsan orci quis risus aliquam, non gravida nulla molestie. Mauris pharetra libero et magna aliquam aliquam. Integer quis luctus dolor.

**umbrella**

Fusce molestie finibus malesuada. Nullam ac egestas quam, id venenatis ligula. Pellentesque pulvinar elit et vestibulum fringilla. Cras volutpat sed quam ornare scelerisque. Vivamus volutpat ante pretium scelerisque

tempus. Etiam venenatis tempor nisl dignissim sollicitudin. Curabitur ac risus vitae dolor pretium posuere vel vitae diam. Donec in odio arcu.

### **vampire**

Vestibulum pretium condimentum commodo. Integer placerat leo non ipsum ultrices, ac convallis elit varius. Vestibulum ultricies, justo eu rutrum molestie, quam arcu euismod sapien, vel gravida ipsum nulla eget erat.

### **washington**

Nunc ac quam eu risus dictum sodales. Nam ac risus iaculis, aliquet sem eu, mollis mauris. Curabitur pretium facilisis orci ut lacinia. Sed fermentum leo a odio blandit rutrum. Phasellus at nibh vel odio interdum vulputate ac eget urna. Nam eu arcu dapibus, sodales ligula nec, volutpat ipsum. Suspendisse auctor tellus vitae libero euismod venenatis.

### **xylophone**

Sed molestie lobortis ante sit amet hendrerit. Sed pharetra nisi sed interdum pulvinar. Nunc efficitur erat non aliquam mattis. Sed id nisl mattis lacus vehicula volutpat vitae vel massa. Curabitur interdum velit odio, vitae sollicitudin nunc rutrum non.

### **yahoo**

Nunc commodo consectetur scelerisque. Proin fermentum ligula ac quam finibus tincidunt. Aenean venenatis nisi et semper semper. Nunc sodales velit ipsum, ac pellentesque augue placerat eu.

**Nullam ac suscipit odio. Curabitur viverra arcu ut egestas sollicitudin. Fusce sodales varius lectus ut tristique. Etiam eget nunc ornare, aliquet tortor eget, consequat mauris. Integer sit amet fermentum augue.**

### **alpha**

Praesent nec neque ac tellus sodales eleifend nec vel ipsum. Cras et semper risus. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Integer mattis leo nisl, a tincidunt lectus tristique eget. Donec finibus lobortis viverra. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae;

Vivamus egestas pulvinar odio non vehicula. Morbi malesuada leo eget nisl sagittis aliquet.

**Mauris a libero vel enim pharetra interdum non a quam. Sed tincidunt ut elit sed dignissim. Suspendisse vitae tellus dapibus, fermentum lacus ac, fermentum lacus. Nam ante odio, fringilla ac elementum a, mollis sed tellus.**

### **cappa**

Nam molestie semper nulla et molestie. Ut facilisis, ipsum sed convallis posuere, mi mauris bibendum erat, nec egestas ipsum est nec dolor.

### **dunno**

Etiam et metus congue, commodo libero et, accumsan sem. Aliquam erat volutpat. Quisque tincidunt, tortor non blandit ullamcorper, orci mauris dignissim augue, eget vehicula nulla justo sed dolor. Nunc ac urna quis nisi maximus pharetra in a mauris. Proin metus mi, venenatis vitae tristique sed, fermentum at purus. Aliquam erat volutpat. Maecenas efficitur sodales nibh, ac hendrerit felis facilisis et. Interdum et malesuada fames ac ante ipsum primis in faucibus.

# Shuffle layout

[All](#)[Getting Started](#)[Formatting](#)[Publishing](#)[Single Sourcing](#)[Special Layouts](#)

## Getting started

If you're getting started with Jekyll, see the links in this section. It will take you from the beginning level to comfortable.

- [Getting started with this theme](#) (page 0)
- [Pages](#) (page 0)
- [Support](#) (page 0)
- [Supported features](#) (page 0)
- [Theme customization](#) (page 0)
- [Introduction](#) (page 0)

## Formatting

These topics get into formatting syntax, such as images and tables, that you'll use on each of your pages:

- [Tooltips](#) (page 0)
- [Alerts](#) (page 0)
- [Glossaries](#) (page 0)
- [Icons](#) (page 0)
- [Images](#) (page 0)
- [Labels](#) (page 0)
- [Links](#) (page 0)
- [Pages](#) (page 0)
- [Syntax highlighting](#) (page 0)
- [Tables](#) (page 0)
- [Video embeds](#) (page 0)

[Single Sourcing](#)[Publishing](#)

These topics cover strategies for single-sourcing:

- [Conditional logic](#) (page 0)
- [Content reuse](#) (page 0)
- [Excluding files](#) (page 0)

- [Build arguments](#) (page 0)
- [Generating PDF](#) (page 0)
- [Help APIs and UI tooltips](#) (page 0)
- [iTerm profiles](#) (page 0)
- [Pushing builds to server](#) (page 0)
- [Search configuration](#) (page 0)
- [Themes](#) (page 0)

### Special Layouts

These pages highlight special layouts outside of the conventional page and TOC hierarchy.

- [FAQ](#) (page 0)
- [Knowledge-base layout](#) (page 0)
- [Scroll layout](#) (page 0)
- [Shuffle layout](#) (page 0)
- [Special layouts](#) (page 0)

## FAQ

If you want to use an FAQ format, use the syntax shown on the [faq.html](#) page. Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s.

[Lorem ipsum dolor sit amet, consectetur adipiscing elit?](#) (page 0)

[Curabitur eget leo at velit imperdiet varius. In eu ipsum vitae velit congue iaculis vitae at risus?](#) (page 0)

[Aenean consequat lorem ut felis ullamcorper?](#) (page 0)

[Lorem ipsum dolor sit amet, consectetur adipiscing elit?](#) (page 0)

[Curabitur eget leo at velit imperdiet varius. In eu ipsum vitae velit congue iaculis vitae at risus?](#) (page 0)

[Aenean consequat lorem ut felis ullamcorper?](#) (page 0)

[Lorem ipsum dolor sit amet, consectetur adipiscing elit?](#) (page 0)

[Curabitur eget leo at velit imperdiet varius. In eu ipsum vitae velit congue iaculis vitae at risus?](#) (page 0)

[Aenean consequat lorem ut felis ullamcorper?](#) (page 0)

## Glossaries

You can create a glossary for your content. First create your glossary items in a data file such as glossary.yml.

Then create a page and use definition list formatting, like this:

```
<dl class="dl">

<dt id="fractious">fractious</dt>
<dd>Like a little mischevious child, full of annoying and constant trouble.</dd>

<dt id="gratuitous">gratuitous</dt>
<dd>Something that is unwarranted and uncouth, like the social equivalent of a flagrant foul.</dd>

<dt id="haughty">haughty</dt>
<dd>Proud and flaunting it. Holding your head high up like a snooty, too-good-for-everything rich person.</dd>

<dt id="gratuitous">gratuitous</dt>
<dd>Something that is unwarranted and uncouth, like the social equivalent of a flagrant foul.</dd>

<dt id="impertinent">impertinent</dt>
<dd>Someone acting rude and insensitive to others.</dd>

<dt id="intrepid">intrepid</dt>
<dd>Brave and courageous especially in a difficult, dangerous situation.</dd>

</dl>
```

Here's what that looks like:

### **fractious**

Like a little mischevious child, full of annoying and constant trouble.

**gratuitous**

Something that is unwarranted and uncouth, like the social equivalent of a flagrant foul.

**haughty**

Proud and flaunting it. Holding your head high up like a snooty, too-good-for-everything rich person.

**gratuitous**

Something that is unwarranted and uncouth, like the social equivalent of a flagrant foul.

**impertinent**

Someone acting rude and insensitive to others.

**intrepid**

Brave and courageous especially in a difficult, dangerous situation.

The glossary works well as a link in the top navigation bar.

## Horizontally styled definiton lists

You can also change the definition list ( `dl` ) class to `dl-horizontal` . This is a Bootstrap specific class. If you do, the styling looks like this:

**fractious**

Like a little mischevious child, full of annoying and constant trouble.

**gratuitous**

Something that is unwarranted and uncouth, like the social equivalent of a flagrant foul.

**haughty**

Proud and flaunting it. Holding your head high up like a snooty, too-good-for-everything rich person.

**gratuitous**

Something that is unwarranted and uncouth, like the social equivalent of a flagrant foul.

**impertinent**

Someone acting rude and insensitive to others.

**intrepid**

Brave and courageous especially in a difficult, dangerous situation.

If you squish your screen small enough, at a certain breakpoint this style reverts to the regular `d1` class.

Although I like the side-by-side view for shorter definitions, I found it problematic with longer definitions.

## Tag archives overview

This is an overview to the tag archives section. Really the only reason this section is listed explicitly in the TOC here is to demonstrate how to add a third-level to the navigation.

## Tag archives overview

This is an overview to the tag archives section. Really the only reason this section is listed explicitly in the TOC here is to demonstrate how to add a third-level to the navigation.

## Tag archives overview

This is an overview to the tag archives section. Really the only reason this section is listed explicitly in the TOC here is to demonstrate how to add a third-level to the navigation.

## Tag archives overview

This is an overview to the tag archives section. Really the only reason this section is listed explicitly in the TOC here is to demonstrate how to add a third-level to the navigation.

## Tag archives overview

This is an overview to the tag archives section. Really the only reason this section is listed explicitly in the TOC here is to demonstrate how to add a third-level to the navigation.

## Tag archives overview

This is an overview to the tag archives section. Really the only reason this section is listed explicitly in the TOC here is to demonstrate how to add a third-level to the navigation.