



# Jekyll theme for documentation — mydoc product

version 5.0

*Last generated: July 03, 2016*

---



Company  
logo

© 2016 Your company. This is a boilerplate copyright statement... All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other noncommercial uses permitted by copyright law.

# Table of Contents

## Overview

Get started .....	3
5.0 Release notes .....	11
Sample formatting .....	13
Introduction .....	30
Supported features .....	31
About the theme author .....	36
Support.....	37

## Installation

About Ruby, Gems, Bundler, etc. ....	38
Install Jekyll on Mac .....	45
Install Jekyll on Windows .....	49

## Authoring

Pages .....	52
Posts .....	58
Conditional logic.....	60
Content reuse.....	65
Collections.....	68

## Navigation

Sidebar navigation.....	70
YAML tutorial in the context of Jekyll.....	73
Tags.....	84
Series.....	90

## Formatting

Tooltips.....	93
Alerts .....	94
Icons.....	101
Images.....	109

Labels .....	112
Links .....	113
Navtabs .....	114
Tables .....	117
Syntax highlighting .....	121
<b>Handling reviews</b>	
Commenting on files .....	123
<b>Publishing</b>	
Build arguments .....	126
Themes .....	129
Check page title consistency .....	0
Generating PDFs .....	130
Help APIs and UI tooltips .....	142
Search configuration .....	154
iTerm profiles .....	158
Pushing builds to server .....	160
Getting around the password prompts in SCP .....	161
Publishing on Github Pages .....	165
<b>Special layouts</b>	
Knowledge-base layout .....	168
Glossary layout .....	171
FAQ layout .....	174
<b>Troubleshooting</b>	
Troubleshooting .....	177

## Quick start guide

**Summary:** These brief instructions will help you get started quickly with the theme. The other topics in this help provide additional information and detail about working with other aspects of this theme and Jekyll.

### Build this theme

If you're used to running Jekyll sites, you can type the normal jekyll command, `jekyll serve`, to build the Jekyll theme. However, if you're a new Jekyll user or if you run into issues, see the following two topics:

- [Install Jekyll on Mac \(page 0\)](#)
- [Install Jekyll on Windows \(page 0\)](#)

### Customize the Gemfile

Open the Gemfile (in any text editor) in the Jekyll doc theme project:

```
open Gemfile
```

The theme's gemfile looks as follows:

```
# A sample Gemfile
source "https://rubygems.org"

# gem "rails"
gem 'github-pages'
gem 'jekyll'
```

If you're publishing on Github Pages, leave the `github-pages` gem there. But if not, remove `github-pages` because Github sometimes has dependencies that conflict with the latest versions of the Jekyll gem and Kramdown, which can be frustrating.

Use Bundler to install all the needed Ruby gems:

```
bundle install
```

Now run Jekyll serve to build the theme:

```
jekyll serve
```

## Configure the sidebar

There are several products in this theme. Each product uses a different sidebar. This is the essence of what makes this theme unique – different sidebars for different product documentation. The idea is that when users are reading documentation for a specific product, the sidebar navigation should be specific to that product. (You can read more of my thoughts on why multiple sidebars are important in this [blog post](#)

(<http://idratherbewriting.com/2016/03/23/release-of-documentation-theme-for-jekyll-50/>.)

The top navigation remains the same, because it allows users to navigate across products. But the sidebar navigation adapts to the product.

Because each product uses a different sidebar, you'll need to set up your sidebars. There's a file inside `_includes/custom` called "sidebarconfigs.html". This file controls which sidebar gets associated with which product. Open up this file to see its contents.

The sidebarconfigs.html file uses simple `if elsif` logic to set a variable that the sidebar.html file uses to read the sidebar data file. The code in sidebarconfigs.html looks like this:

```
{% if page.sidebar == "home_sidebar" %}
{% assign sidebar = site.data.sidebars.home_sidebar.entries %}

{% elsif page.sidebar == "product1_sidebar" %}
{% assign sidebar = site.data.sidebars.product1_sidebar.entries %}

{% elsif page.sidebar == "product2_sidebar" %}
{% assign sidebar = site.data.sidebars.product2_sidebar.entries %}

{% elsif page.sidebar == "mydoc_sidebar" %}
{% assign sidebar = site.data.sidebars.mydoc_sidebar.entries %}

{% elsif page.sidebar == "tags_sidebar" %}
{% assign sidebar = site.data.sidebars.tags_sidebar.entries %}

{% else %}
{% assign sidebar = site.data.sidebars.home_sidebar.entries %}
{% endif %}
```

In each page's frontmatter, you must specify the sidebar you want that page to use. Here's an example of the page frontmatter showing the sidebar property:

```
---
title: Alerts
tags: [formatting]
keywords: notes, tips, cautions, warnings, admonitions
last_updated: July 3, 2016
summary: "You can insert notes, tips, warnings, and important alerts in your content. These notes are stored as shortcodes made available through the linksrefs.html include."
sidebar: mydoc_sidebar
permalink: mydoc_alerts/
---
```

The `sidebar: mydoc_sidebar` refers to the `_data/sidebars/mydoc_sidebar.yml` file (meaning, the `mydoc_sidebar.yml` file inside the `\data` folder and `sidebars` subfolder).

If no sidebar assignment is found in the page frontmatter, the default sidebar (specified by the `else` statement) will be shown:

```
site.data.sidebars.home_sidebar.entries .
```

Note that your sidebar can only have 2 levels. Given that each product has its own sidebar, this depth should be sufficient (it's really like 3 levels). Deeper nesting goes against usability recommendations.

Additionally, each level must have at least one topic before the next level starts.

For more detail on the sidebar, see [Sidebar navigation \(page 0\)](#).

## Sidebar syntax

The sidebar data file uses a specific YAML syntax that you must follow. Follow the sample pattern shown in the theme. For example:

```
entries:
- title: sidebar
  product: Jekyll Doc Theme
  version: 5.0
  folders:

  - title: Overview
    output: web, pdf
    folderitems:

    - title: Get started
      url: /home
      output: web, pdf

    - title: 5.0 Release notes
      url: /mydoc_release_notes_50
      output: web, pdf

    - title: Sample formatting
      url: /mydoc_sample_formatting
      output: web, pdf
```

Each `folder` or `subfolder` must contain a `title` and `output` property. Each `folderitem` or `subfolderitem` must contain a `title`, `url`, and `output` property.

The two outputs available are `web` and `pdf`. (Even if you aren't publishing PDF, you still need to specify `output: web`).

The YAML syntax depends on exact spacing, so make sure you follow the pattern shown in the sample sidebars. See my [YAML tutorial \(page 73\)](#) for more details about how YAML works.

To accommodate the title page and table of contents in PDF outputs, each product sidebar must list these pages before any other:

```
- title:
  output: pdf
  type: frontmatter
  folderitems:
  - title:
    url: /titlepage
    output: pdf
    type: frontmatter
  - title:
    url: /tocpage
    output: pdf
    type: frontmatter
```

Leave the output as `output: pdf` for these frontmatter pages so that they don't appear in the web output.

For more detail on the sidebar, see [Sidebar navigation \(page 0\)](#) and [YAML tutorial \(page 0\)](#).

## Page frontmatter

When you write pages, include these same frontmatter keys with each page:

```
---
title: "Some title"
tags: [sample1, sample2]
keywords: keyword1, keyword2, keyword3
last_updated: Month day, year
summary: "optional summary here"
sidebar: sidebar name
permalink: yoururl/
---
```

(You will customize the values for each of these keys, of course.)

For titles, surrounding the title in quotes is optional, but if you have a colon in the title, you must surround the title with quotation marks. If you have a quotation mark within the title, escape it first with a backslash `\`.

Values for `keywords` get populated into the metadata of the page for SEO.

Values for `tags` must be defined in your `_data/tags.yml` list. You also need a corresponding tag file inside the `tags` folder that follows the same pattern as the other tag files shown in the `tags` folder. (Jekyll won't auto-create these tag files.)

If you don't want the mini-TOC to show on a page (such as for the homepage or landing pages), add `toc: false` in the frontmatter.

For more detail, see [Pages \(page 0\)](#).

## Where to store your documentation topics

Store your files for each product inside subfolders following the pattern shown in the theme. For example, `product1`, `product2`, etc. You can store your topics inside sub-subfolders or sub-sub-folders to your heart's content. When Jekyll builds your site, it will pull the topics into the root directory and use the permalink for the URL.

Note that `product1`, `product2`, and `mydoc` are all just sample content to demonstrate how to add multiple products into the theme. You can freely delete that content.

For more information, see [Pages \(page 0\)](#) and [Posts \(page 0\)](#).

## Configure the top navigation

The top navigation bar's menu items are set through the `_data/topnav.yml` file. Use the top navigation bar to provide links for navigating from one product to another, or to navigate to external resources.

For external URLs, use `external_url` in the item property, as shown in the example `topnav.yml` file. For internal links, use `url` as usual.

Note that the `topnav` has two sections: `topnav` and `topnav_dropdowns`. The `topnav` section contains single links, while the `topnav_dropdowns` section contains dropdown menus. The two sections are independent of each other.

## Generating PDF

If you want to generate PDF, you'll need a license for [Prince XML](http://www.princexml.com/) (<http://www.princexml.com/>). You will also need to [install Prince](http://www.princexml.com/doc/installing/) (<http://www.princexml.com/doc/installing/>). You can generate PDFs by product (but not for every product on the site combined together into one massive PDF). Prince will work even without a license, but it will imprint a small Prince image on the first page, and you're supposed to buy the license to use it.

Open up the `css/printstyles.css` file and customize the email address (`youremail@domain.com`) that is listed there. This email address appears in the bottom left footer of the PDF output. You'll also need to create a PDF configuration file following the examples shown in the `pdfconfigs` folder, and also customize some build scripts following the same pattern shown in the root: `pdf-product1.sh`

See the section on [Generating PDFs \(page 0\)](#) for more details about setting the theme up for this output.

## Blogs / News

For blog posts, create your markdown files in the `_posts` folder following the sample formats. Post file names always begin with the date (`YYYY-MM-DD-title`).

The `news/news.html` file displays the posts, and the `news_archive.html` file shows a yearly history of posts. In documentation, you might use the news to highlight product features outside of your documentation, or to provide release notes and other updates.

See [Posts \(page 0\)](#) for more information.

## Markdown

This theme uses Kramdown markdown. Kramdown is similar to Github-flavored Markdown, except that when you have text that intercepts list items, the spacing of the intercepting text must align with the spacing of the first character after the space of a numbered list item. Basically, with your list item numbering, use two spaces after the dot in the number, like this:

1. First item
2. Second item
3. Third item

When you want to insert paragraphs, notes, code snippets, or other matter in between the list items, use four spaces to indent. The four spaces will line up with the first letter of the list item (the **F**irst or **S**econd or **T**hird).

- ```
1. First item  
   \ \ \  
   alert("hello");  
   \ \ \
```
- ```
2. Second item  
   Some pig!
```
- ```
3. Third item
```

See the topics under “Formatting” in the sidebar for more information.

## Managing links

If you want to use a simple system for managing links, see the “Managed Links” section in [Links \(page 0\)](#).

## Other instructions

For other details in working with the theme, see the various sections in the sidebar.

## Release notes 5.0

**Summary:** Version 5.0 of the Documentation theme for Jekyll changes some fundamental ways the theme works to provide product-specific sidebars, intended to accommodate a site where multiple products are grouped together on the same site rather than generated out as separate outputs.

### Unique sidebars for each product

In previous versions of the theme, I built the theme to generate different outputs for different scenarios based on various filtering attributes that might include product, version, platform, and audience variants.

However, this model results in siloed outputs and lots of separate file directories to manage. Instead of having 30 separate sites for your content (or however many variants you might have been producing), in this version of the theme I've moved towards a strategy of having one site with multiple products.

For each product, you can associate a unique sidebar with each of the product's pages. This allows you to have all your documentation on one site, but with separate navigation that is tailored to a view of that product.

You can still output to both web and PDF. And if you really need multiple site outputs, you can still do so by using multiple configuration files that trigger different builds. But my conclusion after using the multiple site output model for some years is that it's a bad practice for tech comm.

### Permalinks

With this theme, since you'll be publishing to one site, I've implement permalinks instead of relative links. Using permalinks means the way you store pages is much more flexible. You can store topics in folders and subfolders, etc., to any degree. But note that with permalinks you can't view the content offline (outside of Jekyll's preview server) nor on a separate site other than the one specified in the configuration file. Permalinks are how Jekyll was designed to work, and the sites just work better that way.

## Kramdown and Rouge

I also switched from redcarpet and Pygments to Kramdown and Rouge to align with the current direction of Jekyll 3.0. Kramdown is a Markdown filter (it's slightly different from Github-flavored Markdown). Rouge is a syntax highlighter. Pygments had some dependencies on Python, which made it more cumbersome for Windows users.

## Blog feature

I included a blog feature with this version of the theme. You can write posts and view them through the News link. There's also an archive for blog posts that sorts posts by year.

Additionally, the tagging system works across both the blog and pages, so your tags allow users to move laterally across the site based on topics they're interested in. When you view a tag archive, the sidebar shows a list of tags.

## Updated documentation

I updated the documentation for the theme. The switch from the multi-site outputs to the single-site with multiple sidebars required updating a lot of different parts of the documentation and code.

## Fixed errors

Previously I had some errors with the HTML that showed up in w3c HTML validator analyses. This caused some small problems in certain browsers or systems less tolerant of the errors. I fixed all of the errors.

## Accessing the old theme

If you want to access the old theme, you can still find it [here](https://github.com/tomjohnson1492/jekylldoctype-theme-separate-outputs) (<https://github.com/tomjohnson1492/jekylldoctype-theme-separate-outputs>).

## Sample formatting

**Summary:** This page shows sample formatting.

✓ **Tip:** Keep this topic in your project, as it demonstrates how to format everything with kramdown-flavored Markdown.

## Jekyll Overview

To get started with Jekyll, you will use a theme called [GenericDocs](https://code.amazon.com/packages/GenericDocs/trees/mainline) (<https://code.amazon.com/packages/GenericDocs/trees/mainline>) (which you are currently viewing). The GenericDocs theme has everything set up for you to author and publish content. It's assumed that you will download this project and customize it with your own content.

The GenericDocs project has two outputs defined: one that looks like the new Developer Portal, and one that is designed to be copied and pasted into Hippo pages.

## Make Updates to Previous Theme Versions

If you previously downloaded GenericDocs and already customized it, see the [\[Changelog\]\[changelog\]](#) file to know what updates have been released and how to incorporate the updates.

## Atom Editor

If you haven't downloaded [Atom](https://atom.io/) (<https://atom.io/>), download and install it. Use this as your editor when working with Jekyll. The syntax highlighting is probably the best among the available editors, as it was designed with Jekyll-authoring in mind. However, if you prefer Sublime Text, WebStorm, or some other editor, you can also use that.

Customize the invisibles and tab spacing in Atom:

1. Go to **Atom > Preferences**.
2. On the **Settings** tab, keep the default options but also select the following:

- **Show Invisibles**
- **Soft Wrap**
- For the **Tab Length**, type **4**.
- For the **Tab Type**, select **soft**.

Turn off auto-complete:

1. Go to **Atom > Preferences**.
2. Click the **Packages** tab.
3. Search for **autocomplete-plus**.
4. Disable the autocomplete package.

### Atom Shortcuts

- **Cmd + T**: Find file
- **Cmd + Shift + F**: Find across project
- **Cmd + Alt + S**: Save all

(For Windows, replace “Cmd” with “Ctrl”.)

## Git Clients

If you haven't installed Git, do so. For Windows users, consider using [Git Bash](https://git-for-windows.github.io/) (<https://git-for-windows.github.io/>) as your Git client, as this will allow you to run shell scripts.

For Mac users, [iTerm](https://www.iterm2.com/) (<https://www.iterm2.com/>) is the recommended terminal emulator.

## Clone the GenericDocs Project

See [Using Git for Docs](#)

([https://w.amazon.com/index.php/DeveloperCommunications/Using\\_Git\\_for\\_Docs](https://w.amazon.com/index.php/DeveloperCommunications/Using_Git_for_Docs)) for more detail about working with Git. Basically, clone the GenericDocs project:

```
git clone ssh://git.amazon.com/pkg/GenericDocs
```

After cloning the project, rename the folder to your own project's name. Then remove the Config and .git folder (hidden).

**Note:** You don't have to use Git when working with Jekyll. Managing your content through version control is optional. If you're interested in using the Amazon internal Git repository, see [Using Git for Docs](https://w.amazon.com/index.php/DeveloperCommunications/Using_Git_for_Docs) ([https://w.amazon.com/index.php/DeveloperCommunications/Using\\_Git\\_for\\_Docs](https://w.amazon.com/index.php/DeveloperCommunications/Using_Git_for_Docs)).

## Install Jekyll

Jekyll must be able to run on your computer. Jekyll is based on Ruby, so your computer needs Ruby to build and run Jekyll. To install Jekyll, see the following help topics:

- [Install Jekyll on a Mac](http://idratherbewriting.com/documentation-theme-jekyll/mydoc_install_jekyll_on_mac/)  
([http://idratherbewriting.com/documentation-theme-jekyll/mydoc\\_install\\_jekyll\\_on\\_mac/](http://idratherbewriting.com/documentation-theme-jekyll/mydoc_install_jekyll_on_mac/))
- [Install Jekyll on Windows](http://idratherbewriting.com/documentation-theme-jekyll/mydoc_install_jekyll_on_windows/)  
([http://idratherbewriting.com/documentation-theme-jekyll/mydoc\\_install\\_jekyll\\_on\\_windows/](http://idratherbewriting.com/documentation-theme-jekyll/mydoc_install_jekyll_on_windows/))

## Run the Build Commands

Use Git Bash to run these commands, as Git Bash allows you to run shell scripts.

To build the Jekyll output, run this on your command line:

```
. jekyll.sh
```

This is just a shortcut. You could also just enter this manually:

```
jekyll serve --config configjekyll.yml
```

To build the Hippo output, run this on your command line:

```
. hippo.sh
```

You could also just enter this manually:

```
jekyll serve --config confighippo.yml
```

The sites will build in the `_site` folder in your project. (Each build will overwrite the contents of `_site` with the build you specified. If you want the builds to output into separate folders, use the `--destination` flag in the build command and specify the directory.)

In both cases, when you build the site you receive a preview URL to view the site, similar to this:

```
http://127.0.0.1:4000/
```

Here's what it looks like:

### *Sample Jekyll output*

You can also just browse the Jekyll site by clicking the `index.html` file from your Finder or Explorer. (Note that this theme gives you an estimate of what it will look like in the Developer Portal. The search and login features won't work locally.)

With the Hippo build, although the terminal gives you a preview URL, ignore it. Instead, just browse to the build folder (`_site`) and look at the HTML files. To get the content into Hippo, you have to copy and paste the contents of each HTML file into the Hippo interface file by file.

Jekyll rebuilds the project each time you save a change. To stop the build process, press **Ctrl+C**.

## Edit the Table of Contents

The table of contents is managed through data in a YAML file inside the `_data > sidebars` folder.

Sidebars must follow a unique format as follows:

```
entries:
- title: sidebar
  folders:

  - title: My Folder Title
    folderitems:

    - title: Sample Topic
      jurl: /sample.html
      hurl: https://developer.amazon.com/public/solutions/devic
es/fire-tv/docs/sample
      ref: sample-topic

    - title: Sample2 Topic
      jurl: /sample2.html
      hurl: https://developer.amazon.com/public/solutions/devic
es/fire-tv/docs/sample2
      ref: sample-topic-2
```

Don't change any of the level names, such as `entries`, `folders`, and `folderitems`. The theme's template files use a `for` loop to iterate through this structure based on these level terms.

Each entry in your TOC (the entries are your pages that appear under `folderitems`) must have these properties:

- `title`: The page title.
- `hurl`: The Hippo URL. Use an absolute link.
- `jurl`: The Jekyll URL. Use a relative link that begins with a `/` and contains the file extension (`.html`) at the end. Use `.html` even if your file is Markdown.
- `ref`: The shortname used to create the markdown link references. More detail is explained in the [Automated Links \(page 0\)](#) section.

Why not just have one link? Here's the reason:

- Links in Hippo must be *absolute*, not relative.
- Links in a standalone Jekyll site that is viewed locally on your computer and on other locations like Corp Drive must be *relative*.

Ideally, we would just have relative links all around. But Hippo's absolute URL requires us to specify another property. Hence the need for two URLs. The `ref` property is like a variable used to refer to either the `hurl` or `jurl` property, depending on which build you use (`confighippo.yml` or `configjekyll.yml`).

## Add Navigation Between Doc Sets

You might want several different sidebars for your documentation. As a best practice, sidebars that are too massive aren't helpful. Having a sidebar appropriate to the user's specific tasks is ideal. To facilitate movement from one doc set to another, it's helpful to include some links at the bottom of the sidebar that point to other categories. You can see an example with the [Fire TV docs](https://developer.amazon.com/public/solutions/devices/fire-tv) (<https://developer.amazon.com/public/solutions/devices/fire-tv>) or with the GenericDocs output.

If you want to add a section to your sidebar that has a vertical bar above it, add these pages under a `entrypages` element. The `entrypages` element (highlighted in red below) must be at the same level as `folderitems` :

```

folders:
- title: My Folder Title

  folderitems:
  # ... (items omitted)

  entrypages:
  - title: Other Page
    jurl: /other.html
    hurl: https://developer.amazon.com/public/solutions/devic
es/fire-tv/docs/other
    ref: other

  - title: Other2 Pages
    jurl: /other2.html
    hurl: https://developer.amazon.com/public/solutions/devic
es/fire-tv/docs/other2
    ref: other2

```

In the hippo sidebar, the bar will look like this:

It looks similar in the Jekyll build as well. To change the default text of “Other Sections” to something else, edit the text manually in the `\_includes > amazonsidebar.html` file. `## Configure the Sidebar Files` The GenericDocs project is intended to be customized. As part of the customization, you'll rename the sidebar files. `### Rename the Sidebars in \_data Folder` Rename the sidebar files inside the `\_data` folder to be specific to your project: 1. In `\_data/sidebars`, rename `**genericsidebar.yml**` to something like

**myawesomeprojectsidebar.yml**. 2. Inside **myawesomeprojectsidebar.yml**, change the `sidebarTitle` value to the title you want. This title appears at the top of the sidebar in the Hippo theme. 3. Leave the other structure and content in that sidebar as is for now. Look at the pattern to see how you add entries to your sidebar table of contents. ### Update the Sidebarconfigs.html file 1. Inside `\_includes` folder, open **sidebarconfigs.html**. 2. Customize the sidebar names in this file to match your sidebar names. Here's what the sidebarconfigs.html file's contents look like: ```javascript {% if page.sidebar == "genericsidebar" %} {% assign sidebar = site.data.sidebars.genericsidebar.entries %} {% endif %} {% if page.sidebar == "othersidebar" %} {% assign sidebar = site.data.sidebars.othersidebar.entries %} {% endif %} ``` This file is used to match up the sidebar specified in the page's frontmatter with the actual sidebar code. It roughly says this: If the `sidebar` property in the page's frontmatter says to use the `genericsidebar`, assign the `sidebar` variable to point to the code in the `\_data / sidebars / genericsidebar.yml` file. If the `sidebar` property in the page's frontmatter says to use the `othersidebar`, assign the `sidebar` variable to point to the code in the `\_data / sidebars / othersidebar.yml`. In general, when you have more than 20 or so links in your sidebar, it's wise to break that sidebar up into multiple sidebars. This way users aren't overwhelmed by too many options, and the sidebar will still be meaningful. You can allow users to switch sidebar links by referencing some files at the bottom that take users to the other sidebars (this is explained in [Adding Navigation Between Doc Sets](#addingnavdocsets)). ### Rename the Sidebar Files in hippo\\_menus 1. In the **hippo\\_menus** folder, rename the files with the same sidebar names you chose earlier. 2. Open each menu in hippo\\_menus and change each instance of the sidebarname (for example, `genericsidebar`) to your new sidebar name. There should be 4 instances to change. To change the name of "Other Sections" in the Jekyll theme, open the `\_includes/amazonsidebar.html` file and update the text for "Other Sections." ### Upload Your Sidebars into Media Central {#uploadsidebarsmediacentral} After you have finished populating your sidebars with entries, you will need to upload the sidebar files into Media Central to make them available within Hippo. This isn't required for the Jekyll output — just for the Hippo output. (You'll do this later, when you're ready to publish your output.) 1. Build the **hippo.yml** target. 2. Browse into your **\\_site** folder (which contains the built site). 3. Go into the **hippo\\_menus** folder. (Make sure you are inside `\_site` and not just the root directory.) 4. Upload your sidebar menus into Media Central [here](https://mediacentral.amazon.com/apps/basic/media-viewer/index.mhtml#command=getdirectory&path=mobile-apps/devportal/menus&ou=1).

**Note:** HTML files get cached here and expire on an hourly basis. If you're experimenting with your files and need to see faster updates, open a single HTML page that references the menu and change the TTH to something like V2349340 where the numbers after V are simply random.

**## Pages and Frontmatter** Each Jekyll file (using an .md extension) has frontmatter at the top set off with three hyphens at the top and bottom. The frontmatter for each page should look like this: ````` yaml --- title: My File Name sidebar: genericsidebar --- ````` Replace `genericsidebar` with the name of your sidebar data file that you want associated with the page. If you have a colon in your title, put the title's value in parentheses, like this: `````yaml --- title: "Alexa: Voice-enabled interface" sidebar: genericsidebar --- ````` The format for any content in the frontmatter must be in YAML syntax. You can't use Liquid or other ```{{}}``` syntax here. (In other words, no variables in YAML.) Store all pages in your root directory. You cannot put files inside of subfolders (due to the need to make links relative).

**## File Organization** All files must be stored in the root directory of your project. You can't group them into folders and subfolders. (Storing everything in root simplifies paths to JS, CSS, and other assets -- it allows the Jekyll site to be viewed anywhere.)

**## Markdown Formatting** Jekyll uses [kramdown-flavored Markdown](http://kramdown.gettalong.org/). You can read up more on kramdown and implement any of the techniques available.

**## Alerts** Use the alerts include templates, like this: `````liquid {% include note.html content="This is a note." %} `````

**\*\*Result:\*\***

**📌 Note:** This is a note.

----- `````liquid {% include tip.html content="This is a tip." %} ````` **\*\*Result:\*\***

**👍 Tip:** This is a tip.

----- `````liquid {% include warning.html content="This is a warning." %} ````` **\*\*Result:\*\***

**⚠ Warning:** This is a warning.

----- Alerts have just one include property: ``content``. If you need to use quotation inside the ``content`` quotation marks, use single quotes for ``content`` and double quotes inside the single quotes, like this: `````liquid {% include warning.html content='This is a "serious" warning.' %} ````` **\*\*Result:\*\***

**⚠ Warning:** This is a “serious” warning.

**## Use Liquid Variables Inside Parameters with Includes** `{#variable-includes}`

Suppose you have a product name or some other property that you're storing as a variable in your configuration file (`confighippo.yml` and `configjekyll.yml`), and you want to use this variable in the ``content`` parameter for your alert or callout. You will get an error if you use Liquid syntax inside a include parameter. For example, this syntax will produce an error: `````liquid {% include note.html content="The`

`{{site.company}}` is pleased to announce an upcoming release." %}" The error will say something like this: " Liquid Exception: Invalid syntax for include tag. File contains invalid characters or sequences:... Valid syntax: {% include file.ext param='value' param2='value' %}" To use variables in your include parameters, you must use the "variable parameter" approach. First you use a `capture` tag to capture some content. Then you reference this captured tag in your include. Here's an example. In my site configuration file, I have a property called `myvariable`. "yaml myvariable: ACME" I want to use this variable in my note include. First, before the note I capture the content for my note's include like this: "liquid {% capture company\_note %}The {{site.myvariable}} company is pleased to announce an upcoming release.{% endcapture %}" Now reference the `company\_note` in your `include` parameter like this: "liquid {% include note.html content=company\_note %}" Here's the result:

**Note:** The company is pleased to announce an upcoming release.

Note the omission of quotation marks with variable parameters. Also note that instead of storing the variable in your site's configuration file, you could also put the variable in your page's frontmatter. Then instead of using `{{site.myvariable}}` you would use `{{page.myvariable}}`. ## Using Markdown Inside of Alerts You can use Markdown inside of alerts, even though this content actually gets inserted inside of HTML in the include. This is one of the advantages of kramdown Markdown. The include template has an attribute of `markdown="span"` that allows for the processor to parse Markdown inside of HTML. If you're creating your own includes, note this property. ## Headings Use pound signs before the heading title to designate the level. Note that headings must have one space before and after the heading. " ## Second-level heading " ## Second-level heading ----- " ### Third-level heading " ### Third-level heading ----- " #### Fourth-level heading " #### Fourth-level heading ## Headings with ID Tags `{#someIdTag}` If you want to use a specific ID tag with your heading, add it like this: " ## Headings with ID Tags `{#someIdTag}` " Then you can reference it with a link like this on the same page: " [Some link](#someIdTag) " **Result:** [Some link](#someIdTag) Or if you're linking to it from another page, add this property into the other.yml file in your `\_data/sidebars` folder: "yaml - title: Some link bookmark href: http://somehippurl.com/#someIdTag url: /sample.html#someIdTag ref: [someIdTag] " And reference it like this: " This is [Some link][someIdTag] " **Result:** This is [Some link][someIdTagz]. ## Bulleted Lists This is a bulleted list: " \* first item \* second item \* third item " **Result:** \* first item \* second item \* third item ## Numbered list This is a simple numbered list: " 1. First item. 1. Second item. 1. Third item. " **Result:** 1. First item. 1. Second item. 1. Third item. You can use whatever numbers you want — when the Markdown filter processes the content, it will assign the correct numbers to the list items. ## Complex Lists Here's a more complex list: " 1. Sample first item. \* sub-bullet one \* sub-bullet two 2. Continuing the list 1. sub-list numbered one 2.

sub-list numbered two 3. Another list item. `` \*\*Result:\*\* 1. Sample first item. \*  
 sub-bullet one \* sub-bullet two 2. Continuing the list 1. sub-list numbered one 2.  
 sub-list numbered two 3. Another list item. ## Another Complex List Here's a list  
 with some intercepting text: `` 1. Sample first item. This is a result statement that  
 talks about something.... 2. Continuing the list

**Note:** Remember to do this. If you have “quotes”, you must escape them.

Here's a list in here: \* first item \* second item 3. Another list item. ``js function  
 alert("hello"); `` 4. Another item. `` \*\*Result:\*\* 1. Sample first item. This is a result  
 statement that talks about something.... 2. Continuing the list

**Note:** Remember to do this. If you have “quotes”, you must escape them.

Here's a list in here: \* first item \* second item 3. Another list item. ``js function  
 alert("hello"); `` 4. Another item. ### Key Principle to Remember with Lists The key  
 principle is to line up the first character after the dot following the number:

*Lining up the left edge ensures the list stays in tact.*

For the sake of simplicity, use two spaces after the dot for numbers 1 through 9. Use one space for numbers 10 and up. If any part of your list doesn't align symmetrically on this left edge, the list will not render correctly. Also note that this is characteristic of kramdown-flavored Markdown and may not yield the same results in other Markdown flavors. ## Sidebar Table of Contents The theme generates the sidebar table of contents from the YAML files in the `\_data/sidebars` folder. Look carefully at the YAML syntax in these files, as you must match the syntax with the same spacing and indentations. The `genericsidebar.yml` and `othersidebar.yml` are intended to be replaced with the real names of your sidebars. Each entry in the sidebar files includes three properties — ``jurl``, ``hurl``, and ``ref``. These stand for Jekyll URL, Hippo URL, and how you want to refer to the URL using reference-Markdown style linking. Here's an example: ``yaml - title: Sample Topic jurl: /sample.html hurl: https://somalonghippouurl.com/somefolder/sample.html `` Why are there two links? This handles the relative versus absolute link requirements on the two platforms (a local computer or Corp Drive, and Hippo). When editing the sidebar, in order to get the spacing exactly right, it's probably easiest to copy and paste entries when you need new ones. ## Automated Links `{#automatedlinks}` Automated links is the recommended way of handling links. For each item in your table of contents, include a ``ref`` property like this: ``yaml - title: Sample Topic jurl: /sample.html hurl: https://developer.amazon.com/public/solutions/devices/fire-tv/docs/sample ref: sample `` Then open `confighippo.yml` and `configjekyll.yml` and make sure each of

your sidebars is listed in the `sidebars` properties, like this: ``yaml sidebars: - genericsidebar - othersidebar - other `` The links.html file (in the `\_includes` folder) will automatically create the markdown reference style links for each item in your sidebar. Just add an include for links.html at the bottom of each of your pages: ``liquid {% include links.html %} `` Now you can create markdown-reference style links, using the `ref` property in your sidebar table of contents for the markdown referent value: `` [My Quick Start page][quickstart] `` The value for `ref` is what gets used as the Markdown referent. (There's no way to automate the link title, so if you update a page title, do a find and replace to update any instances of the title in these links.) For links that don't appear in your table of contents, such as bookmarks links or links to pages not otherwise listed in your TOC, add them in the other.yml file in the `\_data/sidebars` folder. Here's an example link to a bookmark: `` - title: Partner bookmark hurl: https://developer.amazon.com/public/solutions/devices/fire-tv/docs/catalog/catalog-data-format-schema-reference#Partner jurl: /catalog-data-format-schema-reference.html#Partner ref: catalog-data-format-schema-reference-bookmark-partner `` On the page, you might reference the link like this: `` See the [Partner section][catalog-data-format-schema-reference-bookmark-partner]. `` For links to external web resources, just use regular Markdown style linking: `` See the [Android documentation](https://developer.android.com/index.html) `` Or or Markdown-reference style linking: `` See the [Android documentation][androiddocs] ... lots of content... [androiddocs][https://developer.android.com/index.html] `` If the link points to a resource that should be the same for both Jekyll and Hippo outputs (a rare case), and you want to store this resource in the sidebar file rather than manually using traditional Markdown syntax, make the `jurl` and `hurl` values the same.

**Tip:** If the link formatting doesn't render correctly in your output, something is wrong with the link. Check to make sure you included the links.html file at the bottom of the file, and that your referent is correct. If you updated something in your confighippo.yml or configjekyll.yml file, you must restart Jekyll in order to see the result.

## Linking to Your Homepage For the home page TOC entry, the entry in in your sidebar data file should be `index.html` and an additional property should be included: `type: homepage`, like this: `` - title: Quick Start Guide jurl: /index.html hurl: https://developer.amazon.com/public/solutions/devices/fire-tv/docs/ type: homepage ref: [quickstart] `` (The amazonsidebar.html file needs the `type: homepage` property to process the file differently because the `page.url` property for the index.md file renders as `/` instead of as `/index.html`. Additionally, the `jurl` must specify the link as `index.html` to accommodate Corp Drive, which doesn't auto-resolve to index.html on its own, and to facilitate the sidebar menu highlighting.) ## Manual Links If you prefer to handle links manually, you can populate the links.html file in your `\_includes` folder manually. In links.html, first

remove (or comment out) the existing content. Then create one section for Jekyll URLs and another for Hippo URLs, like this: ```` {% if site.target == "jekyll" %} [Quick Start]: [quickstart.html] [other123]: [other.html] {% endif %} {% if site.target == "hippo" %} [sample]: [http://somalonghippouri.com/somesubpath/sample.html] [other123]: [http://somalonghippouri.com/somesubpath/other.html] {% endif %} ```` (Ideally, you would not need the special Hippo section. But Hippo pages require all the URLs to be absolute URLs. However, if you're viewing content locally, you need the URLs to be relative, not absolute. Hence the need for two URLs. These `if` tags are probably the easiest way to set up this distinction.) Similar to before, at the bottom of each page, include the links.html file: ````liquid {% include links.html %} ````

## Code Samples Use fenced code blocks with the language specified, like this: ````js console.log('hello'); ```` \*\*Result:\*\* ````js console.log('hello'); ```` For the list of supported languages you can use (similar to `js` for JavaScript), see [Supported languages](https://github.com/jneen/rouge/wiki/list-of-supported-languages-and-lexers).

## Markdown Tables Use standard Markdown syntax for tables: ```` | Priority apples | Second priority | Third priority | |-----|-----|-----| | ambrosia | gala | red delicious | | pink lady | jazz | macintosh | | honeycrisp | granny smith | fuji | ````

\*\*Result:\*\* | Priority apples | Second priority | Third priority | |-----|-----|-----| | ambrosia | gala | red delicious | | pink lady | jazz | macintosh | | honeycrisp | granny smith | fuji |

You can't use block level tags (paragraphs or lists) inside Markdown tables, so if you need separate paragraphs inside a cell, use `

`. ## HTML Tables {#htmltables} If you need a more sophisticated table syntax, use HTML syntax for the table. Although you're using HTML, you can use Markdown inside the table cells by adding `markdown="1"` as an attribute for the `td`, as shown in the following table. You can also control the column widths.

````html

| To create...   | Use this skill type                              |
|--|--|
| A skill that can handle just about any type of request.  | Custom skill ( <i>custom interaction model</i> ) |
| For example:   | See [Sample 3][sample-3]                         |
| <ul style="list-style-type: none"> <li>• Look up information from a web service</li> <li>• Integrate with a web service to order something (order a car from Uber, order a pizza from Domino's Pizza)</li> <li>• Interactive games</li> <li>• Just about anything else you can think of</li> </ul> | ...(more content...)                             |

| To create...                             | Use this skill type                       |
|--|---|
| ...(content in second row, first column) | ...(content in second row, second column) |

``` \*\*Result:\*\*

| To create...                                                                                                                                                                                                                                                                                                                                                                          | Use this skill type                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| <p>A skill that can handle just about any type of request.</p> <p>For example:</p> <ul style="list-style-type: none"> <li>• Look up information from a web service</li> <li>• Integrate with a web service to order something (order a car from Uber, order a pizza from Domino's Pizza)</li> <li>• Interactive games</li> <li>• Just about anything else you can think of</li> </ul> | <p>Custom skill (<i>custom interaction mode</i>) See [Sample 3][sample-3] ...(more content...)</p> |
| ...(content in second row, first column)                                                                                                                                                                                                                                                                                                                                              | ...(content in second row, second column)                                                          |

## Images ### Storing Images on MediaCentral You'll publish your images via [Media Central](https://mediacentral.amazon.com/), so you need to set up your access to this resource and configure your folders. To upload images into Media Central, you must be part of the [ms-mediacentral-users](https://permissions.amazon.com/group.mhtml?target=706819) permissions group. To delete images in Media Central, you must be part of the ms-mediasnb-pwr group. Make sure you're added to both of these groups (manager permission required). Create a folder on Media Central for your doc's images. It doesn't matter exactly what folder path you choose, but for consistency, create the folder for devices under this directory: **ROOT/mobile-apps/dex**. To create a new folder on Media Central: 1. Go to [Media Central](https://mediacentral.amazon.com/). 2. Enter the new path (for example, **mobile-apps/dex/myawesomeproject**) into the Goto New/Existing Directory box near the top-center of the screen. The content area will initially appear blank

when you go to this new folder path. 3. Click **Upload** to this directory and upload a test image into your new folder. 4. Click **Info** under the image and copy the HTTPS path to the image. Paste the link into a text editor — you'll need it in the next section when you configure the `image_path` in the `confighippo.yml` file.

### Customize the Image Path in the `confighippo.yml` File In this section, you'll customize the configuration files to be specific to your own project. 1. Open the `confighippo.yml` file. 2. In `confighippo.yml`, change the `image_path`` to correspond to the place on Media Central where you're hosting images. It should look something like this: `https://images-na.ssl-images-amazon.com/images/G/01/mobile-apps/dex/myawesomeproject/` Be sure to include the forward slash (`/`) at the end.

### Formatting for Images Use the `image.html` include template that is set up: ```liquid {% include image.html file="amazon_developer" type="png" url="http://developer.amazon.com" alt="My alternative image text" caption="This is my caption" %} ``` **Result:**

My alternative image text

*This is my caption*

The image include's properties are as follows: | Property | description | |-----|-----|  
 ---| | file | The name of the file | | type | The type of file (png, svg, and so on) | | url | Whether to link the image to a URL | | alt | Alternative image text for accessibility and SEO | | caption | A caption for the image | All properties are optional except for `file`` and `type``. Store images in the `images` folder in your Jekyll project. Also upload the images to Media Central. Note that all images in Media Central must be available at the path as defined in the `image_path`` property in the `confighippo.yml` file. Media Central will cache images you upload and expire the cache on an `hourly`` basis.

## Inline Images For inline images, such as with a button that you want to appear inline with text, use the `inline_image.html` include, like this: ```liquid Click the Android SDK Manager button {% include inline_image.html file="androidsdkmanagericon" type="png" alt="SDK button" %} ``` Click the **Android SDK Manager** button SDK button

The `inline_image.html` include properties are as follows: | Property | description | |-----|-----| | file | The name of the file | | type | The type of file (png, svg, and so on) | | alt | Alternative image text for accessibility and SEO |

## Bold, Italics You can make content **bold** with two asterisks (`bold`), or *italics* with one asterisk (`italics`). ## Content Re-use To re-use content: 1. Create either an HTML or Markdown file and store it in the `_includes` folder. For example, `myfile.md`. The `myfile.md` file simply says: ``This is a sample include.`` 2. In the page where you want to insert the content, include the file: ``` {% include myfile.md %} ``` ## Variables To use a variable, add the property to both the `confighippo.yml` and `configjekyll.yml` files, like this: ```yaml myvariable: ACME ``` Then reference the property through the `site`` namespace: ```liquid {{site.myvariable}} ``` **Result:** All properties in your configuration files are available through the `site`` namespace.

(Note that if you add values to your configuration files -- confighippo.yml or configjekyll.yml -- you must restart Jekyll for the changes to take effect.) All properties in the page's frontmatter are available through the `page` namespace.

**## Landing Page Banners** If you want to include a banner on a landing page for the local Jekyll site, similar to the [Fire TV landing page](https://developer.amazon.com/public/solutions/devices/fire-tv), put the following `banner` properties in your page's frontmatter: 

```
`` yml --- title: Amazon Fire TV — Tiny Box, Huge Performance sidebar: firetvsidebar banner: true banner_image: firetvlanding.png banner_title: Amazon Fire TV banner_subtitle: Reach new audiences by bringing your apps and games to the living room --- ``
```

The page layout detects the `banner: true` property and then uses a `banner.html` include to insert the other banner properties. When you publish this same page on Hippo, you'll have to insert these values into the appropriate Hippo fields manually. This banner technique is used for the Jekyll publishing target only.

**## Publish your Jekyll Site on Corp Drive for Preview** When you're ready to share your content with SMEs or others to look over, first publish your Jekyll site using the Jekyll build. Then drag the build from the `\_site` folder into Corp Drive using your Chrome browser. See [publish the site on Drive Corp](https://w.amazon.com/index.php/DeveloperCommunications#Publishing\_to\_Amazon\_Corp\_Drive) for more details. You could also put the content behind a Weblab on Hippo, but you'd have to create new Hippo pages.

**## Publish Your Jekyll Site on AWS S3** For information on publishing your Jekyll site on AWS S3, see [Publishing to AWS S3](https://w.amazon.com/index.php/DeveloperCommunications/Publishing\_to\_AWS\_S3).

**## Publish Your Jekyll Site on Hippo** If you haven't [uploaded your sidebars into Media Central](#uploadsidebarsmediacentral), do this first. When you're ready to publish your pages on Hippo, first build the Hippo target (`.hippo.sh`) Then grab the content from the `**\_site**` folder, where the output builds. Unfortunately, you have to copy and paste the output in your Hippo destination folder file by file into Hippo pages. There is no bulk upload or import process. However, you merely open the file, select all, copy it, and paste it. There's no need to paste the content into different Hippo sections. As you publish content in Hippo, keep the following in mind:

- Paste all the content into the first "Compound Tech Section" box.
- The title for the first "Compound Tech Section" box can be anything (e.g., "Overview"). The JS scripts actually overwrite this box title.
- You have to custom write the title and any keywords using the Hippo form fields.
- Select the **Hide right menu** check box.

To set up a Weblab on Hippo, see [Creating a Weblab for Documentation]. Hopefully when we get rid of Hippo, we can publish the Jekyll site by using a simple command to upload the content to AWS S3 and Aperture's scripts will grab the body content and push it into the Developer Portal. However, Aperture's timeline for implementing this isn't until late summer. [Creating a Weblab for Documentation]: DeveloperCommunications/Creating\_a\_Weblab\_for\_Documentation "wikilink"

✔ **Tip:** Before you publish to Hippo, make sure you [upload your hippo sidebars \(page 0\)](#) into Media Central.

## Troubleshooting Common errors to check for: \* Make sure you add `{% include links.html %}` at the bottom of each page. \* Make sure your page's frontmatter has a `sidebar` property. \* Make sure your sidebars are listed in both config files. \* Make sure any opening `{%}` tag has a closing end tag as well. ## Learn More You can learn more about Jekyll generally here: [jekyllrb.com](https://jekyllrb.com/docs/home/). The Jekyll theme is a spinoff of the Jekyll theme I developed [here](http://idrathbewriting.com/documentation-theme-jekyll/). Some things are the same, and some are different. To learn more about for loops, if statements, and more, read up on [Liquid from Shopify](https://help.shopify.com/themes/liquid/basics). [news]: /news.html [mydoc\_introduction]: /mydoc\_introduction.html [p1\_landing\_page]: /p1\_landing\_page.html [p2\_landing\_page]: /p2\_landing\_page.html [titlepage]: /titlepage.html [tocpage]: /tocpage.html [home]: /home.html [mydoc\_release\_notes\_50]: /mydoc\_release\_notes\_50.html [mydoc\_sample\_formatting]: /mydoc\_sample\_formatting.html [mydoc\_introduction]: /mydoc\_introduction.html [mydoc\_supported\_features]: /mydoc\_supported\_features.html [mydoc\_about]: /mydoc\_about.html [mydoc\_support]: /mydoc\_support.html [mydoc\_about\_ruby\_gems\_etc]: /mydoc\_about\_ruby\_gems\_etc.html [mydoc\_install\_jekyll\_on\_mac]: /mydoc\_install\_jekyll\_on\_mac.html [mydoc\_install\_jekyll\_on\_windows]: /mydoc\_install\_jekyll\_on\_windows.html [mydoc\_pages]: /mydoc\_pages.html [mydoc\_posts]: /mydoc\_posts.html [mydoc\_conditional\_logic]: /mydoc\_conditional\_logic.html [mydoc\_content\_reuse]: /mydoc\_content\_reuse.html [mydoc\_collections]: /mydoc\_collections.html [mydoc\_sidebar\_navigation]: /mydoc\_sidebar\_navigation.html [mydoc\_yaml\_tutorial]: /mydoc\_yaml\_tutorial.html [mydoc\_tags]: /mydoc\_tags.html [mydoc\_series]: /mydoc\_series.html [mydoc\_adding\_tooltips]: /mydoc\_adding\_tooltips.html [mydoc\_alerts]: /mydoc\_alerts.html [mydoc\_icons]: /mydoc\_icons.html [mydoc\_images]: /mydoc\_images.html [mydoc\_labels]: /mydoc\_labels.html [mydoc\_hyperlinks]: /mydoc\_hyperlinks.html [mydoc\_navtabs]: /mydoc\_navtabs.html [mydoc\_tables]: /mydoc\_tables.html [mydoc\_syntax\_highlighting]: /mydoc\_syntax\_highlighting.html [mydoc\_commenting\_on\_files]: /mydoc\_commenting\_on\_files.html [mydoc\_build\_arguments]: /mydoc\_build\_arguments.html [mydoc\_themes]: /mydoc\_themes.html [mydoc\_title\_checker]: /mydoc\_title\_checker.html [mydoc\_generating\_pdfs]: /mydoc\_generating\_pdfs.html [mydoc\_help\_api]: /mydoc\_help\_api.html [mydoc\_search\_configuration]: /mydoc\_search\_configuration.html [mydoc\_iterm\_profiles]: /mydoc\_iterm\_profiles.html [mydoc\_push\_build\_to\_server]: /mydoc\_push\_build\_to\_server.html [mydoc\_no\_password\_prompts\_scp]: /mydoc\_no\_password\_prompts\_scp.html [mydoc\_publishing\_github\_pages]:

/mydoc\_publishing\_github\_pages.html [mydoc\_kb\_layout]:  
/mydoc\_kb\_layout.html [mydoc\_glossary]: /mydoc\_glossary.html  
[mydoc\_faq\_layout]: /mydoc\_faq\_layout.html [mydoc\_troubleshooting]:  
/mydoc\_troubleshooting.html [mydoc\_tag\_archives\_overview]:  
/mydoc\_tag\_archives\_overview.html [tag\_formatting]: /tag\_formatting.html  
[tag\_navigation]: /tag\_navigation.html [tag\_content\_types]:  
/tag\_content\_types.html [tag\_publishing]: /tag\_publishing.html  
[tag\_special\_layouts]: /tag\_special\_layouts.html [tag\_collaboration]:  
/tag\_collaboration.html [tag\_troubleshooting]: /tag\_troubleshooting.html  
[mydoc\_hyperlinks.html#managed-links]: /mydoc\_hyperlinks.html#managed-  
links.html [index.html#variable-includes]: /index.html#variable-includes.html  
[index.html#htmltables]: /index.html#htmltables.html [index.html#someIdTag]:  
/index.html#someIdTag.html [titlepage]: /titlepage.html [tocpage]: /tocpage.html  
[p1\_landing\_page]: /p1\_landing\_page.html [p1\_sample1]: /p1\_sample1.html  
[p1\_sample2]: /p1\_sample2.html [p1\_sample3]: /p1\_sample3.html [p1\_sample4]:  
/p1\_sample4.html [p1\_sample5]: /p1\_sample5.html [p1\_sample6]:  
/p1\_sample6.html [p1\_sample7]: /p1\_sample7.html [titlepage]: titlepage.html  
[tocpage]: tocpage.html [p2\_landing\_page]: /p2\_landing\_page.html [p2\_sample1]:  
/p2\_sample1.html [p2\_sample2]: /p2\_sample2.html [p2\_sample3]:  
/p2\_sample3.html [p2\_sample4]: /p2\_sample4.html [p2\_sample5]:  
/p2\_sample5.html [p2\_sample6]: /p2\_sample6.html [p2\_sample7]:  
/p2\_sample7.html [p2\_sample8]: /p2\_sample8.html [p2\_sample9]:  
/p2\_sample9.html [p2\_sample10]: /p2\_sample10.html [p2\_sample11]:  
/p2\_sample11.html [p2\_sample12]: /p2\_sample12.html [p2\_sample13]:  
/p2\_sample13.html [p2\_sample14]: /p2\_sample14.html [news]: /news.html  
[mydoc\_introduction]: /mydoc\_introduction.html [p1\_landing\_page]:  
/p1\_landing\_page.html [p2\_landing\_page]: /p2\_landing\_page.html

# Introduction

## Overview

This site provides documentation, training, and other notes for the Jekyll Documentation theme. There's a lot of information about how to do a variety of things here, and it's not all unique to this theme. But by and large, understanding how to do things in Jekyll depends on how your theme is coded. As a result, these additional details are provided.

The instructions here are geared towards technical writers working on documentation. You may have a team of one or more technical writers working on documentation for multiple projects. You can use this same theme to author all of your documentation for each of your products. The theme is built to accommodate documentation for multiple products on the same site.

## Survey of features

Some of the more prominent features of this theme include the following:

- Bootstrap framework
- [Navgoco multi-level sidebar](http://www.komposta.net/article/navgoco) (<http://www.komposta.net/article/navgoco>) for table of contents
- Ability to specify different sidebars for different products
- Top navigation bar with drop-down menus
- Notes, tips, and warning information notes
- Tags for alternative navigation
- Advanced landing page layouts from the [Modern Business theme](http://startbootstrap.com/template-overviews/modern-business/) (<http://startbootstrap.com/template-overviews/modern-business/>).

## Getting started

To get started, see [Getting Started \(page 0\)](#).

## Supported features

**Summary:** If you're not sure whether Jekyll and this theme will support your requirements, this list provides a semi-comprehensive overview of available features.

Before you get into exploring Jekyll as a potential platform for help content, you may be wondering if it supports some basic features needed to fulfill your tech doc requirements. The following table shows what is supported in Jekyll and this theme.

### Supported features

| Features          | Supported | Notes                                                                                                                                                                                                                                                                                         |
|-------------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Content re-use    | Yes       | Supports re-use through Liquid. You can re-use variables, snippets of code, entire pages, and more. In DITA speak, this includes conref and keyref.                                                                                                                                           |
| Markdown          | Yes       | You can author content using Markdown syntax. This is a wiki-like syntax for HTML that you can probably pick up in 10 minutes. Where Markdown falls short, you can use HTML. Where HTML falls short, you use Liquid, which is a scripting that allows you to incorporate more advanced logic. |
| Responsive design | Yes       | Uses Bootstrap framework for responsive design.                                                                                                                                                                                                                                               |
| Translation       | Yes       | I haven't done a translation project yet (just a pilot test). Here's the basic approach: Export the HTML pages and send them to a translation agency. Then create a new project for that language and insert the translated pages. Everything will be translated.                             |

| Features                 | Supported | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Collaboration            | Yes       | You collaborate with Jekyll projects the same way that developers collaborate with software projects. (You don't need a CMS.) Because you're working with text file formats, you can use any version control software (Git, Mercurial, Perforce, Bitbucket, etc.) as a CMS for your files.                                                                                                                                              |
| Scalability              | Yes       | Your site can scale to any size. It's up to you to determine how you will design the information architecture for your thousands of pages. You can choose what you display at first, second, third, fourth, and more levels, etc. Note that when your project has thousands of pages, the build time will be longer (maybe 1 minute per thousand pages?). It really depends on how many for loops you have iterating through the pages. |
| Lightweight architecture | Yes       | You don't need a LAMP stack (Linux, Apache, MySQL, PHP) architecture to get your site running. All of the building is done on your own machine, and you then push the static HTML files onto a server.                                                                                                                                                                                                                                  |
| Skinnability             | Yes       | You can skin your Jekyll site to look identical to pretty much any other site online. If you have a UX team, they can really skin and design the site using all the tools familiar to the modern designer – JavaScript, HTML5, CSS, jQuery, and more. Jekyll is built on the modern web development stack rather than the XML stack (XSLT, XPath, XQuery).                                                                              |
| Support                  | Yes       | The community for your Jekyll site isn't so much other tech writers (as is the case with DITA) but rather the wider web development community. <a href="http://talk.jekyllrb.com">Jekyll Talk</a> ( <a href="http://talk.jekyllrb.com">http://talk.jekyllrb.com</a> ) is a great resource. So is Stack Overflow.                                                                                                                        |

| Features              | Supported | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Blogging features     | Yes       | There is a simple blogging feature. This appears as “news” and is intended to promote news that applies across products.                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Versioning            | Yes       | Jekyll doesn’t version your files. You upload your files to a version control system such as Github. Your files are versioned there.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| PC platform           | Yes       | Jekyll runs on Windows. Although the experience working on the command line is better on a Mac, Windows also works, especially now that Jekyll 3.0 dropped dependencies on Python, which wasn’t available by default on Windows.                                                                                                                                                                                                                                                                                                                                     |
| jQuery plugins        | Yes       | You can use any jQuery plugins you and other JavaScript, CMS, or templating tools. However, note that if you use Ruby plugins, you can’t directly host the source files on Github Pages because Github Pages doesn’t allow Ruby plugins. Instead, you can just push your output to any web server. If you’re not planning to use Github Pages, there are no restrictions on any plugins of any sort. Jekyll makes it super easy to integrate every kind of plugin imaginable. This theme doesn’t actually use any plugins, so you can publish on Github if you want. |
| Bootstrap integration | Yes       | This theme is built on <a href="http://getbootstrap.com/">Bootstrap</a> ( <a href="http://getbootstrap.com/">http://getbootstrap.com/</a> ). If you don’t know what Bootstrap is, basically this means there are hundreds of pre-built components, styles, and other elements that you can simply drop into your site. For example, the responsive quality of the site comes about from the Bootstrap code base.                                                                                                                                                     |

| Features           | Supported | Notes                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fast-loading pages | Yes       | This is one of the Jekyll's strengths. Because the files are static, they loading extremely fast, approximately 0.5 seconds per page. You can't beat this for performance. (A typically database-driven site like WordPress averages about 2.5 + seconds loading time per page.) Because the pages are all static, it means they are also extremely secure. You won't get hacked like you might with a WordPress site. |
| Themes             | Yes       | You can have different themes for different outputs. If you know CSS, theming both the web and print outputs is pretty easy.                                                                                                                                                                                                                                                                                           |
| Open source        | Yes       | This theme is entirely open source. Every piece of code is open, viewable, and editable. Note that this openness comes at a price — it's easy to make changes that break the theme or otherwise cause errors.                                                                                                                                                                                                          |

## Features not available

The following features are not available.

| Features      | Supported | Notes                                                                                                                                                                                                                                                                                 |
|---------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CMS interface | No        | Unlike with WordPress, you don't log into an interface and navigate to your files. You work with text files and preview the site dynamically in your browser. Don't worry — this is part of the simplicity that makes Jekyll awesome. I recommend using WebStorm as your text editor. |

| Features                 | Supported | Notes                                                                                                                                                                                                         |
|--------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WYSIWYG interface        | No        | I use WebStorm to author content, because I like working in text file formats. But you can use any Markdown editor you want (e.g., Lightpaper for Mac, Marked) to author your content.                        |
| Different outputs        | No        | This theme provides a single website output that contains documentation for multiple products. Unlike previous iterations of the theme, it's not intended to support different outputs from the same content. |
| Robust search            | No        | The search feature is a simplistic JSON search. For more robust search, you should integrate Swiftype or Algolia. However, those services aren't currently integrated into the theme.                         |
| Standardized templates   | No        | You can create pages with any structure you want. The theme does not enforce topic types such as a task or concept as the DITA specification does.                                                            |
| Integration with Swagger | No        | You can link to a SwaggerUI output, but there is no built-in integration of SwaggerUI into this documentation theme.                                                                                          |
| Templates for endpoints  | No        | Although static site generators work well with API documentation, there aren't any built-in templates specific to endpoints in this theme. You could construct your own, though.                              |
| eBook output             | No        | There isn't an eBook output for the content.                                                                                                                                                                  |

## About the theme author

**Summary:** I have used this theme for projects that I've worked on as a professional technical writer.

My name is Tom Johnson, and I'm a technical writer, blogger, and podcaster based in San Jose, California. My blog is here: <http://idratherbewriting.com> (<http://idratherbewriting.com>). I write several posts there a week. See [my blog's about page](http://idratherbewriting.com/aboutme/) (<http://idratherbewriting.com/aboutme/>) for more details about me.

I have used this theme and variations of it for various documentation projects. This theme has undergone several major iterations, and now it's fairly stable and full of all the features that I need. You are welcome to use it for your documentation projects for free.

I think this theme does pretty much everything that you can do with something like OxygenXML, but without the constraints of structured authoring. Everything is completely open and changeable, so if you start tinkering around with the theme's files, you can break things. But it's completely empowering as well!

With a completely open architecture and code base, you can modify the code to make it do exactly what you want, without having to jump through all kinds of confusing or proprietary code.

If there's a feature you need but it isn't available here, let me know and I might add it. Alternatively, if you fork the theme, I would love to see your modifications and enhancements.

## Support

**Summary:** Contact me for any support issues.

Let me know about any bugs or other issues that you find. Just email me at [tomjohnson1492@gmail.com](mailto:tomjohnson1492@gmail.com). You can also [create issues directly within the Github repository here \(https://github.com/tomjohnson1492/jekyll-doc/issues\)](https://github.com/tomjohnson1492/jekyll-doc/issues).

# About Ruby, Gems, Bundler, and other prerequisites

**Summary:** Ruby is a programming language you must have on your computer in order to build Jekyll locally. Ruby has various gems (or plugins) that provide various functionality. Each Jekyll project usually requires certain gems.

## About Ruby

Jekyll runs on Ruby, a programming language. You have to have Ruby on your computer in order to run Ruby-based programs like Jekyll. Ruby is installed on the Mac by default, but you must add it to Windows.

## About Ruby Gems

Ruby has a number of plugins referred to as “gems.” Just because you have Ruby doesn’t mean you have all the necessary Ruby gems that your program needs to run. Gems provide additional functionality for Ruby programs. There are thousands of [Rubygems](https://rubygems.org/) (<https://rubygems.org/>) available for you to use.

Some gems depend on other gems for functionality. For example, the Jekyll gem might depend on 20 other gems that must also be installed.

Each gem has a version associated with it, and not all gem versions are compatible with each other.

## Rubygem package managers

[Bundler](http://bundler.io/) (<http://bundler.io/>) is a gem package manager for Ruby, which means it goes out and gets all the gems you need for your Ruby programs. If you tell Bundler you need the [jekyll gem](https://rubygems.org/gems/jekyll) (<https://rubygems.org/gems/jekyll>), it will retrieve all the dependencies on the jekyll gem as well – automatically.

Not only does Bundler retrieve the right gem dependencies, but it’s smart enough to retrieve the right versions of each gem. For example, if you get the [github-pages](https://rubygems.org/gems/github-pages) (<https://rubygems.org/gems/github-pages>) gem, it will retrieve all of these other gems:

```
github-pages-health-check = 1.1.0
jekyll = 3.0.3
jekyll-coffeescript = 1.0.1
jekyll-feed = 0.4.0
jekyll-gist = 1.4.0
jekyll-github-metadata = 1.9.0
jekyll-mentions = 1.1.2
jekyll-paginate = 1.1.0
jekyll-redirect-from = 0.10.0
jekyll-sass-converter = 1.3.0
jekyll-seo-tag = 1.3.2
jekyll-sitemap = 0.10.0
jekyll-textile-converter = 0.1.0
jemoji = 0.6.2
kramdown = 1.10.0
liquid = 3.0.6
mercenary ~> 0.3
rdiscount = 2.1.8
redcarpet = 3.3.3
RedCloth = 4.2.9
rouge = 1.10.1
terminal-table ~> 1.
```

See how Bundler retrieved version 3.0.3 of the jekyll gem, even though (as of this writing) the latest version of the jekyll gem is 3.1.2? That's because github-pages is only compatible up to jekyll 3.0.3. Bundler handles all of this dependency and version compatibility for you.

Trying to keep track of which gems and versions are appropriate for your project can be a nightmare. This is the problem Bundler solves. As explained on [Bundler.io \(http://bundler.io\)](http://bundler.io):

Bundler provides a consistent environment for Ruby projects by tracking and installing the exact gems and versions that are needed.

Bundler is an exit from dependency hell, and ensures that the gems you need are present in development, staging, and production. Starting work on a project is as simple as `bundle install`.

## Gemfiles

Bundler looks in a project's "Gemfile" (no file extension) to see which gems are required by the project. The Gemfile lists the source and then any gems, like this:

```
source "https://rubygems.org"

gem 'github-pages'
gem 'jekyll'
```

The source indicates the site where Bundler will retrieve the gems:  
<https://rubygems.org> (<https://rubygems.org>).

The gems it retrieves are listed separately on each line.

Here no versions are specified. Sometimes gemfiles will specify the versions like this:

```
gem 'kramdown', '1.0'
```

This means Bundler should get version 1.0 of the kramdown gem.

To specify a subset of versions, the Gemfile looks like this:

```
gem 'jekyll', '~> 2.3'
```

The `~>` sign means greater than or equal to the *last digit before the last period in the number*.

Here it will get any gem equal to 2.3 but less than 3.0.

If it adds another digit, the scope is affected:

```
gem `jekyll`, `~>2.3.1'
```

This means to get any gem equal to 2.3.1 but less than 2.4.

If it looks like this:

```
gem 'jekyll', '~> 3.0', '>= 3.0.3'
```

This will get any Jekyll gem between versions 3.0 and up to 3.0.3.

See this [Stack Overflow post](#)

(<http://stackoverflow.com/questions/5170547/what-does-tilde-greater-than-mean-in-ruby-gem-dependencies>)

for more details.

## Gemfile.lock

After Bundler retrieves and installs the gems, it makes a detailed list of all the gems and versions it has installed for your project. The snapshot of all gems + versions installed is stored in your Gemfile.lock file, which might look like this:

**GEM**

```
remote: https://rubygems.org/
specs:
  RedCloth (4.2.9)
  activesupport (4.2.5.1)
    i18n (~> 0.7)
    json (~> 1.7, >= 1.7.7)
    minitest (~> 5.1)
    thread_safe (~> 0.3, >= 0.3.4)
    tzinfo (~> 1.1)
  addressable (2.3.8)
  coffee-script (2.4.1)
    coffee-script-source
    execjs
  coffee-script-source (1.10.0)
  colorator (0.1)
  ethon (0.8.1)
    ffi (>= 1.3.0)
  execjs (2.6.0)
  faraday (0.9.2)
    multipart-post (>= 1.2, < 3)
  ffi (1.9.10)
  gemoji (2.1.0)
  github-pages (52)
    RedCloth (= 4.2.9)
    github-pages-health-check (= 1.0.1)
    jekyll (= 3.0.3)
    jekyll-coffeescript (= 1.0.1)
    jekyll-feed (= 0.4.0)
    jekyll-gist (= 1.4.0)
    jekyll-mentions (= 1.0.1)
    jekyll-paginate (= 1.1.0)
    jekyll-redirect-from (= 0.9.1)
    jekyll-sass-converter (= 1.3.0)
    jekyll-seo-tag (= 1.3.1)
    jekyll-sitemap (= 0.10.0)
    jekyll-textile-converter (= 0.1.0)
    jemoji (= 0.5.1)
    kramdown (= 1.9.0)
    liquid (= 3.0.6)
    mercenary (~> 0.3)
    rdiscount (= 2.1.8)
    redcarpet (= 3.3.3)
    rouge (= 1.10.1)
    terminal-table (~> 1.4)
  github-pages-health-check (1.0.1)
  addressable (~> 2.3)
```

```
net-dns (~> 0.8)
octokit (~> 4.0)
public_suffix (~> 1.4)
typhoeus (~> 0.7)
html-pipeline (2.3.0)
  activesupport (>= 2, < 5)
  nokogiri (>= 1.4)
i18n (0.7.0)
jekyll (3.0.3)
  colorator (~> 0.1)
  jekyll-sass-converter (~> 1.0)
  jekyll-watch (~> 1.1)
  kramdown (~> 1.3)
  liquid (~> 3.0)
  mercenary (~> 0.3.3)
  rouge (~> 1.7)
  safe_yaml (~> 1.0)
jekyll-coffeescript (1.0.1)
  coffee-script (~> 2.2)
jekyll-feed (0.4.0)
jekyll-gist (1.4.0)
  octokit (~> 4.2)
jekyll-mentions (1.0.1)
  html-pipeline (~> 2.3)
  jekyll (~> 3.0)
jekyll-paginate (1.1.0)
jekyll-redirect-from (0.9.1)
  jekyll (>= 2.0)
jekyll-sass-converter (1.3.0)
  sass (~> 3.2)
jekyll-seo-tag (1.3.1)
  jekyll (~> 3.0)
jekyll-sitemap (0.10.0)
jekyll-textile-converter (0.1.0)
  RedCloth (~> 4.0)
jekyll-watch (1.3.1)
  listen (~> 3.0)
jemoji (0.5.1)
  gemoji (~> 2.0)
  html-pipeline (~> 2.2)
  jekyll (>= 2.0)
json (1.8.3)
kramdown (1.9.0)
liquid (3.0.6)
listen (3.0.6)
  rb-fsevent (>= 0.9.3)
  rb-inotify (>= 0.9.7)
```

```
mercenary (0.3.5)
mini_portile2 (2.0.0)
minitest (5.8.4)
multipart-post (2.0.0)
net-dns (0.8.0)
nokogiri (1.6.7.2)
  mini_portile2 (~> 2.0.0.rc2)
octokit (4.2.0)
  sawyer (~> 0.6.0, >= 0.5.3)
public_suffix (1.5.3)
rb-fsevent (0.9.7)
rb-inotify (0.9.7)
  ffi (>= 0.5.0)
rdiscount (2.1.8)
redcarpet (3.3.3)
rouge (1.10.1)
safe_yaml (1.0.4)
sass (3.4.21)
sawyer (0.6.0)
  addressable (~> 2.3.5)
  faraday (~> 0.8, < 0.10)
terminal-table (1.5.2)
thread_safe (0.3.5)
typhoeus (0.8.0)
  ethon (>= 0.8.0)
tzinfo (1.2.2)
  thread_safe (~> 0.1)
```

**PLATFORMS**

```
ruby
```

**DEPENDENCIES**

```
github-pages
jekyll
```

**BUNDLED WITH**

```
1.11.2
```

You can always delete the Gemlock file and run `Bundle install` again to get the latest versions. You can also run `bundle update`, which will ignore the Gemlock file to get the latest versions of each gem.

To learn more about Bundler, see [Bundler's Purpose and Rationale](http://bundler.io/rationale.html) (<http://bundler.io/rationale.html>).

## Install Jekyll on Mac

**Summary:** Installation of Jekyll on Mac is usually less problematic than on Windows. However, you may run into permissions issues with Ruby that you must overcome. You should also use Bundler to be sure that you have all the required gems and other utilities on your computer to make the project run.

### Ruby and RubyGems

Ruby and [RubyGems](https://rubygems.org/pages/download) (<https://rubygems.org/pages/download>) are usually installed by default on Macs. Open your Terminal and type which ruby and which gem to confirm that you have Ruby and Rubygems. You should get a response indicating the location of Ruby and Rubygems.

If you get responses that look like this:

```
/usr/local/bin/ruby
```

and

```
/usr/local/bin/gem
```

Great! Skip down to the [Bundler \(page 47\)](#) section.

However, if your location is something like

`/Users/MacBookPro/.rvm/rubies/ruby-2.2.1/bin/gem`, which points to your system location of Rubygems, you will likely run into permissions errors when trying to get a gem. A sample permissions error (triggered when you try to install the jekyll gem such as `gem install jekyll`) might look like this for Rubygems:

```
>ERROR: While executing gem ... (Gem::FilePermissionError)
  You don't have write permissions for the /Library/Ruby/Gems/
  2.0.0 directory.
```

Instead of changing the write permissions on your operating system's version of Ruby and Rubygems (which could pose security issues), you can install another instance of Ruby (one that is writable) to get around this.

## Install Homebrew

Homebrew is a package manager for the Mac, and you can use it to install an alternative instance of Ruby code. To install Homebrew, run this command:

```
/usr/bin/ruby -e "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/master/install)"
```

If you already had Homebrew installed on your computer, be sure to update it:

```
brew update
```

## Install Ruby through Homebrew

Now use Homebrew to install Ruby:

```
brew install ruby
```

Log out of terminal, and then then log back in.

When you type `which ruby` and `which gem`, you should get responses like this:

```
/usr/local/bin/ruby
```

And this:

```
/usr/local/bin/gem
```

Now Ruby and Rubygems are installed under your username, so these directories are writeable.

Note that if you don't see these paths, try restarting your computer or try installing rbenv, which is a Ruby version management tool. If you still have issues getting a writeable version of Ruby, you need to resolve them before installing Bundler.

## Install the Jekyll gem

At this point you should have a writeable version of Ruby and Rubygem on your machine.

Now use `gem` to install Jekyll:

```
gem install jekyll
```

You can now use Jekyll to create new Jekyll sites following the quick-start instructions on [Jekyllrb.com](http://jekyllrb.com) (<http://jekyllrb.com>).

## Installing dependencies through Bundler

Some Jekyll themes will require certain Ruby gem dependencies. These dependencies are stored in something called a Gemfile, which is packaged with the Jekyll theme. You can install these dependencies through Bundler. (Although you don't need to install Bundler for this Documentation theme, it's a good idea to do so.)

[Bundler](http://bundler.io/) (<http://bundler.io/>) is a package manager for RubyGems. You can use it to get all the gems (or Ruby plugins) that you need for your Jekyll project.

You install Bundler by using the `gem` command with RubyGems:

```
gem install bundler
```

If you're prompted to switch to superuser mode ( `sudo` ) to get the correct permissions to install Bundler in that directory, avoid doing this. All other applications that need to use Bundler will likely not have the needed permissions to run.

Bundler goes out and retrieves all the gems that are specified in a Jekyll project's Gemfile. If you have a gem that depends on other gems to work, Bundler will go out and retrieve all of the dependencies as well. (To learn more about Bundler, see [About Ruby Gems \(page 0\)](#)).

The vanilla Jekyll site you create through `jekyll new my-awesome-site` doesn't have a Gemfile, but many other themes (including the Documentation theme for Jekyll) do have a Gemfile.

## Serve the Jekyll Documentation theme

1. Browse to the directory where you downloaded the Documentation theme for Jekyll.
2. Type `jekyll serve`
3. Go to the preview address in the browser. (Make sure you include the `/` at the end.)

## Install Jekyll on Windows

✓ **Tip:** For a better terminal emulator on Windows, use [Git Bash](https://git-for-windows.github.io/) (<https://git-for-windows.github.io/>). Git Bash gives you Linux-like control on Windows.

### Install Ruby

First you must install Ruby because Jekyll is a Ruby-based program and needs Ruby to run.

1. Go to [RubyInstaller for Windows](http://rubyinstaller.org/downloads/) (<http://rubyinstaller.org/downloads/>).
2. Under **RubyInstallers**, download and install one of the Ruby installers (usually one of the first two options).
3. Double-click the downloaded file and proceed through the wizard to install it.

### Install Ruby Development Kit

Some extensions Jekyll uses require you to natively build the code using the Ruby Development Kit.

1. Go to [RubyInstaller for Windows](http://rubyinstaller.org/downloads/) (<http://rubyinstaller.org/downloads/>).
2. Under the **Development Kit** section near the bottom, download one of the **For use with Ruby 2.0 and above...** options (either the 32-bit or 64-bit version).
3. Move your downloaded file onto your **C** drive in a folder called something like **RubyDevKit**.
4. Extract the compressed folder's contents into the folder.
5. Browse to the **RubyDevKit** location on your C drive using your Command Line Prompt.

To see the contents of your current directory, type `dir` . To move into a directory, type `cd foldername` , where “foldername” is the name of the folder you want to enter. To move up a directory, type `cd ../` one or

more times depending on how many levels you want to move up. To move into your user's directory, type `/users` . The `/` at the beginning of the path automatically starts you at the root.

6. Type `ruby dk.rb init`
7. Type `ruby dk.rb install`

If you get stuck, see the [official instructions for installing Ruby Dev Kit](https://github.com/oneclick/rubyinstaller/wiki/Development-Kit) (<https://github.com/oneclick/rubyinstaller/wiki/Development-Kit>).

## Install the Jekyll gem

At this point you should have Ruby and Rubygem on your machine.

Now use `gem` to install Jekyll:

```
gem install jekyll
```

You can now use Jekyll to create new Jekyll sites following the quick-start instructions on [Jekyllrb.com](http://jekyllrb.com) (<http://jekyllrb.com>).

## Installing dependencies through Bundler

Some Jekyll themes will require certain Ruby gem dependencies. These dependencies are stored in something called a Gemfile, which is packaged with the Jekyll theme. You can install these dependencies through Bundler. (Although you don't need to install Bundler for this Documentation theme, it's a good idea to do so.)

[Bundler](http://bundler.io/) (<http://bundler.io/>) is a package manager for RubyGems. You can use it to get all the gems (or Ruby plugins) that you need for your Jekyll project.

You install Bundler by using the `gem` command with RubyGems:

## Install Bundler

1. Install Bundler: `gem install bundler`
2. Initialize Bundler: `bundle init`  
This will create a new Gemfile.
3. Open the Gemfile in a text editor.

Typically you can open files from the Command Prompt by just typing the filename, but because Gemfile doesn't have a file extension, no program will automatically open it. You may need to use your File Explorer and browse to the directory, and then open the Gemfile in a text editor such as Notepad.

4. Remove the existing contents. Then paste in the following:

```
source "https://rubygems.org"

gem 'wdm'
gem 'jekyll'
```

The [wdm gem](https://rubygems.org/gems/wdm/versions/0.1.1) (<https://rubygems.org/gems/wdm/versions/0.1.1>) allows for the polling of the directory and rebuilding of the Jekyll site when you make changes. This gem is needed for Windows users, not Mac users.

5. Save and close the file.
6. Type `bundle install`.

Bundle retrieves all the needed gems and gem dependencies and downloads them to your computer. At this time, Bundle also takes a snapshot of all the gems used in your project and creates a Gemfile.lock file to store this information.

## Serve the Jekyll Documentation theme

1. Browse to the directory where you downloaded the Documentation theme for Jekyll.
2. Type `jekyll serve`
3. Go to the preview address in the browser. (Make sure you include the `/` at the end.)

Unfortunately, the Command Prompt doesn't allow you to easily copy and paste the URL, so you'll have to type it manually.

## Pages

**Summary:** This theme primarily uses pages. You need to make sure your pages have the appropriate frontmatter. One frontmatter tag your users might find helpful is the summary tag. This functions similar in purpose to the shortdesc element in DITA.

## Where to author content

Use a text editor such as Sublime Text, WebStorm, IntelliJ, or Atom to create pages.

My preference is IntelliJ/WebStorm, since it will treat all files in your theme as belonging to a project. This allows you to easily search for instances of keywords, do find-and-replace operations, or do other actions that apply across the whole project.

## Page names and excluding files from outputs

By default, everything in your project is included in the output. You can exclude all files that don't belong to that project by specifying the file name, the folder name, or by using wildcards in your configuration file:

exclude:

- filename.md
- subfolder\_name/
- mydoc\_\*

These wildcards will exclude every match after the \* .

## Frontmatter

Make sure each page has frontmatter at the top like this:

```

---
title: Alerts
tags: [formatting]
keywords: notes, tips, cautions, warnings, admonitions
last_updated: July 3, 2016
summary: "You can insert notes, tips, warnings, and important a
lerts in your content. These notes are stored as shortcodes mad
e available through the linksrefs.html include."
sidebar: mydoc_sidebar
permalink: mydoc_alerts/
---

```

Frontmatter is always formatted with three hyphens at the top and bottom. Your frontmatter must have a `title` value. All the other values are optional. If you omit them, the theme won't break.

Note that you cannot use variables in frontmatter.

The following table describes each of the frontmatter that you can use with this theme:

| Frontmatter                   | Required? | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>**title**</code>        | Required  | The title for the page                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <code>**tags**</code>         | Optional  | Tags for the page. Make all tags single words, with underscores if needed (rather than spaces). Separate them with commas. Enclose the whole list within brackets. Also, note that tags must be added to <code>\_data/tags_doc.yml</code> to be allowed entrance into the page. This prevents tags from becoming somewhat random and unstructured. You must create a tag page for each one of your tags following the pattern shown in the <code>tags</code> folder. (Tag pages aren't automatically created.) |
| <code>**keywords**</code>     | Optional  | Synonyms and other keywords for the page. This information gets stuffed into the page's metadata to increase SEO. The user won't see the keywords, but if you search for one of the keywords, it will be picked up by the search engine.                                                                                                                                                                                                                                                                       |
| <code>**last_updated**</code> | Optional  | The date the page was last updated. This information could be helpful for readers trying to evaluate how current and authoritative information is. If included, the <code>last_updated</code> date appears in the footer of the page in rather small font.                                                                                                                                                                                                                                                     |
| <code>**summary**</code>      | Optional  | A 1-2 word sentence summarizing the content on the page. This gets formatted into the summary section in the page layout. Adding summaries is a key way to make yo                                                                                                                                                                                                                                                                                                                                             |

ur content more scannable by users (check out [Jakob Nielsen's site](http://www.nngroup.com/articles/corporate-blogs-front-page-structure/) for a great example of page summaries.) The only drawback with summaries is that you can't use variables in the m. |

| **\*\*permalink\*\*** | Required | This theme uses permalinks to facilitate the linking. You specify the permalink want for the page, and the `\_site` output will put the page into the root directory when you publish. The page will appear inside a folder by the same name, with the actual page being `index.html`. Browsers will automatically show the `index.html` file inside of any folder, so permalinks avoid the `.html` extension with file names. Permalink names don't have to match your file names, but it might be easier to keep them in sync. If you don't use permalinks, Jekyll automatically uses the file name and folder path as the link. |

| **\*\*datatable\*\*** | Optional | `'true'`. If you add ``datatable: true`` in the frontmatter, scripts for the [jQuery Datatables plugin](https://www.datatables.net/) get included on the page. You can see the scripts that conditionally appear by looking in the `\_layouts/default.html` page. |

| `toc` | Optional | If you specify ``toc: false`` in the frontmatter, the page won't have the table of contents that appears below the title. The `toc` refers to the list of jump links below the page title, not the sidebar navigation. You probably want to hide the TOC on the homepage and product landing pages. |

## ## Colons in page titles

If you want to use a colon in your page title, you must enclose the title's value in quotation marks.

## ## Saving pages as drafts

If you add ``published: false`` in the frontmatter, your page won't be published. You can also move draft pages into the `\_drafts` folder to exclude them from the build. With posts, you can also keep them as drafts by omitting the date in the title.

## ## Markdown or HTML format

Pages can be either Markdown or HTML format (specified through either an `.md` or `.html` file extension).

If you use Markdown, you can also include HTML formatting where needed. But not vice versa &mdash; if you use HTML (as your file extension), you can't insert Markdown content in the file.

Also, if you use HTML inside a Markdown file, you cannot use Markdown inside of HTML. But you can use HTML inside of Markdown.

For your Markdown files, note that a space or two indent will set text off as code or blocks, so avoid spacing indents unless intentional.

If you have a lot of HTML, as long as the top and bottom tags of the HTML are flush left in a Markdown file, all the tags inside those bookend HTML tags will render as HTML, regardless of their indentation.

## ## Where to save pages

You can store your pages in any folder structures you want, with any level of folder nesting. The site output will pull all of those pages out of their folders and put them into the root directory. Check out the `\_site` folder, which is where Jekyll is generated, to see the difference between your project's structure and the resulting site output.

## ## Page names

I recommend prefixing your page names with the product, such as `"mydoc_pages"` instead of just `"pages."` This way if you have other products that also have topics with generic names such as `"pages,"` there won't be naming conflicts.

Additionally, consider adding the product name in parentheses after the title, such as `"Pages (Mydoc)"` so that users can clearly navigate different topics for each product.

## ## Kramdown Markdown

Kramdown is the Markdown flavor used in the theme. This mostly aligns with Github-flavored Markdown, but with some differences in the indentation allowed within lists. Basically, Kramdown requires you to line up the indent between list items with the first starting character after the space in your list item numbering. See this [blog post on Kramdown and Rouge](<http://idratherbewriting.com/2016/02/21/bug-with-kramdown-and-rouge-with-github-pages/>) for more details.

You can use standard Multimarkdown syntax for tables. You can also use fenced code blocks with lexers specifying the type of code. The configuration file shows the Markdown processor and ex

```
tensiosn:  
  
``yaml  
highlighter: rouge  
markdown: kramdown  
kramdown:  
  input: GFM  
  auto_ids: true  
  hard_wrap: false  
  syntax_highlighter: rouge
```

## Automatic mini-TOCs

By default, a TOC appears at the top of your pages and posts. If you don't want the TOC to appear for a specific page, such as for a landing page or other homepage, add `toc: false` in the frontmatter of the page.

The mini-TOC requires you to use the `##` Markdown syntax for headings. If you use `<h2>` elements, you must add an ID attribute for the heading element in order for it to appear in the mini-TOC (for example, `<h2 id="mysampleid">Heading</h2>`).

## Specify a particular page layout

The configuration file sets the default layout for pages as the “page” layout.

You can create other layouts inside the `layouts` folder. If you create a new layout, you can specify that your page use your new layout by adding

`layout: mylayout.html` in the page's frontmatter. Whatever layout you specify in the frontmatter of a page will override the layout default set in the configuration file.

## Comments

Disqus, a commenting system, is integrated into the theme. In the configuration file, specify the Disqus code for the universal code, and Disqus will appear. If you don't add a Disqus value, the Disqus form isn't included.

## Custom keyboard shortcuts

Some of the Jekyll syntax can be slow to create. Using a utility such as [aText](https://www.trankynam.com/atext/) (<https://www.trankynam.com/atext/>) can make creating content a lot of faster.

For example, with my aText configuration, when I type `jlink`, aText replaces it with `<a href="{ "/page" | prepend: site.baseurl }">page</a>`.

You get aText from the App Store on a Mac for about \$5. However, the Mac Store version of aText won't work on Mac OSX El Capitan due to sandbox security restrictions, so you need to download the app outside of the App Store to make it work.

There are alternatives to aText, such as Typeitforme. But aText seems to work the best. You can read more about aText on [Lifehacker](http://lifehacker.com/5843903/the-best-text-expansion-app-for-mac) (<http://lifehacker.com/5843903/the-best-text-expansion-app-for-mac>).

## Posts

**Summary:** You can use posts when you want to create blogs or news type of content.

### About posts

Posts are typically used for blogs or other news information because they contain a date and are sorted in reverse chronological order.

You create a post by adding a file in the `_posts` folder that is named `yyyy-mm-dddd-permalink.md`, which might be `2016-02-25-my-latest-updates.md`. You can use any number of subfolders here that you want.

Posts use the `post.html` layout in the `_layouts` folder when you are viewing the post.

The `news.html` file in the root directory shows a reverse chronological listing of the 10 latest posts

### Allowed frontmatter

The frontmatter you can use with posts is as follows:

```
title: My sample post keywords: pages, authoring, exclusion, frontmatter
summary: "This is some summary frontmatter for my sample post." sidebar:
mydoc_sidebar permalink: mydoc_pages/ tags: content_types —
```

| Frontmatter  | Required? | Description            |
|--------------|-----------|------------------------|
| <b>title</b> | Required  | The title for the page |

| Frontmatter      | Required? | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>tags</b>      | Optional  | Tags for the page. Make all tags single words, with underscores if needed. Separate them with commas. Enclose the whole list within brackets. Also, note that tags must be added to <code>_data/tags_doc.yml</code> to be allowed entrance into the page. This prevents tags from becoming somewhat random and unstructured. You must create a tag page for each one of your tags following the sample pattern in the tabs folder. (Tag pages aren't automatically created.)                                                                                                                             |
| <b>keywords</b>  | Optional  | Synonyms and other keywords for the page. This information gets stuffed into the page's metadata to increase SEO. The user won't see the keywords, but if you search for one of the keywords, it will be picked up by the search engine.                                                                                                                                                                                                                                                                                                                                                                 |
| <b>summary</b>   | Optional  | A 1-2 word sentence summarizing the content on the page. This gets formatted into the summary section in the page layout. Adding summaries is a key way to make your content more scannable by users (check out <a href="http://www.nngroup.com/articles/corporate-blogs-front-page-structure/">Jakob Nielsen's site</a> ( <a href="http://www.nngroup.com/articles/corporate-blogs-front-page-structure/">http://www.nngroup.com/articles/corporate-blogs-front-page-structure/</a> ) for a great example of page summaries.) The only drawback with summaries is that you can't use variables in them. |
| <b>permalink</b> | Required  | This theme uses permalinks to facilitate the linking. You specify the permalink want for the page, and the <code>_site</code> output will put the page into the root directory when you publish. The page will appear inside a folder by the same name, with the actual page being <code>index.html</code> . Browsers will automatically show the <code>index.html</code> file inside of any folder, so permalinks avoid the <code>.html</code> extension with file names. Permalink names don't have to match your file names, but it might be easier to keep them in sync.                             |

## Conditional logic

**Summary:** You can implement advanced conditional logic that includes if statements, or statements, unless, and more. This conditional logic facilitates single sourcing scenarios in which you're outputting the same content for different audiences.

### About Liquid and conditional statements

If you want to create different outputs for different audiences, you can do all of this using a combination of Jekyll's Liquid markup and values in your configuration file. This is how I previously configured the theme. I had different configuration files for each output. Each configuration file specified different values for product, audience, version, and so on. Then I had different build processes that would leverage the different configuration files. It seemed like a perfect implementation of DITA-like techniques with Jekyll.

But I soon found that having lots of separate outputs for a project was undesirable. If you have 10 different outputs that have different nuances for different audiences, it's hard to manage and maintain. In this latest version of the theme, I consolidated all information into the same output to explicitly do away with the multi-output approach.

As such, the conditional logic won't have as much play as it previously did. Instead of conditions, you'll probably want to incorporate [navtabs \(page 114\)](#) to split up the information.

However, you can still of course use conditional logic as needed.

✔ **Tip:** Definitely check out [Liquid's documentation \(http://docs.shopify.com/themes/liquid-documentation/basics\)](#) for more details about how to use operators and other liquid markup. The notes here are a small, somewhat superficial sample from the site.

## Where to store filtering values

You can filter content based on values that you have set either in your page's frontmatter, a config file, or in a file in your `_data` folder. If you set the attribute in your config file, you need to restart the Jekyll server to see the changes. If you set the value in a file in your `_data` folder or page frontmatter, you don't need to restart the server when you make changes.

## Conditional logic based on config file value

Here's an example of conditional logic based on a value in the page's frontmatter. Suppose you have the following in your frontmatter:

```
platform: mac
```

On a page in my site (it can be HTML or markdown), you can conditionalize content using the following:

```
{% if page.platform == "mac" %}  
Here's some info about the Mac.  
{% elsif page.platform == "windows" %}  
Here's some info about Windows ...  
{% endif %}
```

This uses simple `if-elsif` logic to determine what is shown (note the spelling of `elsif`). The `else` statement handles all other conditions not handled by the `if` statements.

Here's an example of `if-else` logic inside a list:

To bake a casserole:

1. Gather the ingredients.  
{% if page.audience == "writer" %}
2. Add in a pound of meat.  
{% elsif page.audience == "designer" %}
3. Add in an extra can of beans.  
{% endif %}
3. Bake in oven for 45 min.

You don't need the `elsif` or `else`. You could just use an `if` (but be sure to close it with `endif`).

## Or operator

You can use more advanced Liquid markup for conditional logic, such as an `or` command. See [Shopify's Liquid documentation](http://docs.shopify.com/themes/liquid-documentation/basics/operators) (<http://docs.shopify.com/themes/liquid-documentation/basics/operators>) for more details.

For example, here's an example using `or` :

```
{% if page.audience contains "vegan" or page.audience == "vegetarian" %}
  Then run this...
{% endif %}
```

Note that you have to specify the full condition each time. You can't shorten the above logic to the following:

```
{% if page.audience contains "vegan" or "vegetarian" %}
  // run this.
{% endif %}
```

This won't work.

## Unless operator

You can also use `unless` in your logic, like this:

```
{% unless site.output == "pdf" %}  
...do this  
{% endunless %}
```

When figuring out this logic, read it like this: “Run the code here *unless* this condition is satisfied.””

Don’t read it the other way around or you’ll get confused. (It’s *not* executing the code only if the condition is satisfied.)

## Storing conditions in the `_data` folder

Here’s an example of using conditional logic based on a value in a data file:

```
{% if site.data.options.output == "alpha" %}  
show this content...  
{% elsif site.data.options.output == "beta" %}  
show this content...  
{% else %}  
this shows if neither of the above two if conditions are met.  
{% endif %}
```

To use this, I would need to have a `_data` folder called `options` where the `output` property is stored.

## Specifying the location for `_data`

You can also specify a `data_source` for your data location in your configuration file. Then you aren’t limited to simply using `_data` to store your data files.

For example, suppose you have 2 projects: `alpha` and `beta`. You might store all the data files for `alpha` inside `data_alpha`, and all the data files for `beta` inside `data_beta`.

In your `alpha` configuration file, specify the data source like this:

```
data_source: data_amydoc_content_reuselpha
```

Then create a folder called `_data_alpha`.

For your `beta` configuratoin file, specify the data source like this:

```
data_source: data_beta
```

Then create a folder called `_data_beta`.

## Conditions versus includes

If you have a lot of conditions in your text, it can get confusing. As a best practice, whenever you insert an `if` condition, add the `endif` at the same time. This will reduce the chances of forgetting to close the if statement. Jekyll won't build if there are problems with the liquid logic.

If your text is getting busy with a lot of conditional statements, consider putting a lot of content into `includes` so that you can more easily see where the conditions begin and end.

## Content reuse

**Summary:** You can reuse chunks of content by storing these files in the includes folder. You then choose to include the file where you need it. This works similar to conref in DITA, except that you can include the file in any content type.

### About content reuse

You can embed content from one file inside another using includes. Put the file containing content you want to reuse (e.g., mypage.html) inside the `_includes/` custom folder and then use a tag like this:

```
{% include custom/mypage.html %}
```

With content in your `_includes` folder, you don't add any frontmatter to these pages because they will be included on other pages already containing frontmatter.

Also, when you include a file, all of the file's contents get included. You can't specify that you only want a specific part of the file included. However, you can use parameters with includes. See the following Jekyll cast for more info about using parameters with includes:

## Page-level variables

You can also create custom variables in your frontmatter like this:

```
---  
title: Page-level variables  
permalink: page_level_variables/  
thing1: Joe  
thing2: Dave  
---
```

You can then access the values in those custom variables using the `page` namespace, like this:

```
thing1: {{page.thing1}}  
thing2: {{page.thing2}}
```

I use includes all the time. Most of the includes in the `_includes` directory are pulled into the theme layouts. For those includes that change, I put them inside `custom` and then inside a specific project folder.

## Collections

**Summary:** Collections are useful if you want to loop through a special folder of pages that you make available in a content API. You could also use collections if you have a set of articles that you want to treat differently from the other content, with a different layout or format.

### What are collections

Collections are custom content types different from pages and posts. You might create a collection if you want to treat a specific set of articles in a unique way, such as with a custom layout or listing. For more detail on collections, see [Ben Balter's explanation of collections here](http://ben.balter.com/2016/02/20/jekyll-collections/) (<http://ben.balter.com/2016/02/20/jekyll-collections/>).

### Create a collection

To create a collection, add the following in your configuration file:

```
collections:  
  tooltips:  
    output: true
```

In this example, “tooltips” is the name of the collection.

### Interacting with collections

You can interact with collections by using the `site.collectionname` namespace, where `collectionname` is what you've configured. In this case, if I wanted to loop through all tooltips, I would use `site.tooltips` instead of `site.pages` or `site.posts`.

See [Collections in the Jekyll documentation](http://jekyllrb.com/docs/collections/) (<http://jekyllrb.com/docs/collections/>) for more information.

## How to use collections

I haven't found a huge use for collections in normal documentation. However, I did find a use for collections in generating a tooltip file that would be used for delivering tooltips to a user interface from text files in the documentation. See [Help APIs and UI tooltips \(page 0\)](#) for details.

## Video tutorial on collections

See this [video tutorial on Jekyll.tips](#) (<http://jekyll.tips/jekyll-casts/introduction-to-collections/>) for more details on collections.

## Sidebar Navigation

**Summary:** The sidebar navigation uses a jQuery component called Navgoco. The sidebar is a somewhat complex part of the theme that remembers your current page, highlights the active item, stays in a fixed position on the page, and more. This page explains a bit about how the sidebar was put together.

### Navgoco foundation

The sidebar uses the [Navgoco jQuery plugin \(https://github.com/tefra/navgoco\)](https://github.com/tefra/navgoco) as its basis. Why not use Bootstrap? Navgoco provides a few features that I couldn't find in Bootstrap:

- Navgoco sets a cookie to remember the user's position in the sidebar. If you refresh the page, the cookie allows the plugin to remember the state.
- Navgoco inserts an `active` class based on the navigation option that's open. This is essential for keeping the accordion open.
- Navgoco includes the expand and collapse features of a sidebar.

In short, the sidebar has some complex logic here. I've integrated Navgoco's features with the `sidebar.html` and `sidebar data` files to build the sidebar. It's probably the most impressive part of this theme. (Other themes usually aren't focused on creating hierarchies of pages, but this kind of hierarchy is important in a documentation site.)

### Accordion sidebar feature

The `sidebar.html` file (inside the `_includes` folder) contains the `.navgoco` method called on the `#mysidebar` element.

There are some options to set within the `.navgoco` method. The only noteworthy option is `accordion`. This option makes it so when you expand a section, the other sections collapse. It's a way of keeping your navigation controls condensed.

The value for `accordion` is a Boolean (`true` or `false`). By default, the `accordion` option is set as `true`. If you don't want the accordion, set it to `false`. Note that there's also a block of code near the bottom of `sidebar.html` that is commented out. Uncomment out that section to have the Collapse all and Expand All buttons appear.

There's a danger with setting the `accordion` to `false`. If you click Expand All and the sidebar expands beyond the dimensions of the browser, users will be stuck. When that happens, it's hard to collapse it. As a best practice, leave the sidebar's `accordion` option set to `true`.

## Fixed position sidebar

The sidebar has one other feature — this one from Bootstrap. If the user's viewport is tall enough, the sidebar remains fixed on the page. This allows the user to scroll down the page and still keep the sidebar in view.

In the `customsscripts.js` file in the `js` folder, there's a function that adds an `affix` class if the height of the browser window is greater than 800 pixels. If the browser's height is less than 800 pixels, the `nav affix` class does not get inserted. As a result, the sidebar can slide up and down as the user scrolls up and down the page.

Depending on your content, you may need to adjust `800` pixel number. If your sidebar is so long that having it in a fixed position makes it so the bottom of the sidebar gets cut off, increase the `800` pixel number here to a higher number.

## Opening sidebar links into external pages

In the attributes for each sidebar item, if you use `external_url` instead of `url`, the theme will insert the link into an `a href` element that opens in a blank target.

For example, the `sidebar.html` file contains the following code:

```
{% if subfolderitem.external_url %}
<li><a href="{{subfolderitem.external_url}}" target="_blank">{{deeplevel.title}}</a></li>
```

You can see that the `external_url` is a condition that applies a different formatting. Although this feature is available, I recommend putting any external navigation links in the top navigation bar instead of the side navigation bar.

## Sidebar item highlighting

The sidebar.html file inserts an `active` class into the sidebar element when the `url` attribute in the sidebar data file matches the page URL.

For example, the sidebar.html file contains the following code:

```
{% elsif page.url == subfolderitem.url %}  
  <li class="active"><a href="{{subfolderitem.url | prepend: site.baseurl}}">{{subfolderitem.title}}</a></li>
```

If the `page.url` matches the `subfolderitem.url`, then an `active` class gets applied. If not, the `active` class does not get applied.

The `page.url` in Jekyll is a site-wide variable. If you insert `{{page.url}}` on a page, it will render as follows: `/mydoc_sidebar_navigation`. The `url` attribute in the sidebar item must match the page URL in order to get the `active` class applied.

This is why the `url` value in the sidebar data file looks something like this:

```
- title: Understanding how the sidebar works  
  url: /mydoc_understand_sidebar/  
  output: web, pdf
```

Note that the `url` does not include the project folder where the file is stored. This is because the site uses permalinks, which pulls the topics out of subfolders and places them into the root directory when the site builds.

Now the `page.url` and the `item.url` can match and the `active` class can get applied. With the `active` class applied, the sidebar section remains open.

# YAML tutorial in the context of Jekyll

**Summary:** YAML is a format that relies on white spacing to separate out the various elements of content. Jekyll lets you use Liquid with YAML as a way to parse through the data. Storing items for your table of contents is one of the most common uses of YAML with Jekyll.

## Overview

One of the most interesting features of Jekyll is the ability to separate out data elements from formatting elements using a combination of YAML and Liquid. This setup is most common when you're trying to create a table of contents.

Not many Jekyll themes actually have a robust table of contents, which is critical when you are creating any kind of documentation or reference material that has a lot of pages.

Here's the basic approach in creating a table of contents. You store your data items in a YAML file using YAML syntax. (I'll go over more about YAML syntax in a later section.) You then create your HTML structure in another file, such as sidebar.html. You might leverage one of the many different table of content frameworks (such as [Navgoco](https://github.com/tefra/navgoco) (<https://github.com/tefra/navgoco>)) that have been created for this HTML structure.

Then, using Liquid syntax for loops and conditions, you access all of those values from the data file and splice them into HTML formatting. This will become more clear as we go through some examples.

## YAML overview

Rather than just jump into YAML at the most advanced level, I'm going to start from ground zero with an introduction to YAML and how you access basic values in your data files using Jekyll.

Note that you don't actually have to use Jekyll when using YAML. YAML is used in a lot of other systems and is a format completely independent of Jekyll. However, because Jekyll uses Liquid, it gives you a lot of power to parse through your YAML data and make use of it.

YAML itself doesn't do anything on its own — it's just a way of storing your data in a specific structure that other utilities can parse.

## YAML basics

You can read about YAML from a lot of different sources. Here are some basic characteristics of YAML:

- YAML (“YAML Ain’t Markup Language”) doesn’t use markup tags. This means you won’t see any kind of angle brackets. It uses white space as a way to form the structure. This makes YAML much more human readable.
- Because YAML does use white space for the structure, YAML is extremely picky about the exactness of spaces. If you have just one extra space somewhere, it can cause the whole file to be invalid.
- For each new level in YAML, you indent two spaces. Each level provides a different access point for the content. You use dot notation to access each new level.
- Because tabs are not universally implemented the same way in editors, a tab might not equate to two spaces. In general, it’s best to manually type two spaces to create a new level in YAML.
- YAML has several types of elements. The most common are mappings and lists. A mapping is simply a key-value pair. A list is a sequence of items. List start with hyphens.
- Items at each level can have various properties. You can create conditions based on the properties.
- You can use “for” loops to iterate through a list.

I realize a lot of this vague and general; however, it will become a lot more clear as we go through some concrete examples.

In the `_data/mydoc` folder, there’s a file called `samplelist.yml`. All of these examples come from that file.

### Example 1: Simple mapping

**YAML:**

```
name:  
  husband: Tom  
  wife: Shannon
```

**Markdown + Liquid:**

```
Husband's name: {{site.data.samplelist.name.husband}}  
Wife's name: {{site.data.samplelist.name.wife}}
```

Notice that in order to access the data file, you use `site.data.samplelist`. `mydoc` is the folder, and `samplelist` is the name of the YAML file.

**Result:**

Husband's name: Tom

Wife's name: Shannon

## Example 2: Line breaks

**YAML:**

```
feedback: >  
  This is my feedback to you.  
  Even if I include linebreaks here,  
  all of the linebreaks will be removed when the value is inser  
ted.  
  
block: |  
  This pipe does something a little different.  
  It preserves the breaks.  
  This is really helpful for code samples,  
  since you can format the code samples with  
  the appropriate
```

**Markdown:**

**\*\*Feedback\*\***

This is my feedback to you. Even if I include linebreaks here, all of the linebreaks will be removed when the value is inserted.

**\*\*Block\*\***

This pipe does something a little different. It preserves the breaks. This is really helpful for code samples, since you can format the code samples with the appropriate white spacing.

**Result:**

**Feedback** This is my feedback to you. Even if I include linebreaks here, all of the linebreaks will be removed when the value is inserted.

**Block** This pipe does something a little different. It preserves the breaks. This is really helpful for code samples, since you can format the code samples with the appropriate white spacing.

The right angle bracket `>` allows you to put the value on the next lines (which must be indented). Even if you create a line break, the output will remove all of those line breaks, creating one paragraph.

The pipe `|` functions like the angle bracket in that it allows you to put the values for the mapping on the next lines (which again must be indented). However, the pipe does preserve all of the line breaks that you use. This makes the pipe method ideal for storing code samples.

## Example 3: Simple list

**YAML:**

```
bikes:  
- title: mountain bikes  
- title: road bikes  
- title: hybrid bikes
```

**Markdown + Liquid:**

```
{% for item in site.data.samplelist.bikes %}
* {{item.title}}
{% endfor %}
```

**Result:**

- mountain bikes
- road bikes
- hybrid bikes

Here we use a “for” loop to get each item in the bikes list. By using `.title` we only get the `title` property from each list item.

## Example 4: List items

**YAML:**

```
salesteams:
- title: Regions
  subfolderitems:
    - location: US
    - location: Spain
    - location: France
```

**Markdown + Liquid:**

```
{% for item in site.data.samplelist.salesteams %}
<h3>{{item.title}}</h3>
<ul>
  {% for entry in item.subitems %}
  <li>{{entry.location}}</li>
  {% endfor %}
</ul>
{% endfor %}
```

**Result:**

Regions

Hopefully you can start to see how to wrap more complex formatting around the YAML content. When you use a “for” loop, you choose the variable of what to call the list items. The variable you choose to use becomes how you access the properties of each list item. In this case, I decided to use the variable `item`. In order to get each property of the list item, I used `item.subitems`.

Each list item starts with the hyphen `-`. You cannot directly access the list item by referring to a mapping. You only loop through the list items. If you wanted to access the list item, you would have to use something like `[1]`, which is how you access the position in an array. You cannot access a list item like you can access a mapping key.

## Example 5: Table of contents

### YAML:

```
toc:
  - title: Group 1
    subfolderitems:
      - page: Thing 1
      - page: Thing 2
      - page: Thing 3
  - title: Group 2
    subfolderitems:
      - page: Piece 1
      - page: Piece 2
      - page: Piece 3
  - title: Group 3
    subfolderitems:
      - page: Widget 1
      - page: Widget 2 it's
      - page: Widget 3
```

### Markdown + Liquid:

```
{% for item in site.data.samplelist.toc %}
<h3>{{item.title}}</h3>
<ul>
  {% for entry in item.subfolderitems %}
  <li>{{entry.page}}</li>
  {% endfor %}
</ul>
{% endfor %}
```

**Result:****Group 1**

- Thing 1
- Thing 2
- Thing 3

**Group 2**

- Piece 1
- Piece 2
- Piece 3

**Group 3**

- Widget 1
- Widget 2
- Widget 3

This example is similar to the previous one, but it's more developed as a real table of contents.

## Example 6: Variables

**YAML:**

```
something: &hello Greetings earthling!  
myref: *hello
```

**Markdown:**

```
{{ site.data.samplelist.myref }}
```

**Result:**

Greetings earthling!

This example is notably different. Here I'm showing how to reuse content in YAML file. If you have the same value that you want to repeat in other mappings, you can create a variable using the `&` symbol. Then when you want to refer to that variable's value, you use an asterisk `*` followed by the name of the variable.

In this case the variable is `&hello` and its value is `Greetings earthling!` In order to reuse that same value, you just type `*hello`.

I don't use variables much, but that's not to say they couldn't be highly useful. For example, let's say you put name of the product in parentheses after each title (because you have various products that you're providing documentation for in the same site). You could create a variable for that product name so that if you change how you're referring to it, you wouldn't have to change all instances of it in your YAML file.

## Example 7: Positions in lists

### YAML:

```
about:
- zero
- one
- two
- three
```

### Markdown:

```
{{ site.data.samplelist.about[0] }}
```

### Result:

zero

You can see that I'm accessing one of the items in the list using `[0]`. This refers to the position in the array where a list item is. Like most programming languages, you start counting at zero, not one.

I wanted to include this example because it points to the challenge in getting a value from a specific list item. You can't just call out a specific item in a list like you can with a mapping. This is why you usually iterate through the list items using a "for" loop.

## Example 8: Properties from list items at specific positions

### YAML:

```
numbercolors:  
- zero:  
  properties: red  
- one:  
  properties: yellow  
- two:  
  properties: green  
- three:  
  properties: blue
```

**Markdown + Liquid:**

```
{{ site.data.samplelist.numbercolors[0].properties }}
```

**Result:**

red

This example is similar as before; however, in this case we're getting a specific property from the list item in the zero position.

## Example 9: Conditions

**YAML:**

```
mypages:
- section1: Section 1
  audience: developers
  product: acme
  url: facebook.com
- section2: Section 2
  audience: writers
  product: acme
  url: google.com
- section3: Section 3
  audience: developers
  product: acme
  url: amazon.com
- section4: Section 4
  audience: writers
  product: gizmo
  url: apple.com
- section5: Section 5
  audience: writers
  product: acme
  url: microsoft.com
```

### Markdown + Liquid:

```
{% for sec in site.data.samplelist.mypages %}
{% if sec.audience == "writers" %}
* {{sec.url}}
{% endif %}
{% endfor %}
```

### Result:

- google.com
- apple.com
- microsoft.com

This example shows how you can use conditions in order to selectively get the YAML content. In your table of contents, you might have a lot of different pages. However, you might only want to get the pages for a particular audience. Conditions lets you get only the items that meet those audience attributes.

Now let's adjust the condition just a little. Let's add a second condition so that the audience property has to be writers and the product property has to be gizmo. This is how you would write it:

```
{% for sec in site.data.samplelist.mypages %}
{% if sec.audience == "writers" and sec.product == "gizmo" %}
* {{sec.url}}
{% endif %}
{% endfor %}
```

And here is the result:

- [apple.com](#)

## More resources

For more examples and explanations, see this helpful post on tournemille.com:

[How to create data-driven navigation in Jekyll](#)

(<http://www.tournemille.com/blog/How-to-create-data-driven-navigation-in-Jekyll/>).

## Tags

**Summary:** Tags provide another means of navigation for your content. Unlike the table of contents, tags can show the content in a variety of arrangements and groupings. Implementing tags in this Jekyll theme is somewhat of a manual process.

### Add a tag to a page

You can add tags to pages by adding `tags` in the frontmatter with values inside brackets, like this:

```
---
title: 2.0 Release Notes
permalink: release_notes_2_0/
tags: [formatting, single_sourcing]
---
```

### Tags overview

**Note:** With posts, tags have a namespace that you can access with `posts.tags.tagname`, where `tagname` is the name of the tag. You can then list all posts in that tag namespace. But pages don't off this same tag namespace, so you could actually use another key instead of `tags`. Nevertheless, I'm using the same `tags` approach for posts as with pages.

To prevent tags from getting out of control and inconsistent, first make sure the tag appears in the `_data/tags.yml` file. If it's not there, the tag you add to a page won't be read. I added this check just to make sure I'm using the same tags consistently and not adding new tags that don't have tag archive pages.

**Note:** In contrast to WordPress, with Jekyll to get tags on pages you have to build out the functionality for tags so that clicking a tag name shows you all pages with that tag. Tags in Jekyll are much more manual.

Additionally, you must create a tag archive page similar to the other pages named `tag_{tagname}.html` folder. This theme doesn't auto-create tag archive pages.

For simplicity, make all your tags single words (connect them with hyphens if necessary).

## Setting up tags

Tags have a few components.

1. In the `_data/tags.yml` file, add the tag names you want to allow. For example:

```
allowed-tags:
  - getting_started
  - overview
  - formatting
  - publishing
  - single_sourcing
  - special_layouts
  - content types
```

2. Create a tag archive file for each tag in your `tags_doc.yml` list. Name the file following the same pattern in the `tags` folder, like this:  
`tag_collaboration.html`.

Each tag archive file needs only this:

```
---
title: "Collaboration pages"
tagName: collaboration
search: exclude
permalink: tag_collaboration/
sidebar: tags_sidebar
---
{% include taglogic.html %}
```

**❗ Note:** In the `_includes/mydoc` folder, there's a `taglogic.html` file. This file (included in each tag archive file) has common logic for getting the tags and listing out the pages containing the tag in a table with summaries or truncated excerpts. You don't have to do

anything with the file — just leave it there because the tag archive pages reference it.

3. Change the title, tagName, and permalink values to be specific to the tag name you just created.

By default, the `_layouts/page.html` file will look for any tags on a page and insert them at the bottom of the page using this code:

```
<div class="tags">
  {% if page.tags != null %}
  <b>Tags: </b>
  {% assign projectTags = site.data.tags.allowed-tags %}
  {% for tag in page.tags %}
  {% if projectTags contains tag %}
  <a href="{{ "/" | prepend: site.baseurl | append: tag }}" class="btn btn-default navbar-btn cursorNorm" role="button">{{page.tagName}} {{tag}}</a>
  {% endif %}
  {% endfor %}
  {% endif %}
</div>
```

Because this code appears on the `_layouts/page.html` file by default, you don't need to do anything in your page to get the tags to appear. However, if you want to alter the placement or change the button color, you can do so within the `_includes/taglogic.html` file.

You can change the button color by changing the class on the button from `btn-info` to one of the other button classes bootstrap provides. See [page \(page 112\)](#) for more options on button class names.

## Retrieving pages for a specific tag

If you want to retrieve pages outside of a particular `tag_archive` page, you could use this code:

```
Getting started pages:
<ul>
{% for page in site.pages %}
{% for tag in page.tags %}
{% if tag == "getting_started" %}
<li><a href="{{page.url | prepend: '..'}}">{{page.titl
e}}</a></li>
{% endif %}
{% endfor %}
{% endfor %}
</ul>
```

Here's how that code renders:

Getting started pages:

- [About the theme author \(page 0\)](#)
- [About Ruby, Gems, Bundler, and other prerequisites \(page 0\)](#)
- [Install Jekyll on Mac \(page 0\)](#)
- [Pages \(page 0\)](#)
- [Posts \(page 0\)](#)
- [Release notes 5.0 \(page 0\)](#)
- [Sample formatting \(page 0\)](#)
- [Sidebar Navigation \(page 0\)](#)
- [Support \(page 0\)](#)
- [Supported features \(page 0\)](#)

If you want to sort the pages alphabetically, you have to apply a `sort` filter:

```
Getting started pages:
<ul>
{% assign sorted_pages = (site.pages | sort: 'title') %}
{% for page in sorted_pages %}
{% for tag in page.tags %}
{% if tag == "getting_started" %}
<li><a href="{{page.url | prepend: '..'}}">{{page.titl
e}}</a></li>
{% endif %}
{% endfor %}
{% endfor %}
</ul>
```

Here's how that code renders:

Getting started pages:

- [About Ruby, Gems, Bundler, and other prerequisites \(page 0\)](#)
- [About the theme author \(page 0\)](#)
- [Install Jekyll on Mac \(page 0\)](#)
- [Pages \(page 0\)](#)
- [Posts \(page 0\)](#)
- [Release notes 5.0 \(page 0\)](#)
- [Sample formatting \(page 0\)](#)
- [Sidebar Navigation \(page 0\)](#)
- [Support \(page 0\)](#)
- [Supported features \(page 0\)](#)

## Efficiency

Although the tag approach here uses `for` loops, these are somewhat inefficient on a large site. Most of my tech doc projects don't have hundreds of pages (like my blog does). If your project does have hundreds of pages, this `for` loop approach with tags is going to slow down your build times.

Without the ability to access pages inside a universal namespace with the page type, there aren't many workarounds here for faster looping.

With posts (instead of pages), since you can access just the posts inside `posts.tag.tagname`, you can be a lot more efficient with the looping.

Still, if the build times are getting long (e.g., 1 or 2 minutes per build), look into reducing the number of `for` loops on your site.

## Empty tags?

If your page shows “tags:” at the bottom without any value, it could mean a couple of things:

- You’re using a tag that isn’t specified in your allowed tags list in your `tags.yml` file.
- You have an empty `tags: []` property in your frontmatter.

If you don’t want tags to appear at all on your page, remove the `tags` property from your frontmatter.

## Remembering the right tags

Since you may have many tags and find it difficult to remember what tags are allowed, I recommend creating a template that prepopulates all your frontmatter with all possible tags. Then just remove the tags that don’t apply.

See [WebStorm Text Editor \(page 0\)](#) for tips on creating file templates in WebStorm.

## Series

**Summary:** You can automatically link together topics belonging to the same series. This helps users know the context within a particular process.

### Using series for pages

You create a series by looking for all pages within a tag namespace that contain certain frontmatter. Here's a [demo](#).

#### 1. Create the series button

First create an include that contains your series button:

```
<div class="seriesContext">
  <div class="btn-group">
    <button type="button" data-toggle="dropdown" class="btn btn-primary dropdown-toggle">Series Demo <span class="caret"></span></button>
    <ol class="dropdown-menu">
      {% assign pages = site.pages | sort:"weight" %}
      {% for p in pages %}
        {% if p.series == "ACME series" %}
          {% if p.url == page.url %}
            <li class="active"> → {{p.weight}}. {{p.title}}</li>
          {% else %}
            <li>
              <a href="{{p.url | prepend: '..'}}">{{p.weight}}. {{p.title}}</a>
            </li>
          {% endif %}
        {% endif %}
      {% endfor %}
    </ol>
  </div>
</div>
```

Change “ACME series” to the name of your series.

Save this in your `_includes/custom` folder as something like `series_acme.html`.

**⚠ Warning:** With pages, there isn’t a universal namespace created from tags or categories like there is with Jekyll posts. As a result, you have to loop through all pages. If you have a lot of pages in your site (e.g., 1,000+), then this looping will create a slow build time. If this is the case, you will need to rethink the approach to looping here.

## 2. Create the “next” include

Now create another include for the Next button at the bottom of the page. Copy the following code, changing the series name to your series’name:

```
<p>{% assign series_pages = site.tags.series_acme %}
  {% for p in pages %}
    {% if p.series == "ACME series" %}
      {% assign nextTopic = page.weight | plus: "1" %}
      {% if p.weight == nextTopic %}
        <a href="{{p.url | prepend: '..'}}"><button type="button" c
lass="btn btn-primary">Next: {{p.weight}} {{p.title}}</butto
n></a>
      {% endif %}
    {% endif %}
  {% endfor %}
</p>
```

Change “acme” to the name of your series.

Save this in your `_includes/custom/mydoc` folder as `series_acme_next.html`.

## 3. Add the correct frontmatter to each of your series pages

Now add the following frontmatter to each page in the series:

```
series: "ACME series"
weight: 1.0
```

With weights, Jekyll will treat 10 as coming after 1. If you have more than 10 items, consider changing `plus: "1.0"` to `plus: "0.1"`.

Additionally, if your page names are prefaced with numbers, such as "1. Download the code," then the `{{p.weight}}` will create a duplicate number. In that case, just remove the `{{p.weight}}` from both code samples here.

## 4. Add links to the series button and next button on each page.

On each series page, add a link to the series button at the top and a link to the next button at the bottom.

```
<!-- your frontmatter goes here -->

{% include custom/series_acme.html %}

<!-- your page content goes here ... -->

{% include custom/series_acme_next.html %}
```

## Changing the series drop-down color

The Bootstrap menu uses the `primary` class for styling. If you change this class in your theme, the Bootstrap menu should automatically change color as well. You can also just use another Bootstrap class in your button code. Instead of `btn-primary`, use `btn-info` or `btn-warning`. See [Labels \(page 112\)](#) for more Bootstrap button classes.

## Using a collection with your series

Instead of copying and pasting the button includes on each of your series, you could also create a collection and define a layout for the collection that has the include code. For more information on creating collections, see [Collections \(page 68\)](#).

## Tooltips

**Summary:** You can add tooltips to any word, such as an acronym or specialized term. Tooltips work well for glossary definitions, because you don't have to keep repeating the definition, nor do you assume the reader already knows the word's meaning.

### Creating tooltips

Because this theme is built on Bootstrap, you can simply use a specific attribute on an element to insert a tooltip.

Suppose you have a glossary.yml file inside your `_data` folder. You could pull in that glossary definition like this:

```
<a href="#" data-toggle="tooltip" data-original-title="{{site.data.glossary.jekyll_platform}}">Jekyll</a> is my favorite tool for building websites.</a>
```

This renders to the following:

[Jekyll](#) is my favorite tool for building websites.

## Alerts

**Summary:** You can insert notes, tips, warnings, and important alerts in your content. These notes make use of Bootstrap styling and are available through data references such as `site.data.alerts.note`.

### About alerts

Alerts are little warnings, info, or other messages that you have called out in special formatting. In order to use these alerts or callouts, reference the appropriate value stored in the `alerts.yml` file as described in the following sections.

### Alerts

Similar to [inserting images \(page 0\)](#), you insert alerts through various includes that have been developed. These includes provide templates through which you pass parameters to easily populate the right HTML code.

```
{% include note.html content="This is my note. All the content I type here is treated as a single paragraph." %}
```

Here's the result:

**📘 Note:** This is my note. All the content I type here is treated as a single paragraph.

With alerts, there's just one include property:

Property	description
content	The content for the alert.

If you need multiple paragraphs, enter `<br/><br/>` tags. This is because block level tags aren't allowed here, as Kramdown is processing the content as Markdown despite the fact that the content is surrounded by HTML tags. Here's an example with a break:

```
{% include note.html content="This is my note. All the content I type here is treated as a single paragraph. <br/><br/> Now I'm typing on a new line." %}
```

Here's the result:

**Note:** This is my note. All the content I type here is treated as a single paragraph.

Now I'm typing on a new line.

## Types of alerts available

There are four types of alerts you can leverage:

- `note.html`
- `tip.html`
- `warning.html`
- `important.html`

They function the same except they have a different color, icon, and alert word. You include the different types by selecting the include template you want. Here are samples of each alert:

**Note:** This is my note.

**Tip:** This is my tip.

**Warning:** This is my warning.

**Important:** This is my important info.

These alerts leverage includes stored in the `_include` folder. The `content` option is a parameter that you pass to the include. In the include, the parameter is passed like this:

```
<div markdown="span" class="alert alert-info" role="alert"><i class="fa fa-info-circle"></i> <b>Note:</b> {{include.content}}</div>
```

The content in `content="This is my note."` gets inserted into the `{{include.content}}` part of the template. You can follow this same pattern to build additional includes. See this [Jekyll screencast on includes](http://jekyll.tips/jekyll-casts/includes/) (<http://jekyll.tips/jekyll-casts/includes/>) or [this screencast](https://www.youtube.com/watch?v=TJcn_PJ2100) ([https://www.youtube.com/watch?v=TJcn\\_PJ2100](https://www.youtube.com/watch?v=TJcn_PJ2100)) for more information.

## Callouts

There's another type of callout available called callouts. This format is typically used for longer callout that spans more than one or two paragraphs, but really it's just a stylistic preference whether to use an alert or callout.

Here's the syntax for a callout:

```
{% include callout.html content="This is my callout. It has a border on the left whose color you define by passing a type parameter. I typically use this style of callout when I have more information that I want to share, often spanning multiple paragraphs." type="primary" %}
```

Here's the result:

This is my callout. It has a border on the left whose color you define by passing a type parameter. I typically use this style of callout when I have more information that I want to share, often spanning multiple paragraphs.

The available properties for callouts are as follows:

Property	description
content	The content for the callout.

Property	description
type	The style for the callout. Options are <code>danger</code> , <code>default</code> , <code>primary</code> , <code>success</code> , <code>info</code> , and <code>warning</code> .

The types just define the color of the left border. Each of these callout types get inserted as a class name in the callout template. These class names correspond with styles in Bootstrap. These classes are common Bootstrap class names whose style attributes differ depending on your Bootstrap theme and style definitions.

Here's an example of each different type of callout:

This is my **danger** type callout. It has a border on the left whose color you define by passing a type parameter.

This is my **default** type callout. It has a border on the left whose color you define by passing a type parameter.

This is my **primary** type callout. It has a border on the left whose color you define by passing a type parameter.

This is my **success** type callout. It has a border on the left whose color you define by passing a type parameter.

This is my **info** type callout. It has a border on the left whose color you define by passing a type parameter.

This is my **warning** type callout. It has a border on the left whose color you define by passing a type parameter.

Now that in contrast to alerts, callouts don't include the alert word (note, tip, warning, or important). You have to manually include it inside `content` if you want it.

To include paragraph breaks, use `<br/><br/>` inside the callout:

```
{% include callout.html content="**Important information**: This is my callout. It has a border on the left whose color you define by passing a type parameter. I typically use this style of callout when I have more information that I want to share, often spanning multiple paragraphs. <br/><br/>Here I am starting a new paragraph, because I have lots of information to share. You may wonder why I'm using line breaks instead of paragraph tags. This is because Kramdown processes the Markdown here as a span rather than a div (for whatever reason). Be grateful that you can be using Markdown at all inside of HTML. That's usually not allowed in Markdown syntax, but it's allowed here." type="primary" %}
```

Here's the result:

**Important information:** This is my callout. It has a border on the left whose color you define by passing a type parameter. I typically use this style of callout when I have more information that I want to share, often spanning multiple paragraphs.

Here I am starting a new paragraph, because I have lots of information to share. You may wonder why I'm using line breaks instead of paragraph tags. This is because Kramdown processes the Markdown here as a span rather than a div (for whatever reason). Be grateful that you can be using Markdown at all inside of HTML. That's usually not allowed in Markdown syntax, but it's allowed here.

## Use Liquid variables inside parameters with includes

Suppose you have a product name or some other property that you're storing as a variable in your configuration file (`_config.yml`), and you want to use this variable in the `content` parameter for your alert or callout. You will get an error if you use Liquid syntax inside a `include` parameter. For example, this syntax will produce an error:

```
{% include note.html content="The {{site.company}} is pleased to announce an upcoming release." %}
```

The error will say something like this:

```
Liquid Exception: Invalid syntax for include tag. File contains invalid characters or sequences: ... Valid syntax: {% include file.ext param='value' param2='value' %}
```

To use variables in your include parameters, you must use the “variable parameter” approach. First you use a `capture` tag to capture some content. Then you reference this captured tag in your include. Here’s an example.

In my site configuration file (`_config.yml`), I have a property called `company_name`.

```
company_name: Your company
```

I want to use this variable in my note include.

First, before the note I capture the content for my note’s include like this:

```
{% capture company_note %}The {{site.company_name}} company is pleased to announce an upcoming release.{% endcapture %}
```

Now reference the `company_note` in your `include` parameter like this:

```
{% include note.html content=company_note %}
```

Here’s the result:

**Note:** The Your company is pleased to announce an upcoming release.

Note the omission of quotation marks with variable parameters.

Also note that instead of storing the variable in your site’s configuration file, you could also put the variable in your page’s frontmatter. Then instead of using `{{site.company_name}}` you would use `{{page.company_name}}`.

## Markdown inside of callouts and alerts

You can use Markdown inside of callouts and alerts, even though this content actually gets inserted inside of HTML in the include. This is one of the advantages of kramdown Markdown. The include template has an attribute of `markdown="span"` that allows for the processor to parse Markdown inside of HTML.

## Validity checking

If you have some of the syntax wrong with an alert or callout, you'll see an error when Jekyll tries to build your site. The error may look like this:

```
Liquid Exception: Invalid syntax for include tag: content="This is my info type callout. It has a border on the left whose color you define by passing a type parameter. type="info" Valid syntax: {% include file.ext param='value' param2='value' %} in mydoc/mydoc_alerts.md
```

These errors are a good thing, because it lets you know there's an error in your syntax. Without the errors, you may not realize that you coded something incorrectly until you see the lack of alert or callout styling in your output.

In this case, the quotation marks aren't set correctly. I forgot the closing quotation mark for the content parameter include.

## Blast a warning to users on every page

If you want to blast a warning to users on every page, add the alert or callout to the `_layouts/page.html` page right below the frontmatter. Every page using the page layout (all, by default) will show this message.

## Icons

**Summary:** You can integrate font icons through the Font Awesome and Glyphical Halflings libraries. These libraries allow you to embed icons through their libraries delivered as a link reference. You don't need any image libraries downloaded in your project.

### Font icon options

The theme has two font icon sets integrated: Font Awesome and Glyphicons Halflings. The latter is part of Bootstrap, while the former is independent. Font icons allow you to insert icons drawn as vectors from a CDN (so you don't have any local images on your own site).

### See Font Awesome icons available

Go to the [Font Awesome library](http://fontawesome.github.io/Font-Awesome/icons/) (<http://fontawesome.github.io/Font-Awesome/icons/>) to see the available icons.

The Font Awesome icons allow you to adjust their size by simply adding `fa-2x`, `fa-3x` and so forth as a class to the icon to adjust their size to two times or three times the original size. As vector icons, they scale crisply at any size.

Here's an example of how to scale up a camera icon:

```
<i class="fa fa-camera-retro"></i> normal size (1x)  
<i class="fa fa-camera-retro fa-lg"></i> fa-lg  
<i class="fa fa-camera-retro fa-2x"></i> fa-2x  
<i class="fa fa-camera-retro fa-3x"></i> fa-3x  
<i class="fa fa-camera-retro fa-4x"></i> fa-4x  
<i class="fa fa-camera-retro fa-5x"></i> fa-5x
```


Here's what they render to:



With Font Awesome, you always use the `i` tag with the appropriate class. You also implement `fa` as a base class first. You can use font awesome icons inside other elements. Here I'm using a Font Awesome class inside a Bootstrap alert:

```
<div class="alert alert-danger" role="alert"><i class="fa fa-exclamation-circle"></i> <b>Warning: </b>This is a special warning message.
```

Here's the result:



The notes, tips, warnings, etc., are pre-coded with Font Awesome and stored in the `alerts.yml` file. That file includes the following:

```
tip: '<div class="alert alert-success" role="alert"><i class="fa fa-check-square-o"></i> <b>Tip: </b>'
note: '<div class="alert alert-info" role="alert"><i class="fa fa-info-circle"></i> <b>Note: </b>'
important: '<div class="alert alert-warning" role="alert"><i class="fa fa-warning"></i> <b>Important: </b>'
warning: '<div class="alert alert-danger" role="alert"><i class="fa fa-exclamation-circle"></i> <b>Warning: </b>'
end: '</div>'

callout_danger: '<div class="bs-callout bs-callout-danger">'
callout_default: '<div class="bs-callout bs-callout-default">'
callout_primary: '<div class="bs-callout bs-callout-primary">'
callout_success: '<div class="bs-callout bs-callout-success">'
callout_info: '<div class="bs-callout bs-callout-info">'
callout_warning: '<div class="bs-callout bs-callout-warning">'

hr_faded: '<hr class="faded"/>'
hr_shaded: '<hr class="shaded"/>'
```

This means you can insert a tip, note, warning, or important alert simply by using these tags.

```
{% include note.html content="Add your note here." %}
```

```
{% include tip.html content="Add your tip here." %}
```

```
{% include important.html content="Add your important info here." %}
```

```
{% include warning.html content="Add your warning here." %}
```

Here's the result:

**Note:** Add your note here.

**Tip:** Here's my tip.

**Important:** This information is very important.

**Warning:** If you overlook this, you may die.

The color scheme is the default colors from Bootstrap. You can modify the icons or colors as needed.

## Creating your own combinations

You can innovate with your own combinations. Here's a similar approach with a file download icon:

```
<div class="alert alert-success" role="alert"><i class="fa fa-download fa-lg"></i> This is a special tip about some file to do wnload....</div>
```

And the result:

**↓** This is a special tip about some file to download....

Grab the right class name from the [Font Awesome library](http://fontawesome.github.io/Font-Awesome/icons/) (<http://fontawesome.github.io/Font-Awesome/icons/>) and then implement it by following the pattern shown previously.

If you want to make your fonts even larger than the 5x style, add a custom style to your stylesheet like this:

```
.fa-10x{font-size:1700%;}
```

Then any element with the attribute `fa-10x` will be enlarged 1700%.

## Glyphicon icons available

Glyphicons work similarly to Font Awesome. Go to the [Glyphicons library](http://getbootstrap.com/components/#glyphicons) (<http://getbootstrap.com/components/#glyphicons>) to see the icons available.

Although the Glyphicon Halflings library doesn't provide the scalable classes like Font Awesome, there's a [StackOverflow trick](http://stackoverflow.com/questions/24960201/how-do-i-make-glyphicons-bigger-change-size) (<http://stackoverflow.com/questions/24960201/how-do-i-make-glyphicons-bigger-change-size>)

to make the icons behave in a similar way. This theme's stylesheet (customstyles.css) includes the following to the stylesheet:

```
.gi-2x{font-size: 2em;}  
.gi-3x{font-size: 3em;}  
.gi-4x{font-size: 4em;}  
.gi-5x{font-size: 5em;}
```

Now you just add `gi-5x` or whatever to change the size of the font icon:

```
<span class="glyphicon glyphicon-globe gi-5x"></span>
```

And here's the result:



Glyphicons use the `span` element instead of `i` to attach their classes.

Here's another example:

```
<span class="glyphicon glyphicon-download"></span>
```



And magnified:

```
<span class="glyphicon glyphicon-download gi-3x"></span>
```



You can also put glyphicons inside other elements:

```
<div class="alert alert-danger" role="alert">
  <span class="glyphicon glyphicon-exclamation-sign" aria-hidden="true"></span>
  <b>Error:</b> Enter a valid email address
</div>
```

 **Error:** Enter a valid email address

## Callouts

The previously shown alerts might be fine for short messages, but with longer notes, the solid color takes up a bit of space. In this theme, you also have the option of using callouts, which are pretty common in Bootstrap's documentation but surprisingly not offered as an explicit element. Their styles have been copied into this theme, in a way similar to the alerts:

```
<div class="bs-callout bs-callout-info">
  This is a special info message. </div>
```

**?** This is a special info message. This is a special info message.

And here's the shortcode:

```
{{site.data.alerts.callout_info}}This is a special callout information message.
```

Here's the result:

This is a special callout information message. You can use any of the following: `` {{site.data.alerts.callout\_default}} {{site.data.alerts.callout\_primary}} {{site.data.alerts.callout\_success}} {{site.data.alerts.callout\_info}} {{site.data.alerts.callout\_warning}} `` The only difference is the color of the left bar. Callouts are explained in a bit more detail in [Alerts \(page 94\)](#). [news]: /news.html [mydoc\_introduction]: /mydoc\_introduction.html [p1\_landing\_page]: /p1\_landing\_page.html [p2\_landing\_page]: /p2\_landing\_page.html [titlepage]: /titlepage.html [tocpage]: /tocpage.html [home]: /home.html [mydoc\_release\_notes\_50]: /mydoc\_release\_notes\_50.html [mydoc\_sample\_formatting]: /mydoc\_sample\_formatting.html [mydoc\_introduction]: /mydoc\_introduction.html [mydoc\_supported\_features]: /mydoc\_supported\_features.html [mydoc\_about]: /mydoc\_about.html [mydoc\_support]: /mydoc\_support.html [mydoc\_about\_ruby\_gems\_etc]: /mydoc\_about\_ruby\_gems\_etc.html [mydoc\_install\_jekyll\_on\_mac]: /mydoc\_install\_jekyll\_on\_mac.html [mydoc\_install\_jekyll\_on\_windows]: /mydoc\_install\_jekyll\_on\_windows.html [mydoc\_pages]: /mydoc\_pages.html [mydoc\_posts]: /mydoc\_posts.html [mydoc\_conditional\_logic]: /mydoc\_conditional\_logic.html [mydoc\_content\_reuse]: /mydoc\_content\_reuse.html [mydoc\_collections]: /mydoc\_collections.html [mydoc\_sidebar\_navigation]: /mydoc\_sidebar\_navigation.html [mydoc\_yaml\_tutorial]: /mydoc\_yaml\_tutorial.html [mydoc\_tags]: /mydoc\_tags.html [mydoc\_series]: /mydoc\_series.html [mydoc\_adding\_tooltips]: /mydoc\_adding\_tooltips.html [mydoc\_alerts]: /mydoc\_alerts.html [mydoc\_icons]: /mydoc\_icons.html [mydoc\_images]: /mydoc\_images.html [mydoc\_labels]: /mydoc\_labels.html [mydoc\_hyperlinks]:

[/mydoc\\_hyperlinks.html](#) [[mydoc\\_navtabs](#)]: [/mydoc\\_navtabs.html](#)  
[[mydoc\\_tables](#)]: [/mydoc\\_tables.html](#) [[mydoc\\_syntax\\_highlighting](#)]:  
[/mydoc\\_syntax\\_highlighting.html](#) [[mydoc\\_commenting\\_on\\_files](#)]:  
[/mydoc\\_commenting\\_on\\_files.html](#) [[mydoc\\_build\\_arguments](#)]:  
[/mydoc\\_build\\_arguments.html](#) [[mydoc\\_themes](#)]: [/mydoc\\_themes.html](#)  
[[mydoc\\_title\\_checker](#)]: [/mydoc\\_title\\_checker.html](#)  
[[mydoc\\_generating\\_pdfs](#)]: [/mydoc\\_generating\\_pdfs.html](#)  
[[mydoc\\_help\\_api](#)]: [/mydoc\\_help\\_api.html](#) [[mydoc\\_search\\_configuration](#)]:  
[/mydoc\\_search\\_configuration.html](#) [[mydoc\\_iterm\\_profiles](#)]:  
[/mydoc\\_iterm\\_profiles.html](#) [[mydoc\\_push\\_build\\_to\\_server](#)]:  
[/mydoc\\_push\\_build\\_to\\_server.html](#) [[mydoc\\_no\\_password\\_prompts\\_scp](#)]:  
[/mydoc\\_no\\_password\\_prompts\\_scp.html](#)  
[[mydoc\\_publishing\\_github\\_pages](#)]: [/mydoc\\_publishing\\_github\\_pages.html](#)  
[[mydoc\\_kb\\_layout](#)]: [/mydoc\\_kb\\_layout.html](#) [[mydoc\\_glossary](#)]:  
[/mydoc\\_glossary.html](#) [[mydoc\\_faq\\_layout](#)]: [/mydoc\\_faq\\_layout.html](#)  
[[mydoc\\_troubleshooting](#)]: [/mydoc\\_troubleshooting.html](#)  
[[mydoc\\_tag\\_archives\\_overview](#)]: [/mydoc\\_tag\\_archives\\_overview.html](#)  
[[tag\\_formatting](#)]: [/tag\\_formatting.html](#) [[tag\\_navigation](#)]:  
[/tag\\_navigation.html](#) [[tag\\_content\\_types](#)]: [/tag\\_content\\_types.html](#)  
[[tag\\_publishing](#)]: [/tag\\_publishing.html](#) [[tag\\_special\\_layouts](#)]:  
[/tag\\_special\\_layouts.html](#) [[tag\\_collaboration](#)]: [/tag\\_collaboration.html](#)  
[[tag\\_troubleshooting](#)]: [/tag\\_troubleshooting.html](#)  
[[mydoc\\_hyperlinks.html#managed-links](#)]:  
[/mydoc\\_hyperlinks.html#managed-links.html](#) [[index.html#variable-  
includes](#)]: [/index.html#variable-includes.html](#) [[index.html#htmltables](#)]:  
[/index.html#htmltables.html](#) [[index.html#someIdTag](#)]:  
[/index.html#someIdTag.html](#) [[titlepage](#)]: [/titlepage.html](#) [[tocpage](#)]:  
[/tocpage.html](#) [[p1\\_landing\\_page](#)]: [/p1\\_landing\\_page.html](#) [[p1\\_sample1](#)]:  
[/p1\\_sample1.html](#) [[p1\\_sample2](#)]: [/p1\\_sample2.html](#) [[p1\\_sample3](#)]:  
[/p1\\_sample3.html](#) [[p1\\_sample4](#)]: [/p1\\_sample4.html](#) [[p1\\_sample5](#)]:  
[/p1\\_sample5.html](#) [[p1\\_sample6](#)]: [/p1\\_sample6.html](#) [[p1\\_sample7](#)]:  
[/p1\\_sample7.html](#) [[titlepage](#)]: [titlepage.html](#) [[tocpage](#)]: [tocpage.html](#)  
[[p2\\_landing\\_page](#)]: [/p2\\_landing\\_page.html](#) [[p2\\_sample1](#)]:  
[/p2\\_sample1.html](#) [[p2\\_sample2](#)]: [/p2\\_sample2.html](#) [[p2\\_sample3](#)]:  
[/p2\\_sample3.html](#) [[p2\\_sample4](#)]: [/p2\\_sample4.html](#) [[p2\\_sample5](#)]:  
[/p2\\_sample5.html](#) [[p2\\_sample6](#)]: [/p2\\_sample6.html](#) [[p2\\_sample7](#)]:  
[/p2\\_sample7.html](#) [[p2\\_sample8](#)]: [/p2\\_sample8.html](#) [[p2\\_sample9](#)]:  
[/p2\\_sample9.html](#) [[p2\\_sample10](#)]: [/p2\\_sample10.html](#) [[p2\\_sample11](#)]:  
[/p2\\_sample11.html](#) [[p2\\_sample12](#)]: [/p2\\_sample12.html](#) [[p2\\_sample13](#)]:  
[/p2\\_sample13.html](#) [[p2\\_sample14](#)]: [/p2\\_sample14.html](#) [[news](#)]: [/news.html](#)  
[[mydoc\\_introduction](#)]: [/mydoc\\_introduction.html](#) [[p1\\_landing\\_page](#)]:  
[/p1\\_landing\\_page.html](#) [[p2\\_landing\\_page](#)]: [/p2\\_landing\\_page.html](#)



# Images

**Summary:** Store images in the images folder and use the image.html include to insert images. This include has several options, including figcaptions, that extract the content from the formatting.

## Image Include Template

Instead of using Markdown or HTML syntax directly in your page for images, the syntax for images has been extracted out into an image include that allows you to pass the parameters you need. Include the image.html like this:

```
{% include image.html file="jekyll.png" url="http://jekyllrb.com" alt="Jekyll" caption="This is a sample caption" %}
```

The available include properties are as follows:

Property	description
file	The name of the file. Store it in the /images folder.
url	Whether to link the image to a URL
alt	Alternative image text for accessibility and SEO
caption	A caption for the image
max-width	a maximum width for the image (in pixels). Just specify the number, not px.

The properties of the include get populated into the image.html template.

Here's the result:

Jekyll

*This is a sample caption*

## SVG Images

You can also embed SVG graphics. If you use SVG, you need to use the HTML syntax so that you can define a width/container for the graphic. Here's a sample embed:

```
{% include image.html file="helpapi.svg" url="http://idratherbewriting.com/documentation-theme-jekyll/mydoc_help_api/" alt="Building a Help API" caption="A help API provides a JSON file at a web URL with content that can be pulled into different targets" max-width="600" %}
```

Here's the result:

### Building a Help API


*A help API provides a JSON file at a web URL with content that can be pulled into different targets*

The stylesheet even handles SVG display in IE 9 and earlier through the following style (based on this [gist \(https://gist.github.com/larrybotha/7881691\)](https://gist.github.com/larrybotha/7881691)):

```
/*
 * Let's target IE to respect aspect ratios and sizes for img tags containing SVG files
 *
 * [1] IE9
 * [2] IE10+
 */
/* 1 */
.ie9 img[src$=".svg"] {
    width: 100%;
}
/* 2 */
@media screen and (-ms-high-contrast: active), (-ms-high-contrast: none) {
    img[src$=".svg"] {
        width: 100%;
    }
}
```

Also, if you're working with SVG graphics, note that Firefox does not support SVG fonts. In Illustrator, when you do a Save As with your AI file and choose SVG, to preserve your fonts, in the Font section, select "Convert to outline" as the Type (don't choose SVG in the Font section).

Also, remove the check box for "Use textpath element for text on a path". And select "Embed" rather than "Link." The following screenshot shows the settings I use. Your graphics will look great in Firefox.

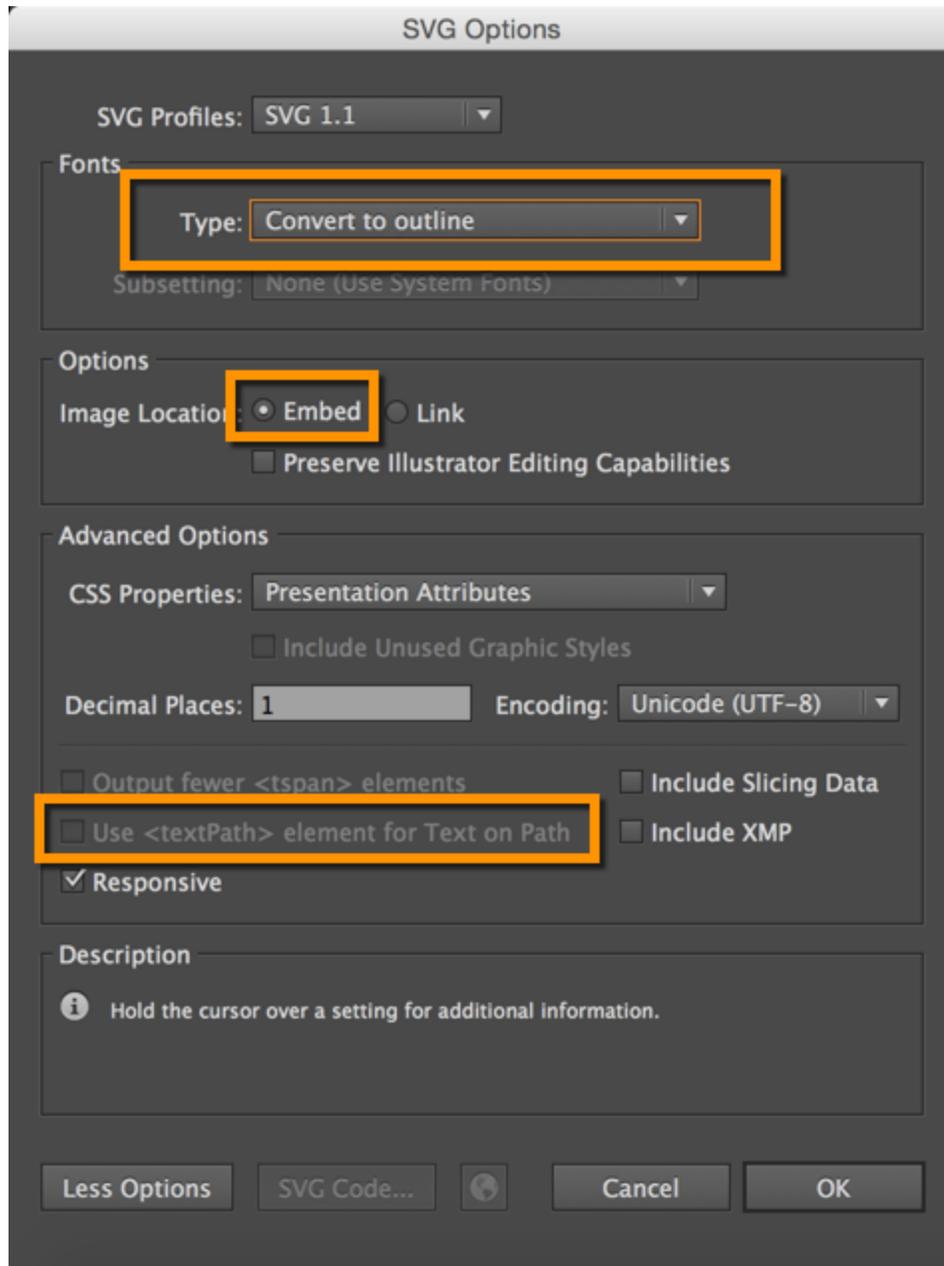

# Labels

**Summary:** Labels are just a simple Bootstrap component that you can include in your pages as needed. They represent one of many Bootstrap options you can include in your theme.

## About labels

Labels might come in handy for adding button-like tags next to elements, such as POST, DELETE, UPDATE methods for endpoints. You can use any classes from Bootstrap in your content.

```
<span class="label label-default">Default</span>  
<span class="label label-primary">Primary</span>  
<span class="label label-success">Success</span>  
<span class="label label-info">Info</span>  
<span class="label label-warning">Warning</span>  
<span class="label label-danger">Danger</span>
```

**Default** **Primary** **Success** **Info** **Warning** **Danger**

You can have a label appear within a heading simply by including the span tag in the heading. However, you can't mix Markdown syntax with HTML, so you'd have to hard-code the heading ID for the auto-TOC to work.

## Links

**Summary:** When creating links, you can use standard HTML or Markdown formatting. Note that this approach is susceptible to errors and broken links, so check your outputs for broken links.

### Create an external link

When linking to an external site, use Markdown formatting because it's simplest:

```
[Google](http://google.com)
```

If you need to use HTML, use the normal syntax:

```
<a href="http://google.com">Google</a>
```

### Linking to internal pages

When linking to internal pages, you can use this same syntax:

```
[Sample](/mydoc-pdf/permalink)
```

OR

```
<a href="/mydoc-pdf/permalink">page</a>
```

### Managed Links

You can also adopt an indirect-reference systems for managing links.

## Navtabs

**Summary:** Navtabs provide a tab-based navigation directly in your content, allowing users to click from tab to tab to see different panels of content. Navtabs are especially helpful for showing code samples for different programming languages. The only downside to using navtabs is that you must use HTML instead of Markdown.

### Common uses

Navtabs are particularly useful for scenarios where you want to show a variety of options, such as code samples for Java, .NET, or PHP, on the same page.

While you could resort to single-source publishing to provide different outputs for each unique programming language or role, you could also use navtabs to allow users to select the content you want.

Navtabs are better for SEO since you avoid duplicate content and drive users to the same page.

### Navtabs demo

The following is a demo of a navtab. Refresh your page to see the tab you selected remain active.

[Profile](#) [About](#) [Match](#)

---

### Profile

Praesent sit amet fermentum leo. Aliquam feugiat, nibh in u ltrices mattis, felis ipsum venenatis metus, vel vehicula libero mauris a enim. Sed placerat est ac lectus vestibulum tempor. Quisque ut condimentum massa. Proin venenatis leo id urna cursus blandit. Vivamus sit amet hendrerit metus.

## Code

Here's the code for the above (with the filler text abbreviated):

```
<ul id="profileTabs" class="nav nav-tabs">
  <li class="active"><a href="#profile" data-toggle="tab">Pro
file</a></li>
  <li><a href="#about" data-toggle="tab">About</a></li>
  <li><a href="#match" data-toggle="tab">Match</a></li>
</ul>
<div class="tab-content">
<div role="tabpanel" class="tab-pane active" id="profile">
  <h2>Profile</h2>
<p>Praesent sit amet fermentum leo....</p>
</div>

<div role="tabpanel" class="tab-pane" id="about">
  <h2>About</h2>
  <p>Lorem ipsum ...</p></div>

<div role="tabpanel" class="tab-pane" id="match">
  <h2>Match</h2>
  <p>Vel vehicula ....</p>
</div>
</div>
```

## Design constraints

Bootstrap automatically clears any floats after the navtab. Make sure you aren't trying to float any element to the right of your navtabs, or there will be some awkward space in your layout.

## Appearance in the mini-TOC

If you put a heading in the navtab content, that heading will appear in the mini-TOC as long as the heading tag has an ID. If you don't want the headings for each navtab section to appear in the mini-TOC, omit the ID attribute from the heading tag. Without this ID attribute in the heading, the mini-TOC won't insert the heading title into the mini-TOC.

## Must use HTML

You must use HTML within the navtab content because each navtab section is surrounded with HTML, and you can't use Markdown inside of HTML.

## Match up ID tags

Each tab's `href` attribute must match the `id` attribute of the tab content's `div` section. So if your tab has `href="#acme"`, then you add `acme` as the ID attribute in `<div role="tabpanel" class="tab-pane" id="acme">`.

## Set an active tab

One of the tabs needs to be set as active, depending on what tab you want to be open by default (usually the first one).

```
<div role="tabpanel" class="tab-pane active" id="acme">
```

## Sets a cookie

The navtabs are part of Bootstrap, but this theme sets a cookie to remember the last tab's state. The `js/customscripts.js` file has a long chunk of JavaScript that sets the cookie. The JavaScript comes from [this StackOverflow thread](http://stackoverflow.com/questions/10523433/how-do-i-keep-the-current-tab-active-with-twitter-bootstrap-after-a-page-reload) (<http://stackoverflow.com/questions/10523433/how-do-i-keep-the-current-tab-active-with-twitter-bootstrap-after-a-page-reload>)

By setting a cookie, if the user refreshes the page, the active tab is the tab the user last selected (rather than defaulting to the default active tab).

## Functionality to implement

One piece of functionality I'd like to implement is the ability to set site-wide nav tab options. For example, if the user always chooses PHP instead of Java in the code samples, it would be great to set this option site-wide by default. However, this functionality isn't yet coded.

## Tables

**Summary:** You can format tables using either multimarkdown syntax or HTML. You can also use jQuery datatables (a plugin) if you need more robust tables.

### Multimarkdown Tables

You can use Multimarkdown syntax for tables. The following shows a sample:

```
Column 1 | Column 2
-----|-----
cell 1a | cell 1b
cell 2a | cell 2b
```

This renders to the following:

Column 1	Column 2
cell 1a	cell 1b
cell 2a	cell 2b

### jQuery datables

You also have the option of using a [jQuery datatable](https://www.datatables.net/) (<https://www.datatables.net/>), which gives you some more options. If you want to use a jQuery datatable, then add `datatable: true` in a page's frontmatter. This will load the right jQuery datatable scripts for the table on that page only (rather than loading the scripts on every page of the site.)

Also, you need to add this script to trigger the jQuery table on your page:

```
<script>
$(document).ready(function(){
    $('table.display').DataTable( {
        paging: true,
        stateSave: true,
        searching: true
    }
    );
});
</script>
```

The available options for the datatable are described in the [datatable documentation](https://www.datatables.net/manual/options) (<https://www.datatables.net/manual/options>), which is excellent.

Additionally, you must add a class of `display` to your tables. (You can change the class, but then you'll need to change the trigger above from `table.display` to whatever class you want to you. You might have different triggers with different options for different tables.)

Since Markdown doesn't allow you to add classes to tables, you'll need to use HTML for any datatables. Here's an example:

```
<table id="sampleTable" class="display">
  <thead>
    <tr>
      <th>Parameter</th>
      <th>Description</th>
      <th>Type</th>
      <th>Default Value</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <td>Parameter 1</td>
      <td>Sample description
      </td>
      <td>Sample type</td>
      <td>Sample default value</td>
    </tr>
    <tr>
      <td>Parameter 2</td>
      <td>Sample description
      </td>
      <td>Sample type</td>
      <td>Sample default value</td>
    </tr>
    <tr>
      <td>Parameter 3</td>
      <td>Sample description
      </td>
      <td>Sample type</td>
      <td>Sample default value</td>
    </tr>
    <tr>
      <td>Parameter 4</td>
      <td>Sample description
      </td>
      <td>Sample type</td>
      <td>Sample default value</td>
    </tr>
  </tbody>
</table>
```

This renders to the following:

Food	Description	Category	Sample type
Apples	A small, somewhat round and often red-colored, crispy fruit grown on trees.	Fruit	Fuji
Bananas	A long and curved, often-yellow, sweet and soft fruit that grows in bunches in tropical climates.	Fruit	Snow
Kiwis	A small, hairy-skinned sweet fruit with green-colored insides and seeds.	Fruit	Golden
Oranges	A spherical, orange-colored sweet fruit commonly grown in Florida and California.	Fruit	Navel

Notice a few features:

- You can keyword search the table. When you type a word, the table filters to match your word.
- You can sort the column order.
- You can page the results so that you show only a certain number of values on the first page and then require users to click next to see more entries.

Read more of the [datatable documentation](https://www.datatables.net/manual/options) (<https://www.datatables.net/manual/options>) to get a sense of the options you can configure. You should probably only use datatables when you have long, massive tables full of information.

**Note:** Try to keep the columns to 3 or 4 columns only. If you add 5+ columns, your table may create horizontal scrolling with the theme. Additionally, keep the column heading titles short.

## Syntax highlighting

**Summary:** You can apply syntax highlighting to your code. This theme uses pygments and applies color coding based on the lexer you specify.

### About syntax highlighting

For syntax highlighting, use fenced code blocks optionally followed by the language syntax you want:

```
```ruby
  def foo
    puts 'foo'
  end
```
```

This looks as follows:

```
def foo
  puts 'foo'
end
```

Fenced code blocks require a blank line before and after.

If you're using an HTML file, you can also use the `highlight` command with Liquid markup:

```
{% highlight ruby %}
  def foo
    puts 'foo'
  end
{% endhighlight %}
```

It renders the same:

```
def foo
  puts 'foo'
end
```

The theme has syntax highlighting specified in the configuration file as follows:

```
highlighter: rouge
```

The syntax highlighting is done via the `css/syntax.css` file.

## Available lexers

The keywords you must add to specify the highlighting (in the previous example, `ruby`) are called “lexers.” You can search for “lexers.” Here are some common ones I use:

- `js`
- `html`
- `yaml`
- `css`
- `json`
- `php`
- `java`
- `cpp`
- `dotnet`
- `xml`
- `http`

## Commenting on files

**Summary:** You can add a button to your pages that allows people to add comments.

### About the review process

If you're using the doc as code approach, you might also consider using the same techniques for reviewing the doc as people use in reviewing code. This approach will involve using Github to edit the files.

There's an Edit me button on each page on this theme. This button allows collaborators to edit the content on Github.

Here's the code for that button on the page.html layout:

```
{% unless jekyll.environment == "production" %}

  {% if site.github_editme_path %}

    <a target="_blank" href="https://github.com/{{site.github_e
ditme_path}}/{{page.folder}}{{page.url | append: ".md"}}{% endi
f %}" class="btn btn-default githubEditButton" role="butto
n"><i class="fa fa-github fa-lg"></i> Edit me</a>
```

This code is only active if you're publishing in a development environment, which is the default.

To activate the production environment, add the [production environment flag](http://jekyllrb.com/docs/configuration/) (<http://jekyllrb.com/docs/configuration/>) in your build command:

```
JEKYLL_ENV=production jekyll serve
```

In your configuration file, edit the value for `github_editme_path`. For example, you might create a branch called "reviews" on your Github repo. Then you would add something like this in your configuration file for the 'github\_editme\_path':

tomjohnson1492/documentation-theme-jekyll/edit/reviews. Here “tomjohnson1492” is my github account name. The repo name is “documentation-theme-jekyll”. The “reviews” name is the branch.

## Add reviewers as collaborators

If you want people to collaborate on your project so that their edits get committed to a branch on your project, you need to add them as collaborators. For your Github repo, click **Settings** and add the collaborators on the Collaborators tab using their Github usernames.

If you don't want to allow anyone to commit to your Github branch, don't add the reviewers as collaborators. When someone makes an edit, Github will fork the theme. The person's edit then will appear as a pull request to your repo. You can then choose to merge the change indicated in the pull or not.

**Note:** When you process pull requests, you have to accept everything or nothing. You can't pick and choose which changes you'll merge. Therefore you'll probably want to edit the branch you're planning to merge or ask the contributor to make some changes to the fork before processing the pull request.

## Workflow

Users will make edits in your “reviews” branch (or whatever you want to call it). You can then commit those edits as you make updates.

When you're finished making all updates in the branch, you can merge the branch into the master.

Note that if you're making updates online, those updates will be out of sync with any local edits.

**Warning:** Don't make edits both online using Github's browser-based interface AND offline on your local machine using your local tools. When you try to push from your local, you'll likely get a merge conflict error. Instead, make sure you do a pull and update on your local after making any edits online.

## Prose.io

Prose.io is an overlay on Github that would allow people to make comments in an easier interface. If you simply go to [prose.io \(http://prose.io\)](http://prose.io), it asks to authorize your Github account, and so it will read files directly from Github but in the Prose.io interface.

## Build arguments

**Summary:** You use various build arguments with your Jekyll project. You can also create shell scripts to act as shortcuts for long build commands. You can store the commands in iTerm as profiles as well.

### How to build Jekyll sites

The normal way to build the Jekyll site is through the build command:

```
jekyll build
```

To build the site and view it in a live server so that Jekyll rebuilds that site each time you make a change, use the `serve` command:

```
jekyll serve
```

By default, the `_config.yml` in the root directory will be used, Jekyll will scan the current directory for files, and the folder `_site` will be used as the output. You can customize these build commands like this:

```
jekyll serve --config configs/myspecialconfig.yml --destination ../doc_outputs
```

Here the `configs/myspecialconfig.yml` file is used instead of `_config.yml`. The destination directory is `../doc_outputs`, which would be one level up from your current directory.

### Shortcuts for the build arguments

If you have a long build argument and don't want to enter it every time in Jekyll, noting all your configuration details, you can create a shell script and then just run the script. Simply put the build argument into a text file and save it with the `.sh` extension (for Mac) or `.bat` extension (for Windows). Then run it like this:

```
. myscript.sh
```

My preference is to add the scripts to profiles in iTerm. See [iTerm Profiles \(page 0\)](#) for more details.

## Stop a server

When you're done with the preview server, press **Ctrl+C** to exit out of it. If you exit iTerm or Terminal without shutting down the server, the next time you build your site, or if you build multiple sites with the same port, you may get a server-already-in-use message.

You can kill the server process using these commands:

```
ps aux | grep jekyll
```

Find the PID (for example, it looks like "22298").

Then type `kill -9 22298` where "22298" is the PID.

To kill all Jekyll instances, use this:

```
kill -9 $(ps aux | grep '[j]ekyll' | awk '{print $2}')
```

I recommend creating a profile in iTerm that stores this command. Here's what the iTerm settings look like:

General Colors Text Window Terminal Session Keys Advanced

**Basics**

Name: Kill all Jekyll

Shortcut key: ^⌘

Tags: Example: linux, dark bg, tall window

**Command**

Login shell

Command:

Send text at start: kill -9 \$(ps aux | grep '[j]ekyll' | awk '{print \$2}')

**Working Directory**

Home directory

Reuse previous session's directory

Directory: /Users/tjohnson/projects/docs

Advanced Configuration [Edit...](#)

**URL Schemes**

Schemes handled: Select URL Schemes...

## Themes

**Summary:** You can choose between two different themes (one green, the other blue) for your projects. The theme CSS is stored in the CSS folder and configured in the configuration file for each project.

### Theme options

You can choose a green or blue theme, or you can create your own. In the css folder, there are two theme files: theme-blue.css and theme-green.css. These files have the most common CSS elements extracted in their own CSS file. Just change the hex colors to the ones you want.

In the \_includes/head.html file, specify the theme file you want the output to use — for example, theme\_file: theme-green.css . See this line:

```
<link rel="stylesheet" href="/mydoc-pdf/css/theme-green.css">
```

### Theme differences

The differences between the themes is fairly minimal. The main navigation bar, sidebar, buttons, and heading colors change color. That's about it.

In a more sophisticated theming approach, you could use Sass files to generate rules based on options set in a data file, but I kept things simple here.

# Generating PDFs

**Summary:** You can generate a PDF from your Jekyll project. You do this by creating a web version of your project that is printer friendly. You then use utility called Prince to iterate through the pages and create a PDF from them. It works quite well and gives you complete control to customize the PDF output through CSS, including page directives and dynamic tags from Prince.

## PDF overview

This process for creating a PDF relies on Prince XML to transform the HTML content into PDF. Prince costs about \$500 per license. That might seem like a lot, but if you're creating a PDF, you're probably working for a company that sells a product, so you likely have access to some resources.

The basic approach is to generate a list of all pages that need to be added to the PDF, and then add leverage Prince to package them up into a PDF.

It may seem like the setup is somewhat cumbersome, but it doesn't take long. Once you set it up, building a pdf is just a matter of running a couple of commands.

Also, creating a PDF this way gives you a lot more control and customization capabilities than with other methods for creating PDFs. If you know CSS, you can entirely customize the output.

## Demo

You can see an example of the finished product here:

 PDF Download

## 1. Set up Prince

Download and install [Prince](http://www.princexml.com/doc/installing/) (<http://www.princexml.com/doc/installing/>).

You can install a fully functional trial version. The only difference is that the title page will have a small Prince PDF watermark.

## 2. Create a new configuration file for each of your PDF targets

The PDF configuration file will build on the settings in the regular configuration file but will have some additional fields. Here's the configuration file for the mydoc product within this theme. This configuration file is located in the pdfconfigs folder.

```
destination: _site/
url: "http://127.0.0.1:4010"
baseurl: "/mydoc-pdf"
port: 4010
output: pdf
product: mydoc
print_title: Jekyll theme for documentation – mydoc product
print_subtitle: version 5.0
output: pdf
defaults:
  -
    scope:
      path: ""
      type: "pages"
    values:
      layout: "page_print"
      comments: true
      search: true
```

**Note:** Although you're creating a PDF, you must still build an HTML web target before running Prince. Prince will pull from the HTML files and from the file-list for the TOC.

Note that the default page layout specified by this configuration file is `page_print`. This layout strips out all the sections that shouldn't appear in the print PDF, such as the sidebar and top navigation bar.

Also note that there's a `output: pdf` toggle in case you want to make some of your content unique to PDF output. For example, you could add conditional logic that checks whether `site.output` is `pdf` or `web`. If it's `pdf`, then include information only for the PDF, and so on. If you're using nav tabs, you'll definitely want to create an alternative experience in the PDF.

In the configuration file, customize the values for the `print_title` and `print_subtitle` that you want. These will appear on the title page of the PDF.

### 3. Make sure your `sidebar_doc.yml` file has a `titlepage.html` and `tocpage.html`

There are two template pages in the root directory that are critical to the PDF:

- `titlepage.html`
- `tocpage.html`

These pages should appear in your sidebar YML file (in this product, `mydoc_sidebar.yml`):

```
- title:
  output: pdf
  type: frontmatter
  folderitems:
  - title:
    url: /titlepage/
    output: pdf
    type: frontmatter
  - title:
    url: /tocpage/
    output: pdf
    type: frontmatter
```

Leave these pages here in your sidebar. (The `output: pdf` property means they won't appear in your online TOC because the conditional logic of the `sidebar.html` checks whether `web` is equal to `pdf` or not before including the item in the web version of the content.)

The code in the `tocpage.html` is mostly identical to that of the `sidebar.html` page. This is essential for Prince to create the page numbers correctly with cross references.

There's another file (in the root directory of the theme) that is critical to the PDF generation process: `prince-list.txt`. This file simply iterates through the items in your sidebar and creates a list of links. Prince will consume the list of links from `prince-list.txt` and create a running PDF that contains all of the pages listed, with appropriate cross references and styling for them all.

**Note:** If you have any files that you do not want to appear in the PDF, add `output: web` (rather than `output: pdf`) in the list of attributes in your sidebar. The `prince-list.txt` file that loops through the `mydoc_sidebar.yml` file to grab the URLs of each page that should appear in the PDF will skip over any items that do not list `output: pdf` in the item attributes. For example, you might not want your tag archives to appear in the PDF, but you probably will want to list them in the online help navigation.

## 4. Customize your headers and footers

Open up the `css/printstyles.css` file and customize what you want for the headers and footers. At the very least, customize the email address ( `youremail@domain.com` ) that appears in the bottom left.

Exactly how the print styling works here is pretty nifty. You don't need to understand the rest of the content in this section unless you want to customize your PDFs to look different from what I've configured. But I'm adding this information here in case you want to understand how to customize the look and feel of the PDF output.

This style creates a page reference for a link:

```
a[href]::after {
  content: " (page " target-counter(attr(href), page) )"
}
```

You don't want cross references for any link that doesn't reference another page, so this style specifies that the content after should be blank:

```
a[href*="mailto"]::after, a[data-toggle="tooltip"]::after, a[hr
ef].noCrossRef::after {
  content: "";
}
```

**Tip:** If you have a link to a file download, or some other link that shouldn't have a cross reference (such as link used in JavaScript for navtabs or collapsible sections, for example, add `noCrossRef` as a class to the link to avoid having it say "page 0" in the cross reference.

This style specifies that after links to web resources, the URL should be inserted instead of the page number:

```
a[href^="http:"]::after, a[href^="https:"]::after {
  content: " (" attr(href) ")";
}
```

This style sets the page margins:

```
@page {
  margin: 60pt 90pt 60pt 90pt;
  font-family: sans-serif;
  font-style:none;
  color: gray;
}
```

To set a specific style property for a particular page, you have to name the page. This allows Prince to identify the page.

First you add frontmatter to the page that specifies the type. For the `titlepage.html`, here's the frontmatter:

```
---
type: title
---
```

For the `tocpage`, here's the frontmatter:

```
---
type: frontmatter
---
```

For the `index.html` page, we have this type tag (among others):

```
---
type: first_page
---
```

The default\_print.html layout will change the class of the `body` element based on the type value in the page's frontmatter:

```
<body class="{% if page.type == "title"%}title{% elsif page.type == "frontmatter" %}frontmatter{% elsif page.type == "first_page" %}first_page{% endif %} print">
```

Now in the `css/printstyles.css` file, you can assign a page name based on a specific class:

```
body.title { page: title }
```

This means that for content inside of `body class="title"`, we can style this page in our stylesheet using `@page title`.

Here's how that title page is styled:

```
@page title {
  @top-left {
    content: " ";
  }
  @top-right {
    content: " "
  }
  @bottom-right {
    content: " ";
  }
  @bottom-left {
    content: " ";
  }
}
```

As you can see, we don't have any header or footer content, because it's the title page.

For the `tocpage.html`, which has the `type: frontmatter`, this is specified in the stylesheet:

```
body.frontmatter { page: frontmatter }
body.frontmatter {counter-reset: page 1}

@page frontmatter {
  @top-left {
    content: prince-script(guideName);
  }
  @top-right {
    content: prince-script(datestamp);
  }
  @bottom-right {
    content: counter(page, lower-roman);
  }
  @bottom-left {
    content: "youremail@domain.com"; }
}
```

With `counter(page, lower-roman)`, we reset the page count to 1 so that the title page doesn't start the count. Then we also add some header and footer info. The page numbers start counting in lower-roman numerals.

Finally, for the first page (which doesn't have a specific name), we restart the counting to 1 again and this time use regular numbers.

```
body.first_page {counter-reset: page 1}

h1 { string-set: doctitle content() }

@page {
  @top-left {
    content: string(doctitle);
    font-size: 11px;
    font-style: italic;
  }
  @top-right {
    content: prince-script(datestamp);
    font-size: 11px;
  }

  @bottom-right {
    content: "Page " counter(page);
    font-size: 11px;
  }
  @bottom-left {
    content: prince-script(guideName);
    font-size: 11px;
  }
}
```

You'll see some other items in there such as `prince-script`. This means we're using JavaScript to run some functions to dynamically generate that content. These JavaScript functions are located in the `_includes/head_print.html`:

```
<script>
  Prince.addScriptFunc("datestamp", function() {
    return "PDF last generated: July 03, 2016";
  });
</script>

<script>
  Prince.addScriptFunc("guideName", function() {
    return "Jekyll theme for documentation - mydoc product
User Guide";
  });
</script>
```

There are a couple of Prince functions that are default functions from Prince. This gets the heading title of the page:

```
content: string(doctype);
```

This gets the current page:

```
content: "Page " counter(page);
```

Because the theme uses JavaScript in the CSS, you have to add the `--javascript` tag in the Prince command (detailed later on this page).

## 5. Customize the PDF script

Duplicate the `pdf-mydocf.sh` file in the root directory and customize it for your specific configuration files.

```
echo 'Killing all Jekyll instances'
kill -9 $(ps aux | grep '[j]ekyll' | awk '{print $2}')
clear

echo "Building PDF-friendly HTML site for Mydoc ...";
jekyll serve --detach --config _config.yml,pdfconfigs/config_my
doc_pdf.yml;
echo "done";

echo "Building the PDF ...";
prince --javascript --input-list=_site/pdfconfigs/prince-list.t
xt -o _pdf/mydoc.pdf;
echo "done";
```

Note that the first part kills all Jekyll instances. This way you won't try to serve Jekyll at a port that is already occupied.

The `jekyll serve` command serves up the HTML-friendly PDF configurations for our two projects. This web version is where Prince will go to get its content.


The `prince` script issues a command to the Prince utility. JavaScript is enabled (`--javascript`), and we tell it exactly where to find the list of files (`--input-list`) — just point to the `prince-list.txt` file. Then we tell it where and what to output (`-o`).

Make sure that the path to the `prince-list.txt` is correct. For the output directory, I like to output the PDF file into my project's source (into the `files` folder). Then when I build the web output, the PDF is included and something I can refer to.

**Note:** You might not want to include the PDF in your project files, since you're likely committing the PDF to Github and as a result saving the changes from one PDF version to another with each save.

## 6. Add conditions for your new builds in the sidebarconfigs.html file

In the `_includes/custom/sidebarconfigs.html` file, there's a section that looks like this:



Add your own condition here that points to your sidebar.

What this does is allow the `prince-list.txt` and `toc.html` files to use a variable for the sidebar (called `sidebar_pdf`) when iterating through the sidebar. Otherwise, you would need to create a unique `prince-list.txt` and `toc.html` file for each separate PDF output you have.

## 7. Add a download button for the PDF

You can add a download button for your PDF using some Bootstrap button code:

```
<a target="_blank" class="noCrossRef" href="/pdf/mydoc.pdf"><button type="button" class="btn btn-default" aria-label="Left Align"><span class="glyphicon glyphicon-download-alt" aria-hidden="true"></span> PDF Download</button></a>
```

Here's what that looks like:

```
<a target="_blank" class="noCrossRef" href="/mydoc-pdf/pdf/mydoc.pdf">
```

```
  <img alt="Download icon" data-bbox="198 864 215 880"/> PDF Download </a>
```

## JavaScript conflicts

If you have JavaScript on any of your pages, Prince will note errors in Terminal like this:

```
error: TypeError: value is not an object
```

However, the PDF will still build.

You need to conditionalize out any JavaScript from your PDF web output before building your PDFs. Make sure that the PDF configuration files have the `output: pdf` property.

Then surround the JavaScript with conditional tags like this:

```
{% unless site.output == "pdf" %}  
javascript content here ...  
{% endunless %}
```

For more detail about using `unless` in conditional logic, see [Conditional logic \(page 0\)](#). What this code means is “run this code unless this value is the case.”

## Overriding Bootstrap Print Styles

The theme relies on Bootstrap’s CSS for styling. However, for print media, Bootstrap applies the following style:

```
@media print{*,:after,:before{color:#000!important;text-shado  
w:none!important;background:0 0!important;-webkit-box-shadow:no  
ne!important;box-shadow:none!important}
```

This is minified, but basically the `*` (asterisk) means select all, and applied the color `#000` (black). As a result, the Bootstrap style strips out all color from the PDF (for Bootstrap elements).

This is problematic for code snippets that have syntax highlighting. I decided to remove this de-coloring from the print output. I commented out the Bootstrap style:

```
@media print{*,:after,:before{/*color:#000!important;*/text-shadow:none!important;*/background:0 0!important*/;-webkit-box-shadow:none!important;box-shadow:none!important}
```

If you update Bootstrap, make sure you make this edit. (Sorry, admittedly I couldn't figure out how to simply overwrite the `*` selector with a later style.)

I did, however, remove the color from the alerts and lighten the background shading for `pre` elements. The `printstyles.css` has this setting.

## Help APIs and UI tooltips

**Summary:** You can loop through files and generate a JSON file that developers can consume like a help API. Developers can pull in values from the JSON into interface elements, styling them as popovers for user interface text, for example. The beauty of this method is that the UI text remains in the help system (or at least in a single JSON file delivered to the dev team) and isn't hard-coded into the UI.

### Full code demo of content API

You can create a help API that developers can use to pull in content.

For the full code demo, see the notes in the [tooltip demo](#).


In this demo, the popovers pull in and display content from the information in a [tooltips.json \(page 0\)](#) file located in the same directory.

Instead of placing the JSON source in the same directory, you could also host the JSON file on another site.

Additionally, instead of tooltip popovers, you could also print content directly to the page. Basically, whatever you can stuff into a JSON file, developers can integrate it onto a page.

### Diagram overview

Here's a diagram showing the basic idea of the help API:

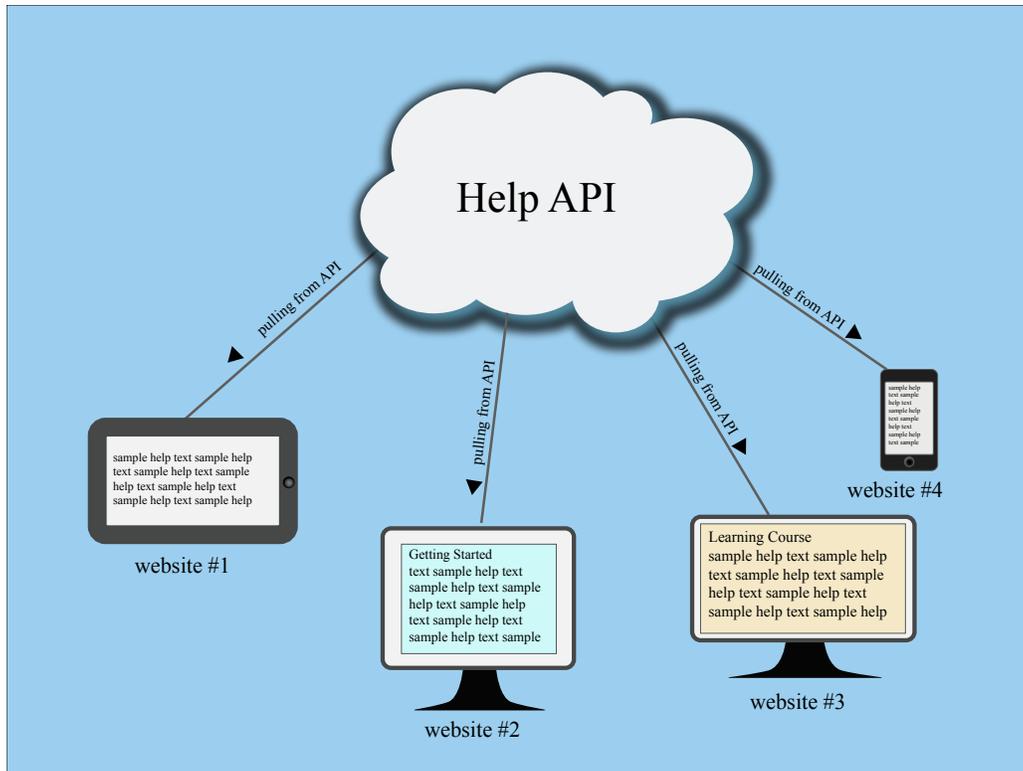

Is this really an API? Well, sort of. The help content is pushed out into a JSON file that other websites and applications can easily consume. The endpoints don't deliver different data based on parameters added to a URL. But the overall concept is similar to an API: you have a client requesting resources from a server.

Note that in this scenario, the help is openly accessible on the web. If you have a private system, it's more complicated.

To deliver help this way using Jekyll, follow the steps in each of the sections below.

## 1. Create a “collection” for the help content

A collection is another content type that extends Jekyll beyond the use of pages and posts. Call the collection “tooltips.”

Add the following information to your configuration file to declare your collection:

```
collections:
  tooltips:
    output: false
```

In your Jekyll project's root directory, create a new folder called “\_tooltips” and put every page that you want to be part of that tooltips collection inside that folder.

In Jekyll, folders that begin with an underscore (“\_”) aren't included in the output. However, in the collection information that you add to your configuration file, if you change `output` to `true`, the tooltips folder will appear in the output, and each page inside tooltips will be generated. You most likely don't want this for tooltips (you just want the JSON file), so make the `output` setting `false`.

## 2. Create tooltip definitions in a YAML file

Inside the `_data` folder, create a YAML file called something like `definitions.yml`. Add the definitions for each of your tooltips here like this:

```
basketball: "Basketball is a sport involving two teams of five
players each competing to put a ball through a small circular r
im 10 feet above the ground. Basketball requires players to be
in top physical condition, since they spend most of the game ru
nning back and forth along a 94-foot-long floor."
```

The definition of basketball is stored this data file so that you can re-use it in other parts of the help as well. You'll likely want the definition to appear not only in the tooltip in the UI, but also in the regular documentation as well.

## 3. Create pages in your collection

Create pages inside your new tooltips collection (that is, inside the `_tooltips` folder). Each page needs to have a unique `id` in the frontmatter as well as a `product`. Then reference the definition you created in the `definitions.yml` file.

Here's an example:

```
````liquid
---
id: basketball
product: mydoc
---

{{site.data.definitions.basketball}}
````
```

You need to create a separate page for each tooltip you want to deliver.

The product attribute is required in the frontmatter to distinguish the tooltips produced here from the tooltips for other products in the same `_tooltips` folder. When creating the JSON file, Jekyll will iterate through all the pages inside `_tooltips`, regardless of any subfolders included here.

## 4. Create a JSON file that loops through your collection pages

Now it's time to create a JSON file with Liquid code that iterates through our tooltip collection and grabs the information from each tooltip file.

Inside your project's pages directory (e.g., `mydoc`), add a file called "tooltips.json." (You can use whatever name you want.) Add the following to your JSON file:

```
---
layout: none
search: exclude
---
{
  "entries":
  [
    {% for page in site.tooltips %}
    {% if page.product == "mydoc" %}
    {
      "id"      : "{{ page.id }}",
      "body": "{{ page.content | strip_newlines | replace: '\',
        '\\\\' | replace: '\"', '\\\"' }}"
    } {% unless forloop.last %},{% endunless %}
    {% endif %}
    {% endfor %}
  ]
}
```

Change "mydoc" to the product name you used in each of the tooltip files. The template here will only include content in the JSON file if it meets the product attribute requirements. We need this `if` statement to prevent tooltips from other products from being included in the JSON file.

This code will loop through all pages in the `tooltips` collection and insert the `id` and `body` into key-value pairs for the JSON code. Here's an example of what that looks like after it's processed by Jekyll in the site build:

```
{
  "entries": [
    {
      "id": "baseball",
      "body": "Baseball is considered America's pasttime sport, though that may be more of a historical term than a current one. There's a lot more excitement about football than baseball. A baseball game is somewhat of a snooze to watch, for the most part."
    },
    {
      "id": "basketball",
      "body": "Basketball is a sport involving two teams of five players each competing to put a ball through a small circular rim 10 feet above the ground. Basketball requires players to be in top physical condition, since they spend most of the game running back and forth along a 94-foot-long floor."
    },
    {
      "id": "football",
      "body": "No doubt the most fun sport to watch, football also manages to accrue the most injuries with the players. From concussions to blown knees, football players have short sport lives."
    },
    {
      "id": "soccer",
      "body": "If there's one sport that dominates the world landscape, it's soccer. However, US soccer fans are few and far between. Apart from the popularity of soccer during the World Cup, most people don't even know the name of the professional soccer organization in their area."
    }
  ]
}
```

You can also view the same JSON file here: [tooltips.json \(page 0\)](#).

You can add different fields depending on how you want the JSON to be structured. Here we just have to fields: `id` and `body`. And the JSON is looking just in the `tooltips` collection that we created.

**Tip:** Check out [Google's style guide](https://google-styleguide.googlecode.com/svn/trunk/jsoncstyleguide.xml) (<https://google-styleguide.googlecode.com/svn/trunk/jsoncstyleguide.xml>) for JSON. These best practices can help you keep your JSON file valid.

Note that you can create different JSON files that specialize in different content. For example, suppose you have some getting started information. You could put that into a different JSON file. Using the same structure, you might add an `if` tag that checks whether the page has frontmatter that says `type: getting_started` or something. Or you could put the content into separate collection entirely (different from tooltips).

By chunking up your JSON files, you can provide a quicker lookup. (I'm not sure how big the JSON file can be before you experience any latency with the jQuery lookup.)

## 5. Build your site and look for the JSON file

When you build your site, Jekyll will iterate through every page in your `_tooltips` folder and put the page id and body into this format. In the output, look for the JSON file in the `tooltips.json` file. You'll see that Jekyll has populated it with content. This is because of the triple hyphen lines in the JSON file — this instructs Jekyll to process the file.

## 6. Allow CORS access to your help if stored on a remote server

You can simply deliver the JSON file to devs to add to the project. But if you have the option, it's best to keep the JSON file stored in your own help system. Assuming you have the ability to update your content on the fly, this will give you completely control over the tooltips without being tied to a specific release window.

When people make calls to your site *from other domains*, you must allow them access to get the content. To do this, you have to enable something called CORS (cross origin resource sharing) within the server where your help resides.

In other words, people are going to be executing calls to reach into your site and grab your content. Just like the door on your house, you have to unlock it so people can get in. Enabling CORS is unlocking it.

How you enable CORS depends on the type of server.

If your server setup allows `htaccess` files to override general server permissions, create an `.htaccess` file and add the following:

```
Header set Access-Control-Allow-Origin "*"
```

Store this in the same directory as your project. This is what I've done in a directory on my web host (bluehost.com). Inside `http://idratherassets.com/wp-content/apidemos/`, I uploaded a file called ".htaccess" with the preceding code.

After I uploaded it, I renamed it to .htaccess, right-clicked the file and set the permissions to 774.

To test whether your server permissions are set correctly, open a terminal and run the following curl command pointing to your tooltips.json file:

```
curl -I http://idratherassets.com/wp-content/apidemos/tooltips.json
```

The `-I` command tells cURL to return the request header only.

If the server permissions are set correctly, you should see the following line somewhere in the response:

```
Access-Control-Allow-Origin: *
```

If you don't see this response, CORS isn't allowed for the file.

If you have an AWS S3 bucket, you can supposedly add a CORS configuration to the bucket permissions. Log into AWS S3 and click your bucket. On the right, in the Permissions section, click **Add CORS Configuration**. In that space, add the following policy:

```
<CORSConfiguration>
  <CORSRule>
    <AllowedOrigin>*</AllowedOrigin>
    <AllowedMethod>GET</AllowedMethod>
  </CORSRule>
</CORSConfiguration>
```

(Although this should work, in my experiment it doesn't. And I'm not sure why...)

In other server setups, you may need to edit one of your Apache configuration files. See [Enable CORS \(http://enable-cors.org/server.html\)](http://enable-cors.org/server.html) or search online for ways to allow CORS for your server.

If you don't have CORS enabled, users will see a CORS error/warning message in the console of the page making the request.

✔ **Tip:** If enabling CORS is problematic, you could always just send developers the `tooltips.json` file and ask them to place it on their own server.

## 7. Explain how developers can access the help

Developers can access the help using the `.get` method from jQuery, among other methods. Here's an example of how to get a page with the ID of `basketball` :

```
<script type="text/javascript">
$(document).ready(function(){

var url = "mydoc_tooltips_source.json";

$.get( url, function( data ) {

    $.each(data.entries, function(i, page) {
        if (page.id == "basketball") {
            $( "#basketball" ).attr( "data-content", page.body
);
        }
    });
});
});
</script>
```

View the [tooltip demo](#) for a demo.

The `url` in the demo is relative, but you could equally point it to an absolute path on a remote host assuming CORS is enabled on the host.

The `each` method looks through all the JSON content to find the item whose `page.id` is equal to `basketball` . It then looks for an element on the page named `#basketball` and adds a `data-content` attribute to that element.

⚠ **Warning:** Make sure your JSON file is valid. Otherwise, this method won't work. I use the [JSON Formatter extension for Chrome](#)

(<https://chrome.google.com/webstore/detail/json-formatter/bcjindcccaagfpajjjmafapmmgkkhgoa?hl=en>)

. When I go to the `tooltips.json` page in my browser, the JSON content — if valid — is nicely formatted (and includes some color coding). If the file isn't valid, it's not formatted and there isn't any color. You can also check the JSON formatting using [JSON Formatter and Validator](http://jsonformatter.curiousconcept.com/) (<http://jsonformatter.curiousconcept.com/>). If your JSON file isn't valid, identify the problem area using the validator and troubleshoot the file causing issues. It's usually due to some code that isn't escaping correctly.

Why `data-content` ? Well, in this case, I'm using [Bootstrap popovers](http://getbootstrap.com/javascript/#popovers) (<http://getbootstrap.com/javascript/#popovers>) to display the tooltip content. The `data-content` attribute is how Bootstrap injects popovers.

Here's the section on the page where the popover is inserted:

```
<p>Basketball <span class="glyphicon glyphicon-info-sign" id="basketball" data-toggle="popover"></span></p>
```

Notice that I just have `id="basketball"` added to this popover element. Developers merely need to add a unique ID to each tooltip they want to pull in the help content. Either you tell developers the unique ID they should add, or ask them what IDs they added (or just tell them to use an ID that matches the field's name).

In order to use jQuery and Bootstrap, you'll need to add the appropriate references in the head tags of your page:

```
<link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.2/css/bootstrap.min.css">
<script src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.2/js/bootstrap.min.js"></script>

<script type="text/javascript">
$(document).ready(function(){
    $('[data-toggle="popover"]').popover({
        placement : 'right',
        trigger: 'hover',
        html: true
    });
});
```

Again, see the [Tooltip Demo](#) for a demo of the full code.

Note that even though you reference a Bootstrap JS script, Bootstrap's popovers require you to initialize them using the above code as well — they aren't turned on by default.

View the source code of the [tooltip demo](#) for the full comments.

## 8. Create easy links to embed the help in your help site

You might also want to insert the same content into different parts of your help site. For example, if you have tooltips providing definitions for fields, you'll probably want to create a page in your help that lists those same definitions.

You could use the same method developers use to pull help content into their applications. But it will probably be easier to simply use Jekyll's tags for doing it.

Here's how you would reuse the content:

```
<h2>Reuse Demo</h2>

<table>
<thead>
<tr>
<th>Sport</th>
<th>Comments</th>
</tr>
</thead>
<tbody>

<tr>
<td>Basketball</td>
<td>{{site.data.definitions.basketball}}</td>
</tr>

<tr>
<td>Baseball</td>
<td>{{site.data.definitions.baseball}}</td>
</tr>

<tr>
<td>Football</td>
<td>{{site.data.definitions.football}}</td>
</tr>

<tr>
<td>Soccer</td>
<td>{{site.data.definitions.soccer}}</td>
</tr>
</tbody>
</table>
```

And here's the code:

## Reuse Demo

<b>Sport</b>	<b>Comments</b>
Basketball	Basketball is a sport involving two teams of five players each competing to put a ball through a small circular rim 10 feet above the ground. Basketball requires players to be in top physical condition, since they spend most of the game running back and forth along a 94-foot-long floor.
Baseball	Baseball is considered America's pasttime sport, though that may be more of a historical term than a current one. There's a lot more excitement about football than baseball. A baseball game is somewhat of a snooze to watch, for the most part.
Football	No doubt the most fun sport to watch, football also manages to accrue the most injuries with the players. From concussions to blown knees, football players have short sport lives.
Soccer	If there's one sport that dominates the world landscape, it's soccer. However, US soccer fans are few and far between. Apart from the popularity of soccer during the World Cup, most people don't even know the name of the professional soccer organization in their area.

Now you have both documentation and UI tooltips generated from the same definitions file.

## Search configuration

**Summary:** The search feature uses JavaScript to look for keyword matches in a JSON file. The results show instant matches, but it doesn't provide a search results page like Google. Also, sometimes invalid formatting can break the JSON file.

### About search

The search is configured through the `search.json` file in the root directory. The search is a simple search that looks at content in pages. It looks at titles, summaries, keywords, and tags.

However, the search doesn't work like google — you can't hit return and see a list of results on the search results page, with the keywords in bold. Instead, this search shows a list of page titles that contain keyword matches. It's fast, but simple.

### Excluding pages from search

By default, every page is included in the search. Depending on the type of content you're including, you may find that some pages will break the JSON formatting. If that happens, then the search will no longer work.

If you want to exclude a page from search add `search: exclude` in the page's frontmatter.

### Troubleshooting search

You should exclude any files from search that you don't want appearing in the search results. For example, if you have a `tooltips.json` file or `prince-list.txt`, don't include it, as the formatting will break the JSON format.

If any formatting in the `search.json` file is invalid (in the build), search won't work. You'll know that search isn't working if no results appear when you start typing in the search box.

If this happens, go directly to the `search.json` file in your browser, and then copy the content. Go to a [JSON validator \(http://jsonlint.com/\)](http://jsonlint.com/) and paste in the content. Look for the line causing trouble. Edit the file to either exclude the page from search or fix the syntax so that it doesn't invalidate the JSON. (Note that tabs in the body will invalidate JSON.)

The `search.json` file already tries to strip out content that would otherwise make the JSON invalid.

## Including the body field in search

I've found that include the `body` field in the search creates too many problems, and so I've removed `body` from the search. You can see the results of including the `body` by adding this along with the other fields in `search.json`:

```
"body": "{ { page.content | strip_html | strip_newlines |
replace: '\\', '\\\\' | replace: '\"', '\\\"' | replace: '^t',
'    ' } }",
```

Note that the last replace, `| replace: '^t', ' '`, looks for any tab character and replaces it with four spaces. (Tab characters invalidate JSON.) If you run into other problematic formatting, you can use regex expressions to find and replace the content. See [Regular Expressions \(http://www.ultraedit.com/support/tutorials\\_power\\_tips/ultraedit/regular\\_expressions.html\)](http://www.ultraedit.com/support/tutorials_power_tips/ultraedit/regular_expressions.html) for details on finding and replacing code.

It's possible that the formatting may not account for all the scenarios that would invalidate the JSON. (Sometimes it's an extra comma after the last item that makes it invalid.)

Note that including the `body` in the search creates other problems as well. The search results show the most immediate matches in the JSON file. If several topics have matches for the keyword in the body, these matches might appear before other files that have matches in the title, summary, or keywords. This is because this simple search does not provide any weighting mechanisms for the content.

## Customizing search results

At some point, you may want to customize the search results more. Here's a little more detail that will be helpful. The `search.json` file retrieves various page values:

```
---
title: search
layout: none
search: exclude
---

[
{% for page in site.pages %}
{% unless page.search == "exclude" %}
{
"title": "{{ page.title | escape }}",
"tags": "{{ page.tags }}",
"keywords": "{{page.keywords}}",
"url": "{{ page.url | prepend: site.baseurl }}",
"summary": "{{page.summary | strip }}"
},
{% endunless %}
{% endfor %}

{% for post in site.posts %}

{
"title": "{{ post.title | escape }}",
"tags": "{{ post.tags }}",
"keywords": "{{post.keywords}}",
"url": "{{ post.url | prepend: site.baseurl }}",
"summary": "{{post.summary | strip }}"
}
{% unless forloop.last %},{% endunless %}
{% endfor %}

]
```

The `_includes/topnav.html` file then makes use of these values:

```
<li>
  <!--start search-->
  <div id="search-demo-container">
    <input type="text" id="search-input" placeholder="search...">
    <ul id="results-container"></ul>
  </div>
  <script src="/mydoc-pdf/js/jekyll-search.js" type="text/javascript"></script>
  <script type="text/javascript">
    SimpleJekyllSearch.init({
      searchInput: document.getElementById('search-input'),
      resultsContainer: document.getElementById('results-container'),
      dataSource: '/mydoc-pdf/search.json',
      searchResultTemplate: '<li><a href="{url}" title="Search configuration">{title}</a></li>',
      noResultsText: 'No results found.',
      limit: 10,
      fuzzy: true,
    })
  </script>
  <!--end search-->
</li>
```

Where you see `{url}` and `{title}`, the search is retrieving the values for these as specified in the `search.json` file.

## More robust search

For more robust search, consider integrating either [Algolia](http://algolia.com) (<http://algolia.com>) or [Swiftype](http://swiftype.com) (<http://swiftype.com>).

## iTerm profiles

**Summary:** You can set up profiles in iTerm to facilitate the build process with just a few clicks. This can make it a lot easier to quickly build multiple outputs.

### About iTerm profiles

When you're working with tech docs, a lot of times you have builds that push files onto different servers, or that build the content for different environments. It can be a hassle to type out these commands each time. Instead, it's easier to configure iTerm with profiles that initiate the scripts.

### Set up profiles


1. Open iTerm and go to **Profiles > Open Profiles**.
2. Click **Edit Profiles**.
3. Click the + button in the lower-left corner to create a new profile.
4. In the **Name** field, type a name describing the output, such as `Doc theme -- designers`.
5. In the **Send text at start** field, type the command for the build script, such as this:

```
JEKYLL_ENV=production jekyll serve
```

Leave the Login shell option selected.

6. In the Working Directory section, select **Directory** and enter the directory for your project, such as `/Users/tjohnson/projects/documentation-theme-jekyll`.
7. Close the profiles panel.

Here's an example:

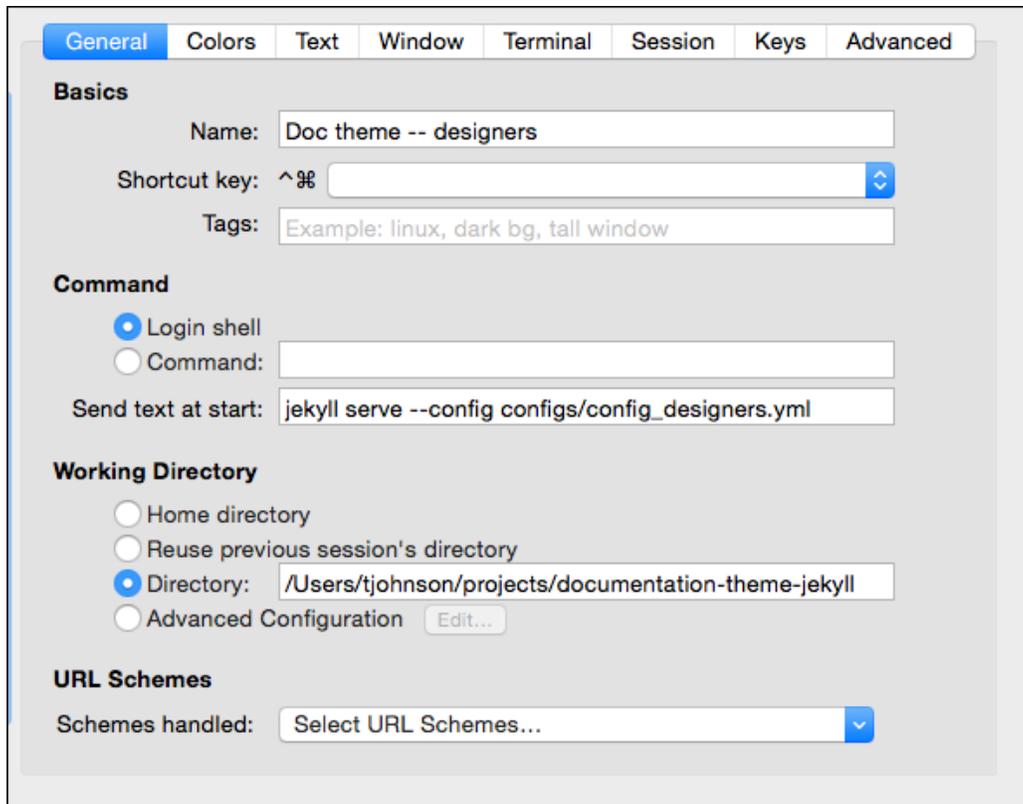

## Launching a profile

1. In iTerm, make sure the Toolbar is shown. Go to **View > Toggle Toolbar**.
2. Click the **New** button and select your profile.

☑ **Tip:** When you're done with the session, make sure to click **Ctrl+C**.

## Pushing builds to server

**Summary:** You can push your build to AWS using commands from the command line. By including your copy commands in commands, you can package all of the build and deploy process into executable scripts.

### Pushing to AWS S3

If you have the AWS Command Line Interface installed and are pushing your builds to AWS, the following commands show how you can build and push to an AWS location from the command line:

```
aws s3 cp ~/users/tjohnson/projects/mydocproject/ s3://[aws path]docpath/mydocproject --recursive
```

```
aws s3 cp ~/users/tjohnson/projects/anotherdocproject2/ s3://[aws path]docpath/anotherdocproject --recursive
```

The first path in the argument is the local location; the second path is the destination.

### Pushing to a regular server

If you're pushing to a regular server that you can ssh into, you can use `scp` commands to push your build. Here's an example:

```
scp -r /users/tjohnson/projects/mydocproject/ name@domain:/var/www/html/mydocproject
```

Similar to the above, the first path is the local location; the second path is the destination.

## Getting around the password prompts in SCP

**Summary:** You can publish your docs via SSH through a Terminal window or more likely, via a shell script that you simply execute as part of the publishing process. However, you will be prompted for your password with each file transfer unless you configure passwordless SSH. The basic process for setting up password less SSH is to create a key on your own machine that you also transfer to the remote machine. When you use the SCP command, the remote machine checks that you have the authorized key and allows access without a password prompt.

### Get rid of password prompts

To remove the password prompts when connecting to servers via SSH:

1. On your local machine, go to your `.ssh` directory:

```
cd ~/.ssh
```

Note that any directory that starts with a dot, like `.ssh`, is hidden. You can view hidden folders by enabling them on your Mac. See [this help topic \(http://ianlunn.co.uk/articles/quickly-showhide-hidden-files-mac-os-x-mavericks/\)](http://ianlunn.co.uk/articles/quickly-showhide-hidden-files-mac-os-x-mavericks/)

. Additionally, when you look at the files in a directory, use `ls -a` instead of just `ls` to view the hidden files.

If you don't have an `.ssh` directory, create one with `mkdir .ssh`.

2. Create a new key inside your `.ssh` directory:

```
ssh-keygen -t rsa
```

3. Press **Enter**. When prompted about “Enter file in which to save the key ...”, press `Enter` again.

This will create a file called `id_rsa.pub` (the key) and `id_rsa` (your identification) in this `.ssh` folder.

When prompted for a passphrase for the key, just leave it empty and press **Enter** twice. You should see something like this:

```
tjohnson-mbpr13:~$ ssh-keygen -t rsa
Generating public/private rsa key pair.
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /Users/yourname/.ssh/id_rsa.
Your public key has been saved in /Users/yourname/.ssh/id_rsa.pub.
The key fingerprint is:
9a:8f:b5:495:39:78:t5:dc:19:d6:29:66:02:e8:02:a0 yourname@yourname-mbpr99.local
```

The key's randomart image is:

```
+--[ RSA 2048 ]-----+
|           |
|+          |
|E          |
|o.   .    |
|.. = o S   |
|.&^  + 7i = o      |
|      = B .      |
|      o O +      |
|      *.o        |
+-----+
```

As you can see, RSA draws a picture for you. Take a screenshot of the picture, print it out, and put it up on your fridge.

4. Open up another terminal window (in iTerm, open another tab), and SSH in to your remote server:

```
ssh <your_username>@remoteserver.com
```

5. Change `<your_username>` to your actual username, such as `tjohnson`.

When you connect, you'll be prompted for your password.

When you connect, by default you are routed to the personal folder on the directory. For example, `/home/remoteserver/<your_username>` . To see this directory, type `pwd` (or `dir` on Windows).

6. Create a new directory called `.ssh` on `remoteserver.com` server inside the `/home/remoteserver/<your_username>` directory.

```
mkdir -p .ssh
```

You can ensure that it's there with this command:

```
ls -a
```

Without the `-a`, the hidden directory won't be shown.

7. Open another Terminal window and browse to `/Users//.ssh` on your local machine.

```
cd ~/.ssh
```

8. Copy the `id_rsa.pub` from the `/.ssh` directory on your local machine to the `/home/remoteserver//.ssh` directory on the `remoteserver` server:

```
scp id_rsa.pub <your-username>@yourserver.com:/home/remoteserver/<your-username>/.ssh
```

9. Switch back into your terminal window that is connected to `remoteserver.com`, change directory to the `.ssh` directory, and rename the file from `id_rsa.pub` to `authorized_keys` (without any file extension):

```
mv id_rsa.pub authorized_keys
```

10. Change the file permissions to 700:

```
chmod 700 authorized_keys
```

Now you should be able to SSH onto remoteserver without any password prompts.

11. Open another terminal (which is not already SSH'd into remoteserver.com) and try the following:

```
ssh <your_username>@remoteserver.com
```

If successful, you shouldn't be prompted for a password.

Now that you can connect without password prompts, you can use the scp scripts to transfer files to the server without password prompts. For example:

```
scp -r ../doc_outputs/mydoc/writers <your-username>@remoteserver:/var/www/html/
```

# Publishing on Github Pages

**Summary:** You can publish your project on Github Pages, which is a free web hosting service provided by Github. All you need is to put your content into a Github repo branch called gh-pages and make this your default branch in your repo. With a Jekyll site, you just commit your entire project into the gh-pages branch and Github Pages will build the site for you.

## Set up your Github repo

1. Make sure you have Git installed. You can download and install [Git for Windows here](https://git-scm.com/download/win) (<https://git-scm.com/download/win>) and [Git for Mac here](https://git-scm.com/download/mac) (<https://git-scm.com/download/mac>). If you're on a Mac, chances are you might already have git installed. You can check by opening up a terminal and typing `which git`.
2. Go to [Github.com](http://github.com) (<http://github.com>) and sign up for an account.
3. Click the + button in the upper-right corner and select **New repository**.
4. Name the repository something like **mydocthem**.
5. Type a description..
6. Select the **Initialize this repository with a README** check box.
7. Add a license if desired.
8. Leave the other options at the defaults and click **Create repository**.
9. Click the **Settings** button.
10. Go to your repository's home page, and click the branch drop-down menu.
11. Create a new branch called **gh-pages**.
12. Click **Settings** and change the default branch to **gh-pages**.
13. Go back to your repository's homepage. With the gh-pages branch selected, copy the **https clone url**:
14. Open a terminal, browse to a convenient location for your project, and type

```
git clone https://github.com/tomjohnson1492/myreponame.git ,  
replacing the https://github.com/tomjohnson1492/myreponame.git  
with your repository's https clone URL that you copied.
```

15. Move the jekyll theme files into this new folder that you just created in the previous step.

16. Open the `_config.yml` file and add the following:

```
url: tomjohnson1492.github.io baseurl: /myreponame
```

Change the url to your github account name, and the baseurl to your repo name.

## Install Bundler

Bundler is a package manager for Ruby that will install all dependencies you might need to build your site locally. I recommend installing Bundler through homebrew. (Sorry, these instructions apply to Mac only.)

1. Install [homebrew](http://brew.sh/) (<http://brew.sh/>):

```
/usr/bin/ruby -e "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/master/install)"
```

2. Install Bundler:

```
gem install bundler
```

## Add the github pages gem

1. In terminal, browse to your Jekyll project directory.
2. Type `bundle init`. This creates a Gemfile and Gemfile.lock in your project.
3. Type `open gemfile`. This opens the gemfile in your default text editor.
4. Add the following in the gemfile (replacing the existing contents):

```
source 'https://rubygems.org'  
gem 'github-pages'
```

5. Run `bundle install`.

6. Add the new jekyll files to git: `git add --all .`
7. Commit the files: `git commit -m "committing my jekyll theme".`
8. Push the files up to your github repo: `git push .`

Github Pages will now automatically build your site. Wait a minute or two, and then visit `tomjohnson1492.github.io/yourreponame`, replacing this path with your github account and branch.

## Customize your URL

You can also customize your Github URL. More instructions on this later....


## Knowledge-base layout

**Summary:** This shows a sample layout for a knowledge base. Each square could link to a tag archive page. In this example, font icons from Font Awesome are used for the graphics, and the layout is pulled from the Modern Business theme. .

Here's the sample knowledge-base style layout:

### Knowledge Base Categories


---



*Getting started*

Lorem ipsum dolor sit amet, consectetur adipisicing elit.


[Learn More \(page 0\)](#)



### *Navigation*

Lorem ipsum dolor sit amet, consectetur adipiscing elit.


[Learn More \(page 0\)](#)



### *Single sourcing*

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

[Learn More \(page 0\)](#)



### *Formatting*

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

[Learn More \(page 0\)](#)

## Generating a list of all pages with a certain tag

If you don't want to link to a tag archive index, but instead want to list all pages that have a certain tag, you could use this code:

Getting started pages:

```
<ul>
{% assign sorted_pages = (site.pages | sort: 'title') %}
{% for page in sorted_pages %}
{% for tag in page.tags %}
{% if tag == "getting_started" %}
<li><a href="{{ page.url | prepend: site.baseurl }}">{{page.titl
e}}</a></li>
{% endif %}
{% endfor %}
{% endfor %}
</ul>
```

Here's the result:

Getting started pages:

- [About Ruby, Gems, Bundler, and other prerequisites \(page 38\)](#)
- [About the theme author \(page 36\)](#)
- [Install Jekyll on Mac \(page 45\)](#)
- [Pages \(page 52\)](#)
- [Posts \(page 58\)](#)
- [Release notes 5.0 \(page 11\)](#)
- [Sample formatting \(page 13\)](#)
- [Sidebar Navigation \(page 70\)](#)
- [Support \(page 37\)](#)
- [Supported features \(page 31\)](#)

## Glossary layout

**Summary:** Your glossary page can take advantage of definitions stored in a data file. This gives you the ability to reuse the same definition in multiple places. Additionally, you can use Bootstrap classes to arrange your definition list horizontally.

You can create a glossary for your content. First create your glossary items in a data file such as `glossary.yml`.

Then create a page and use definition list formatting, like this:

### **fractious**

Like a little mischevious child, full of annoying and constant trouble.

### **gratuitous**

Something that is unwarranted and uncouth, like the social equivalent of a flagrant foul.

### **haughty**

Proud and flaunting it. Holding your head high up like a snooty, too-good-for-everything rich person.

### **gratuitous**

Something that is unwarranted and uncouth, like the social equivalent of a flagrant foul.

### **impertinent**

Brave and courageous especially in a difficult, dangerous situation.

Here's the code:

```
fractious
: {{site.data.glossary.fractious}}

gratuitous
: {{site.data.glossary.gratuitous}}

haughty
: {{site.data.glossary.haughty}}

gratuitous
: {{site.data.glossary.gratuitous}}

impertinent
: {{site.data.glossary.intrepid}}
```

The glossary works well as a link in the top navigation bar.

## Horizontally styled definiton lists

You can also change the definition list ( `dl` ) class to `dl-horizontal` . This is a Bootstrap specific class. If you do, the styling looks like this:

### **fractious**

Like a little mischevious child, full of annoying and constant trouble.

### **gratuitous**

Something that is unwarranted and uncouth, like the social equivalent of a flagrant foul.

### **haughty**

Proud and flaunting it. Holding your head high up like a snooty, too-good-for-everything rich person.

### **gratuitous**

Something that is unwarranted and uncouth, like the social equivalent of a flagrant foul.

**impertinent**

Someone acting rude and insensitive to others.

**intrepid**

Brave and courageous especially in a difficult, dangerous situation.

For this type of list, you must use HTML. The list would then look like this:

```
<dl class="dl-horizontal">
<dt id="fractious">fractious</dt>
<dd>{{site.data.glossary.fractious}}</dd>
<dt id="gratuitous">gratuitous</dt>
<dd>{{site.data.glossary.gratuitous}}</dd>
<dt id="haughty">haughty</dt>
<dd>{{site.data.glossary.haughty}}</dd>
<dt id="benchmark_id">gratuitous</dt>
<dd>{{site.data.glossary.gratuitous}}</dd>
<dt id="impertinent">impertinent</dt>
<dd>{{site.data.glossary.impertinent}}</dd>
<dt id="intrepid">intrepid</dt>
<dd>{{site.data.glossary.intrepid}}</dd>
</dl>
```

If you squish your screen small enough, at a certain breakpoint this style reverts to the regular `dl` class.

Although I like the side-by-side view for shorter definitions, I found it problematic with longer definitions.

## FAQ layout

**Summary:** You can use an accordion-layout that takes advantage of Bootstrap styling. This is useful for an FAQ page.

If you want to use an FAQ format, use the syntax shown on the `faq.html` page. Rather than including code samples here (which are bulky with a lot of nested `div` tags), just look at the source in the `mydoc_faq.html` theme file.

Lorem ipsum dolor sit amet, consectetur adipiscing elit?

Curabitur eget leo at velit imperdiet varius. In eu ipsum vitae velit congue iaculis vitae at risus?

Aenean consequat lorem ut felis ullamcorper?

Lorem ipsum dolor sit amet, consectetur adipiscing elit?

Curabitur eget leo at velit imperdiet varius. In eu ipsum vitae velit congue iaculis vitae at risus?

Aenean consequat lorem ut felis ullamcorper?

Lorem ipsum dolor sit amet, consectetur adipiscing elit?

Curabitur eget leo at velit imperdiet varius. In eu ipsum vitae velit congue iaculis vitae at risus?

Aenean consequat lorem ut felis ullamcorper?

```
[news]: /news.html [mydoc_introduction]: /mydoc_introduction.html
[p1_landing_page]: /p1_landing_page.html [p2_landing_page]:
/p2_landing_page.html [titlepage]: /titlepage.html [tocpage]: /tocpage.html [home]:
/home.html [mydoc_release_notes_50]: /mydoc_release_notes_50.html
[mydoc_sample_formatting]: /mydoc_sample_formatting.html
[mydoc_introduction]: /mydoc_introduction.html [mydoc_supported_features]:
/mydoc_supported_features.html [mydoc_about]: /mydoc_about.html
[mydoc_support]: /mydoc_support.html [mydoc_about_ruby_gems_etc]:
/mydoc_about_ruby_gems_etc.html [mydoc_install_jekyll_on_mac]:
```

[/mydoc\\_install\\_jekyll\\_on\\_mac.html](#) [mydoc\_install\_jekyll\_on\_windows]:  
[/mydoc\\_install\\_jekyll\\_on\\_windows.html](#) [mydoc\_pages]: [/mydoc\\_pages.html](#)  
[mydoc\_posts]: [/mydoc\\_posts.html](#) [mydoc\_conditional\_logic]:  
[/mydoc\\_conditional\\_logic.html](#) [mydoc\_content\_reuse]:  
[/mydoc\\_content\\_reuse.html](#) [mydoc\_collections]: [/mydoc\\_collections.html](#)  
[mydoc\_sidebar\_navigation]: [/mydoc\\_sidebar\\_navigation.html](#)  
[mydoc\_yaml\_tutorial]: [/mydoc\\_yaml\\_tutorial.html](#) [mydoc\_tags]:  
[/mydoc\\_tags.html](#) [mydoc\_series]: [/mydoc\\_series.html](#) [mydoc\_adding\_tooltips]:  
[/mydoc\\_adding\\_tooltips.html](#) [mydoc\_alerts]: [/mydoc\\_alerts.html](#) [mydoc\_icons]:  
[/mydoc\\_icons.html](#) [mydoc\_images]: [/mydoc\\_images.html](#) [mydoc\_labels]:  
[/mydoc\\_labels.html](#) [mydoc\_hyperlinks]: [/mydoc\\_hyperlinks.html](#)  
[mydoc\_navtabs]: [/mydoc\\_navtabs.html](#) [mydoc\_tables]: [/mydoc\\_tables.html](#)  
[mydoc\_syntax\_highlighting]: [/mydoc\\_syntax\\_highlighting.html](#)  
[mydoc\_commenting\_on\_files]: [/mydoc\\_commenting\\_on\\_files.html](#)  
[mydoc\_build\_arguments]: [/mydoc\\_build\\_arguments.html](#) [mydoc\_themes]:  
[/mydoc\\_themes.html](#) [mydoc\_title\_checker]: [/mydoc\\_title\\_checker.html](#)  
[mydoc\_generating\_pdfs]: [/mydoc\\_generating\\_pdfs.html](#) [mydoc\_help\_api]:  
[/mydoc\\_help\\_api.html](#) [mydoc\_search\_configuration]:  
[/mydoc\\_search\\_configuration.html](#) [mydoc\_iterm\_profiles]:  
[/mydoc\\_iterm\\_profiles.html](#) [mydoc\_push\_build\_to\_server]:  
[/mydoc\\_push\\_build\\_to\\_server.html](#) [mydoc\_no\_password\_prompts\_scp]:  
[/mydoc\\_no\\_password\\_prompts\\_scp.html](#) [mydoc\_publishing\_github\_pages]:  
[/mydoc\\_publishing\\_github\\_pages.html](#) [mydoc\_kb\_layout]:  
[/mydoc\\_kb\\_layout.html](#) [mydoc\_glossary]: [/mydoc\\_glossary.html](#)  
[mydoc\_faq\_layout]: [/mydoc\\_faq\\_layout.html](#) [mydoc\_troubleshooting]:  
[/mydoc\\_troubleshooting.html](#) [mydoc\_tag\_archives\_overview]:  
[/mydoc\\_tag\\_archives\\_overview.html](#) [tag\_formatting]: [/tag\\_formatting.html](#)  
[tag\_navigation]: [/tag\\_navigation.html](#) [tag\_content\_types]:  
[/tag\\_content\\_types.html](#) [tag\_publishing]: [/tag\\_publishing.html](#)  
[tag\_special\_layouts]: [/tag\\_special\\_layouts.html](#) [tag\_collaboration]:  
[/tag\\_collaboration.html](#) [tag\_troubleshooting]: [/tag\\_troubleshooting.html](#)  
[mydoc\_hyperlinks.html#managed-links]: [/mydoc\\_hyperlinks.html#managed-links.html](#) [index.html#variable-includes]: [/index.html#variable-includes.html](#)  
[index.html#htmltables]: [/index.html#htmltables.html](#) [index.html#someIdTag]:  
[/index.html#someIdTag.html](#) [titlepage]: [/titlepage.html](#) [tocpage]: [/tocpage.html](#)  
[p1\_landing\_page]: [/p1\\_landing\\_page.html](#) [p1\_sample1]: [/p1\\_sample1.html](#)  
[p1\_sample2]: [/p1\\_sample2.html](#) [p1\_sample3]: [/p1\\_sample3.html](#) [p1\_sample4]:  
[/p1\\_sample4.html](#) [p1\_sample5]: [/p1\\_sample5.html](#) [p1\_sample6]:  
[/p1\\_sample6.html](#) [p1\_sample7]: [/p1\\_sample7.html](#) [titlepage]: [titlepage.html](#)  
[tocpage]: [tocpage.html](#) [p2\_landing\_page]: [/p2\\_landing\\_page.html](#) [p2\_sample1]:  
[/p2\\_sample1.html](#) [p2\_sample2]: [/p2\\_sample2.html](#) [p2\_sample3]:  
[/p2\\_sample3.html](#) [p2\_sample4]: [/p2\\_sample4.html](#) [p2\_sample5]:  
[/p2\\_sample5.html](#) [p2\_sample6]: [/p2\\_sample6.html](#) [p2\_sample7]:  
[/p2\\_sample7.html](#) [p2\_sample8]: [/p2\\_sample8.html](#) [p2\_sample9]:

/p2\_sample9.html [p2\_sample10]: /p2\_sample10.html [p2\_sample11]:  
/p2\_sample11.html [p2\_sample12]: /p2\_sample12.html [p2\_sample13]:  
/p2\_sample13.html [p2\_sample14]: /p2\_sample14.html [news]: /news.html  
[mydoc\_introduction]: /mydoc\_introduction.html [p1\_landing\_page]:  
/p1\_landing\_page.html [p2\_landing\_page]: /p2\_landing\_page.html

# Troubleshooting

**Summary:** This page lists common errors and the steps needed to troubleshoot them.

## Issues building the site

### Address already in use

When you try to build the site, you get this error in iTerm:

```
jekyll 2.5.3 | Error: Address already in use - bind(2)
```

This happens if a server is already in use. To fix this, edit your config file and change the port to a unique number.

If the previous server wasn't shut down properly, you can kill the server process using these commands:

```
ps aux | grep jekyll
```

Find the PID (for example, it looks like "22298").

Then type `kill -9 22298` where "22298" is the PID.

Alternatively, type the following to stop all Jekyll servers:

```
kill -9 $(ps aux | grep '[j]ekyll' | awk '{print $2}')
```

### shell file not executable

If you run into permissions errors trying to run a shell script file (such as `mydoc_multibuild_web.sh`), you may need to change the file permissions to make the sh file executable. Browse to the directory containing the shell script and run the following:

```
chmod +x build_writer.sh
```

## shell file not runnable

If you're using a PC, rename your shell files with a .bat extension.

### “page 0” cross references in the PDF

If you see “page 0” cross-references in the PDF, the URL doesn't exist. Check to make sure you actually included this page in the build.

If it's not a page but rather a file, you need to add a `noCrossRef` class to the file so that your print stylesheet excludes the counter from it. Add

```
class="noCrossRef"
```

 as an attribute to the link. In the `css/printstyles.css` file, there is a style that should remove the counter from anchor elements with this class.

### The PDF is blank

Check the `prince-list.txt` file in the output to see if it contains links. If not, you have something wrong with the logic in the `prince-list.txt` file. Check the `conditions.html` file in your `_includes` to see if the audience specified in your configuration file aligns with the `buildAudience` in the `conditions.html` file

### Sidebar not appearing

If you build your site but the sidebar doesn't appear, check the following:

Look in `_includes/custom/sidebarconfigs.html` and make sure the conditional values there match up with values you're using in each page's frontmatter.

Make sure each TOC item has an `output` property that specifies `web` or `pdf`.

Understanding how the theme works can be helpful in troubleshooting. The `_includes/sidebar.html` file loops through the values in the `_data/sidebar.yml` file. There are `if` statements that check whether the conditions (as specified in the `conditions.html` file) are met. If the `sidebar.yml` item doesn't have the right output, then it won't get displayed in the sidebar. It would instead get skipped.

### Sidebar isn't collapsed

If the sidebar levels aren't collapsed, usually your JavaScript is broken somewhere. Open the JavaScript Console and look to see where the problem is. If one script breaks, then other scripts will break too, so troubleshooting it is a little tricky.

### Search isn't working

If the search isn't working, check the JSON validity in the search.json file in your output folder. Usually something is invalid. Identify the problematic line, fix the file, or put `search: exclude` in the frontmatter of the file to exclude it from search.